

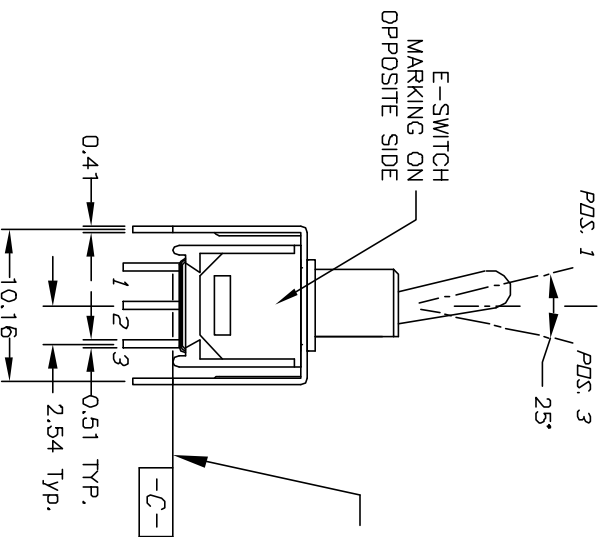


RECOMMENDED P.C.B. LAYOUT

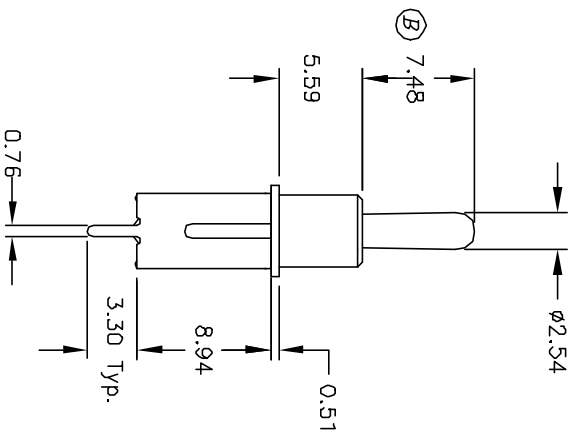

CIRCUIT: SPDT CONTACT CONFIGURATION

| SWITCH FUNCTION | | | |
|-----------------|--------|--------|--|
| PDS. 1 | PDS. 2 | PDS. 3 | |
| DN | NONE | (DN) | |
| 2-3 | DPEN | 2-1 | |

() =Momentary

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4 (VA) max. @20 VAC or DC max.
5. FIXED TERMINAL & MOVING CONTACT: Cu alloy w/ Gold plate over Ni plate.
6. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C

| | | | | | | | | | |
|---|--|---------|--|--------------------------|--|---------|--|---------|--|
| REV. B | | 11538 | | REVISED PART DESCRIPTION | | 6/11/01 | | CJB | |
| REV. A | | ECN NO. | | DESCRIPTION | | DATE | | CHKD | |
| <p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</p> | | | | | | | | | |
| <p>E-SWITCH®</p> | | | | | | | | | |
| <p>TITLE: 200 MSP-2 TS B2 VS2 R E</p> | | | | | | | | | |
| SCALE | | 2:1 | | DATE | | 6/11/01 | | DR | |
| | | | | CJB | | DWG | | T213010 | |
| REV | | B | | | | | | | |