

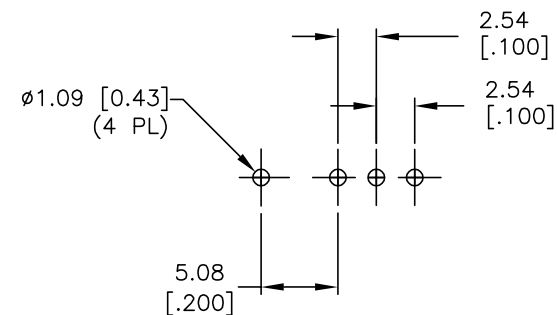
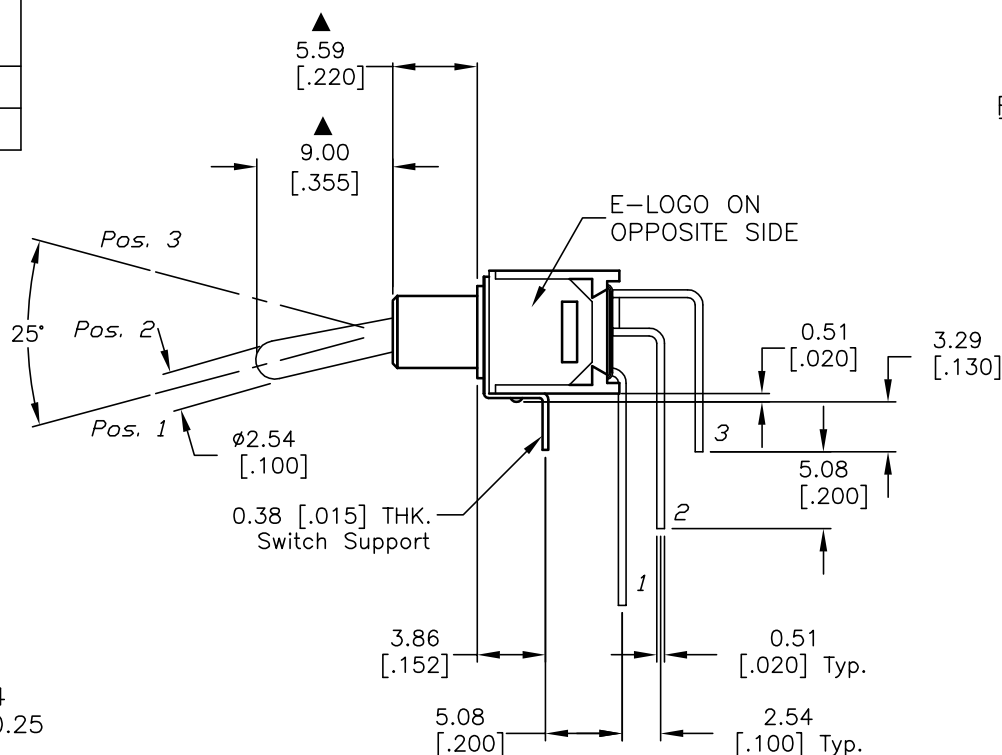


CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1

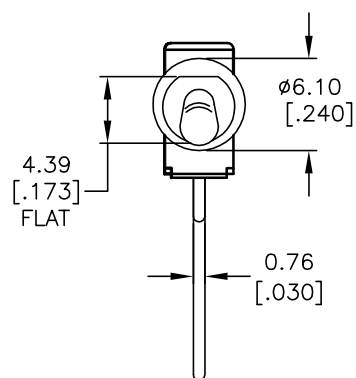

RECOMMENDED P.C.B. LAYOUT

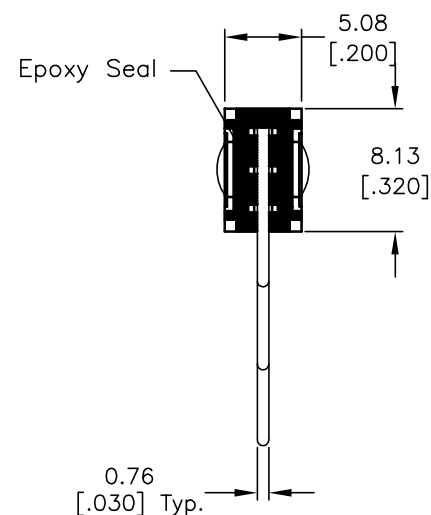

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
- TERM. NOS. FOR REF. ONLY
- RATING: 0.4VA @20V AC or DC max.
- FIXED TERM. MOVING CONTACT:
Copper Alloy w/Gold plate
over Nickel plate
- ELECTRICAL LIFE: 30,000 make-and-break cycle
at full load.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®

A	13807	RELEASED FOR PRODUCTION	2/26/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE

200MSP3T1B2M7RE

SCALE

2:1

DATE

2/26/04.

DR

AR

DWG

T212012

REV

A