



P.C.B. MOUNTING HOLES

POS. 2

POS. 1 POS. 3

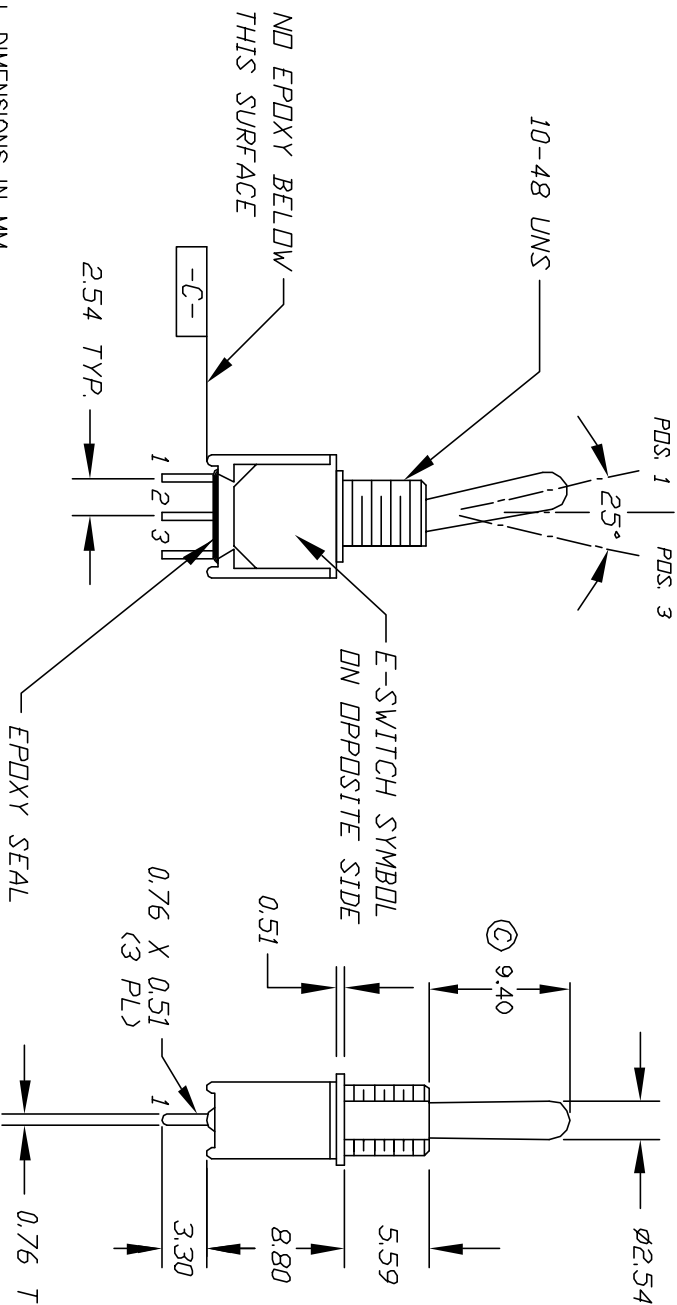

CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
<DN>	OFF	<DN>	
2-3	OPEN	2-1	

< > = MOMENTARY

- NOTES:
1. ALL DIMENSIONS IN MM
  2. GENERAL TOLERANCE: 0.00=±0.25
  3. TERM. NOS. FOR REF ONLY
  4. RATING: 3A @120VAC OR 28VDC; 1A @250VAC
  5. ELECTRIC LIFE: 30,000 MAKE AND BREAK CYCLES AT FULL LOAD
  6. INSULATION RESISTANCE: 1,000 MEGA-OHMS MIN
  7. DIELECTRIC STRENGTH: 1,000V RMS @SEA LEVEL
  8. OPERATING TEMP.: -30°C TO +85°C

C	11498	REVISED ACTUATOR	5/11/01	CJB
B	11113	REVISED & REDRAWN	12/13/00	PML
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

TITLE		SCALE		DATE		DR		DWG		REV	
200 MSP-4 T1 B1 M2 Q E		2:1		10/20/00		PML		T211083		C	
<b>E-SWITCH®</b>											
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED											