
Pomona®

Model 3751 Miniature Size Aluminum Box With Cover BNC Female/Female

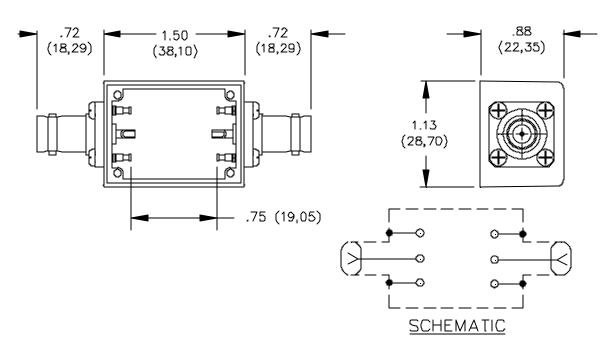

MATERIALS:

Connector: BNC (F)

Body: Tarnish Resistant Plating, Center Contact: Gold Plated Beryllium Copper

Marking: "Pomona 2451"

Solder Turret Terminal Screws: Steel, 4 ea. #4-40

Shielded Housing: Die cast aluminum, alloy A380 or A384

Finish: Blue baked enamel per Federal Standard 595 #25109 over Phosphoric Etch per MIL-C-15328. Marking: "Pomona Electronics Calif."

Cover: .040 thick aluminum 1100-H14 Finish: Clear anodized per MIL-A-8625 Marking: "Pomona 3751"

RATINGS:

Operating Voltage: Inner conductor/Shield: 500 VRMS Max. Operating Temperature: -55°C to +150°C Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 3751

All dimensions are in inches. Tolerances (except noted): $.xx = \pm.02$ " (,51 mm), $.xxx = \pm.005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99	Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS	Technical Assistance: 800-241-2060
S:\Engineering\Release\DataSheets\FlukeDataSheet\d3751_1_01.doc	