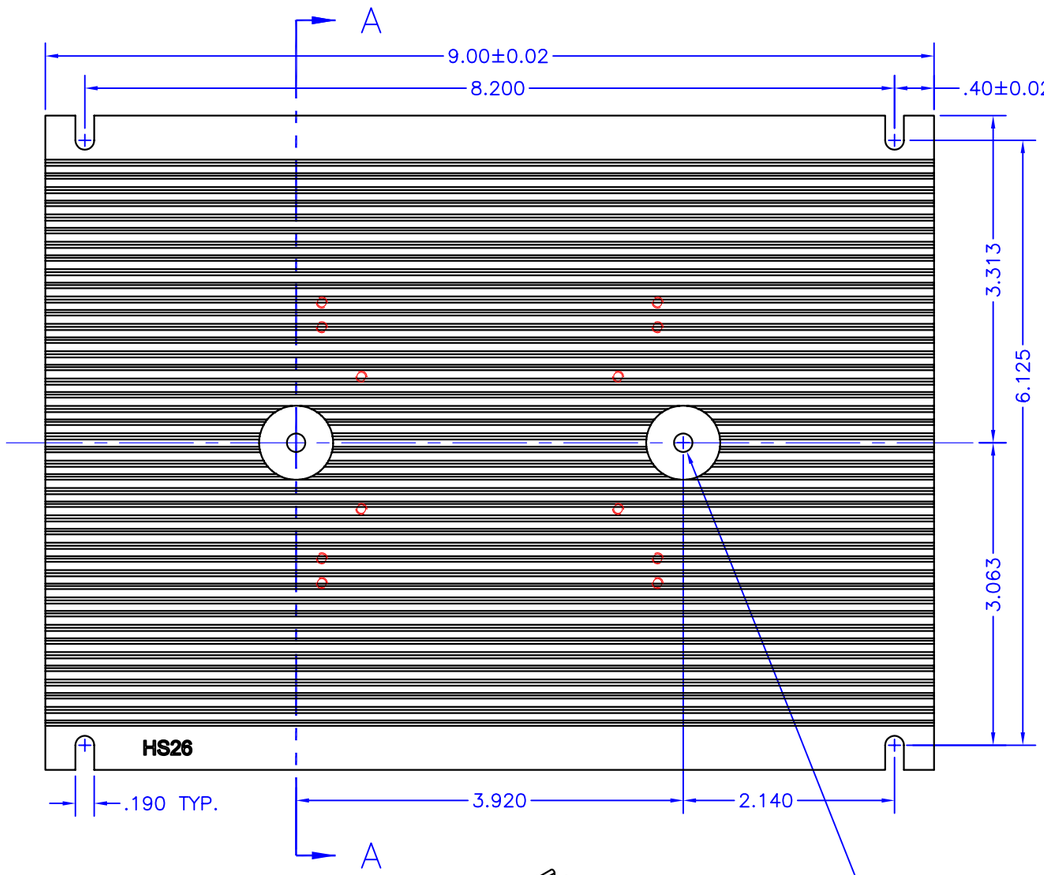

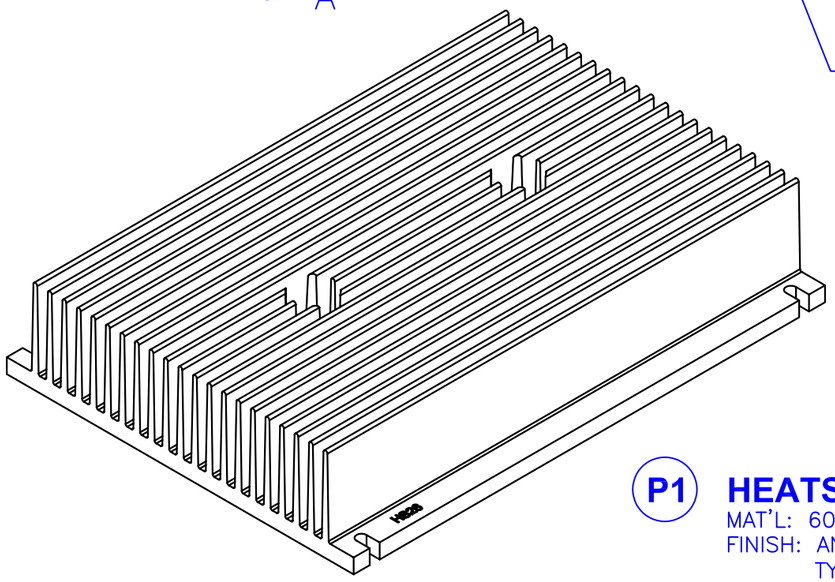

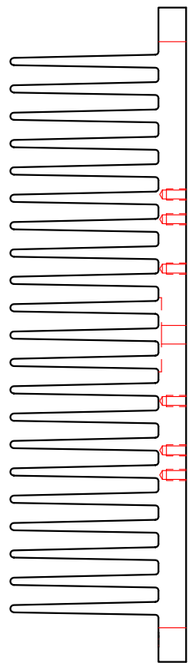

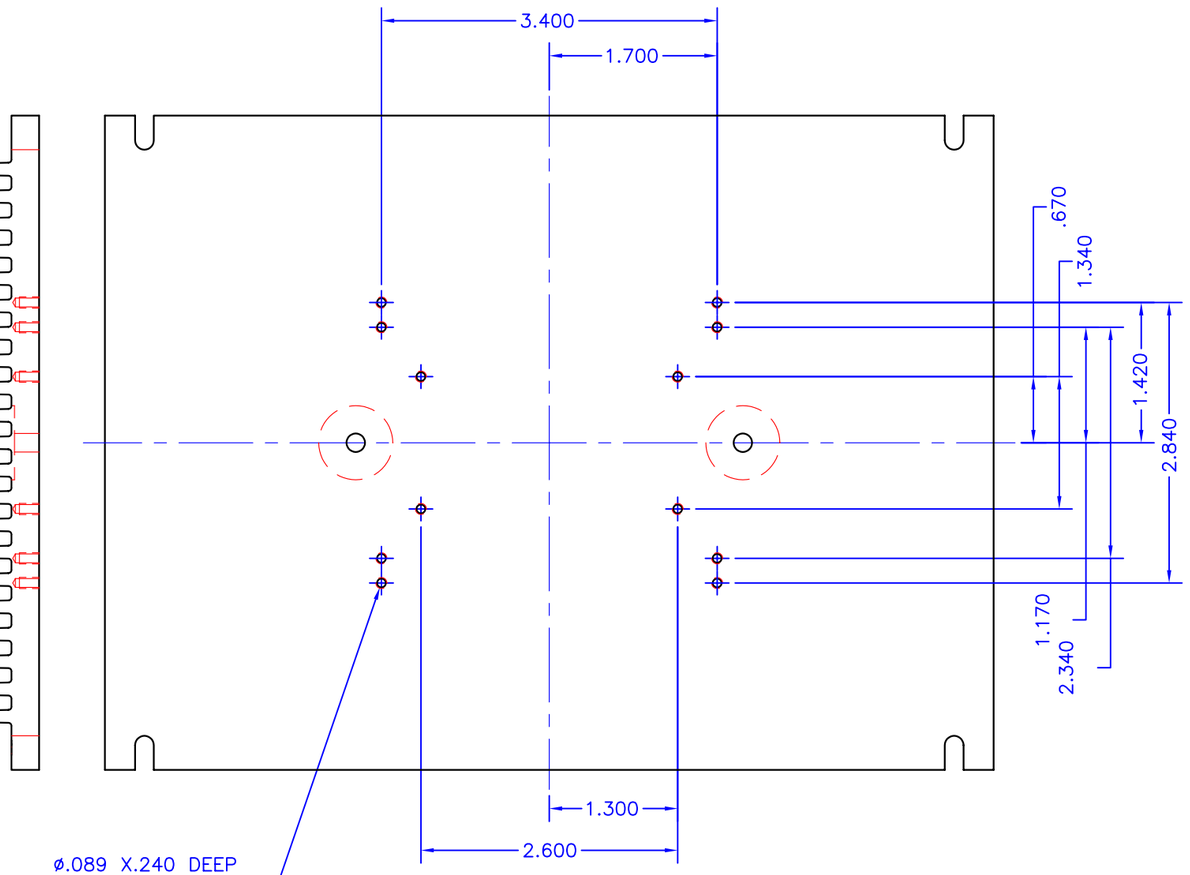

SECTION A–A

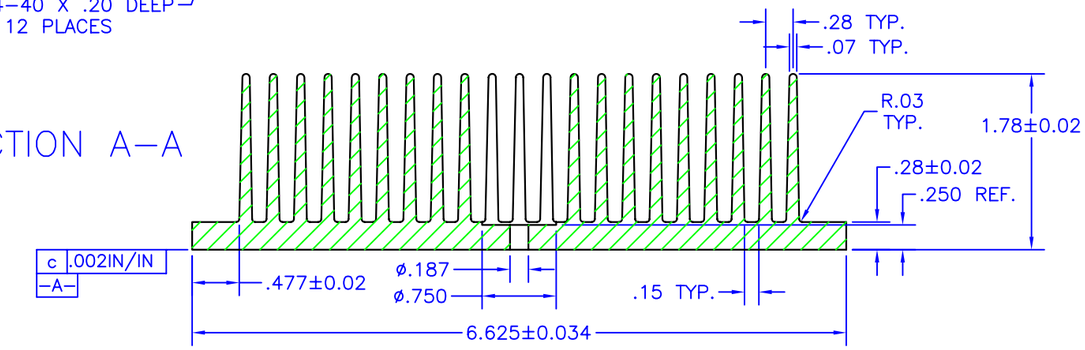

P1 **HEATSINK**

MAT'L: 6063–T5 ALUMINUM (AAVID EXTRUSION #69800)
FINISH: ANODIZE PER MIL–A–8625, TYPE II, CL 2, BLACK
TYPICAL BREAKDOWN VOLTAGE > 300V

NOTES:

1. UNLESS OTHERWISE NOTED, ALL DIMENSIONS ARE IN INCHES.
2. BREAK ALL SHARP EDGES, DE–BURR & REMOVE LOOSE CHIPS.
3. MARK WITH CONTRASTING INK AS SHOWN, IF SPECIFIED BY PURCHASE ORDER.

TOLERANCES – UNLESS OTHERWISE SPECIFIED										
.XX = ±.01 .XXX = ±.005 ANG. = ±.5'	APEX MICROTECHNOLOGY	TITLE: MODULAR PACKAGE HEATSINK							MODEL: HS26	
		SUBJECT: MECHANICAL DRAWING								
		ENG. D–M	TECH/DSN. D–M	DCA 31336	SH. 1 OF 1	FILENAME: HS26–B	REV B	DATE 09/18/03		