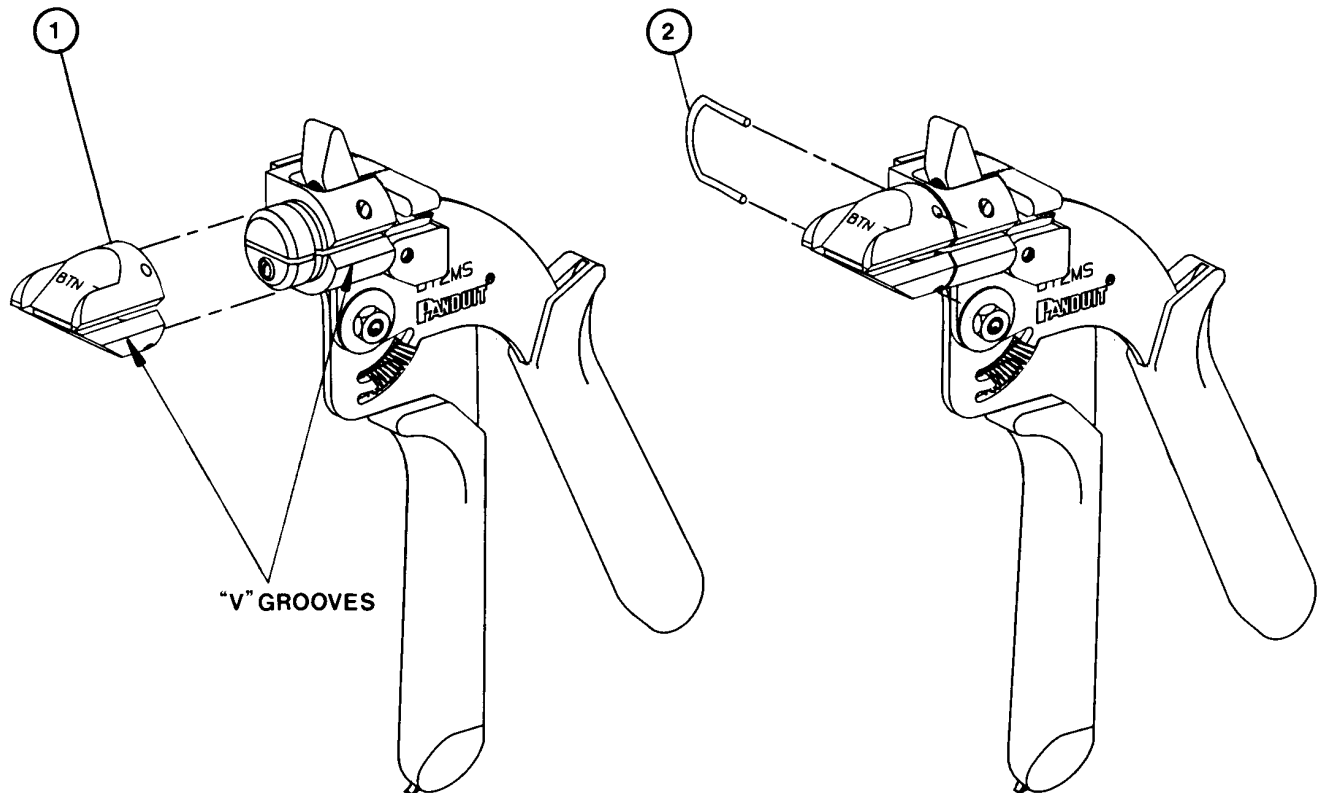


INSTALLATION AND ASSEMBLY INSTRUCTIONS

© Panduit Corp. 1996

**CONTENTS**

<u>ITEM</u>	<u>QTY</u>	<u>DESCRIPTION</u>
1	1	BT2N75 NOSE
2	1	SPRING CLIP

INSTALLATION OF BT2N75 NOSE**WARNING:** SAFETY GLASSES MUST BE WORN DURING THE INSTALLATION OF THIS ITEM.

1. Slide the BT2N75 Nose 1 onto the tool so that the "V" grooves are aligned.
2. Hold the nose on the tool while inserting and attaching the spring clip 2 on the side of the nose opposite the "V" groove.
3. Carefully tap the spring clip in until it is flush with the side of the nose.

For Worldwide Subsidiaries
and Sales Offices visit
Website: www.panduit.com



Technical Support:
888-506-5400, ext. 3255
Fax: 630-759-7532
E-mail: tlinfo@panduit.com