
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

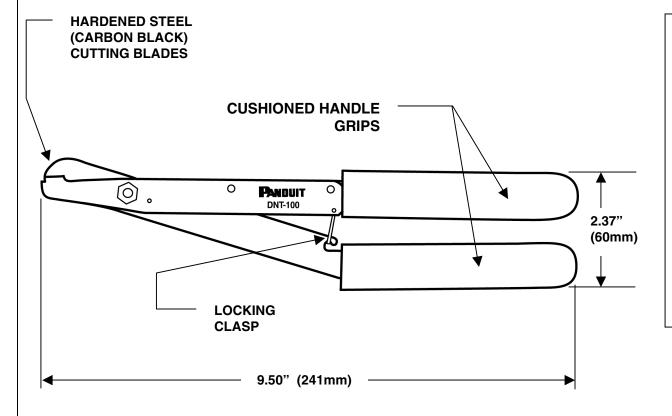

## **NOTES:**

For use with *PANDUCT* Plastic Wiring Duct.

- Used to notch the duct sidewall down to the scoreline to facilitate finger breakouts for corner and 'T' junctions.
- Spring loaded in open position.
   (Closed position shown in drawing.)

## DIMENSIONS ARE FOR REFERENCE ONLY.

WEIGHT: 9.1 oz.

(258 gr.)

F:/rvusers/engdocsnew/custdwg/ WD24978A01\_00 DNT-100.doc

										NT-100 DUC	CORP. TINLEY PARK, ILLINOI T NOTCHING TOOL IER DRAWING	IS
									UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.x) ± (.xxx) ± (.xx) ± ANGLES ± UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.			
									DRAWN BY: BLR	MATL:	SCALE NONE	
00	3-15-05	BLR	MBR	RLSD; RPLCS: DNT-09534A-CD	4153		DLWE		DATE: 3-15-05		DRAWING NO. WD24978A01	DWG
REV	DATE	вү	CHK'D	DESCRIPTION	ECN	-R	CUST	SUP	CHK'D: MBR		WD24976A01	SIZE