

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16		B	REVISED PER OUB0-0048-01	12JUL2001	TA	SB

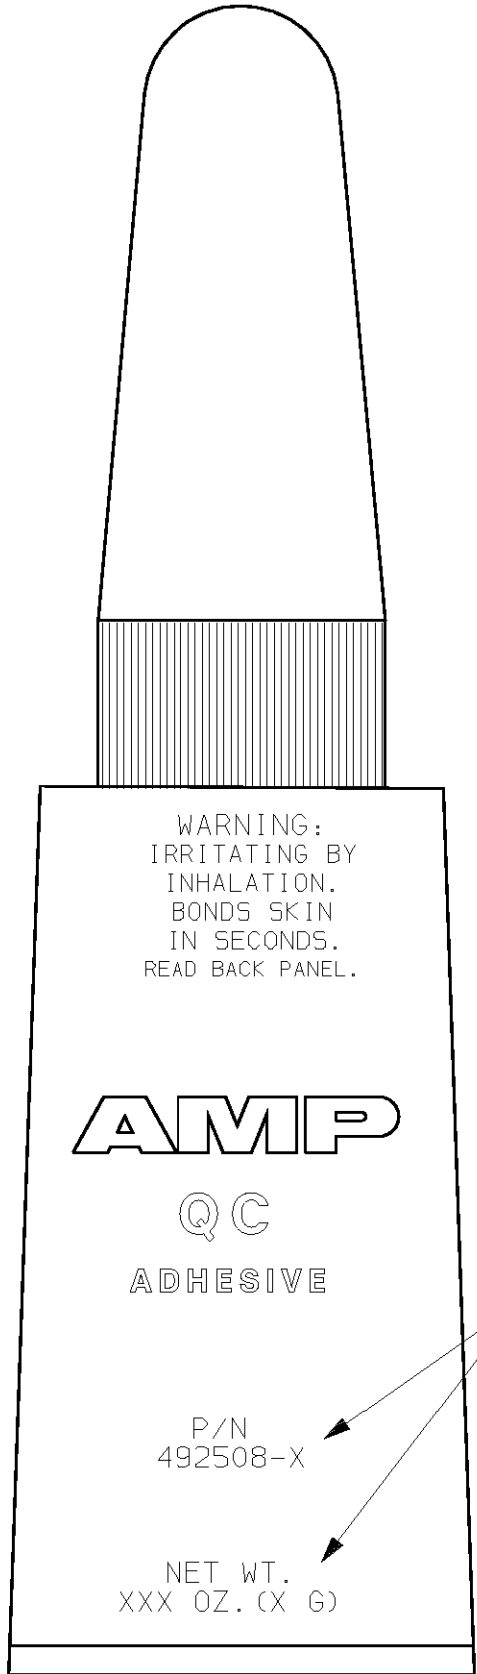

1. INTENDED USE:
 THIS ADHESIVE IS INTENDED FOR USE WITH AMP EPOXY STYLE MULTIMODE FIBER OPTIC CONNECTORS, IN TIA/EIA 568 PREMISE WIRING TYPE APPLICATIONS IN PROTECTED ENVIRONMENTS WHERE SERVICE TEMPERATURE RANGE DOES NOT EXCEED -10°C TO +60°C.
2. IMPORTANT: SEE AMP MSDS SHEET 125-6393 PRIOR TO USE. AVAILABLE FROM AMPFAX AT 1-(800)522-6752.
3. SEE IS 408-4428 FOR SUPPLEMENTARY INSTRUCTIONS FOR USING WITH AMP OPTIMATE FIBER OPTIC CONNECTORS. AVAILABLE FROM AMP FAX AT 1(800)522-6752.

OBSOLETE	0.31 OZ. (9G) TUBE	492508-2
	0.10 OZ. (3G) TUBE	492508-1
	NET WEIGHT	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.P. MARSHALL 7-9-97	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK L.E. SAUERWEIN 7-9-97		
		APVD K. MONROE 7-9-97	NAME AMP QC ADHESIVE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE	
0 PLC ±-		APPLICATION SPEC	CAGE CODE	
1 PLC ±-			DRAWING NO	
2 PLC ±-			RESTRICTED TO	
3 PLC ±-			A3 00779 C-492508	
4 PLC ±-				
ANGLES ±-				
MATERIAL -		WEIGHT -		
FINISH -				
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1
			REV B	