

# **FIT**® Preferred Heat Shrink Products

## **POWERFUL FLAMELESS BUTANE TORCH**

### **FIT**® FBT-1

#### CHOOSE **FIT**® FBT-1 FOR:

- Where High Volume Flameless Heat is Required
- Portable Flameless Heat Repair
- Adjustable Temperature Control
- **FIT**® Preferred Heat Shrink Tubing Applications

#### **FIT**® FBT-1 APPLICATIONS:

- Maintenance/Repair
- Marine
- Automotive
- Aircraft

#### CHARACTERISTICS

##### OPERATING TEMPERATURE:

- Up to 750°C (1400°F)

##### COLOR DESCRIPTION:

- Blue

##### PHYSICAL PROPERTIES:

- Length: 190mm (7.5 in)
- Weight: (when gas-filled) 135 g
- Nozzle Size: I.D.: 14mm (0.55 in)  
O.D.: 20mm (0.79 in)
- Operating Time (one gas filling):  
Approximately 120 minutes at Mid Setting

##### CHEMICAL PROPERTIES:

- Butane Container Capacity: 20ml
- Refill: Standard Butane Fuel

#### AVAILABILITY

- One Piece Per Package




*New!*

THIS TOOL HAS BEEN ESPECIALLY DESIGNED FOR USE WITH 100% BUTANE GAS.

ANY OTHER BUTANE-PROPANE MIX OR OTHER FUEL GASES SHOULD NOT BE USED.

TO INSURE SAFE OPERATION WHEN USING THE **FIT**® FBT-1, PLEASE READ ALL INSTRUCTIONS CAREFULLY PRIOR TO USE.

BUTANE IS NOT INCLUDED.

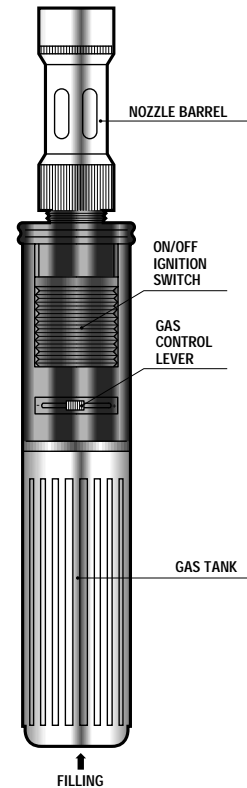

Toll Free: 1-800-52 ALPHA • Telephone: 908-925-8000 • Fax: 908-925-6923  
Europe/UK Telephone: +44 (0) 1932 772422 • Europe/UK Fax: +44 (0) 1932 772433

Web Site: [www.alphawire.com](http://www.alphawire.com)  
Email: [info@alphawire.com](mailto:info@alphawire.com)