



## Electrical

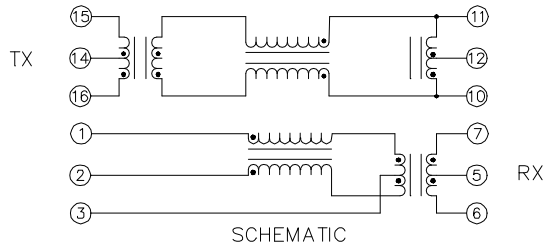

### ELECTRICAL SPECIFICATIONS @ 25°C

TYPE	TRANSMITTER	RECEIVER
INSERTION LOSS	: -1.0dB MAX (1 TO 60 MHz) : -2.0dB MAX @ 100 MHz : -3.0dB MAX @ 125 MHz	. . . -1.0dB MAX (1 TO 60 MHz) . . . -2.0dB MAX @ 100 MHz . . . -3.0dB MAX @ 125 MHz
RETURN LOSS (16-15) TO (10-11) 100 OHM TO 100 OHM	: -18dB MIN (1 TO 30 MHz) : -12dB MIN @ 60 MHz : -10dB MIN @ 80 MHz	. . . -18dB MIN (1 TO 30 MHz) . . . -12dB MIN @ 60 MHz . . . -10dB MIN @80 MHz
RETURN LOSS (16-14) TO (10-11) 25 OHM TO 25 OHM	: : -17dB MIN (1 TO 10 MHz) :	
COMMON MODE REJECTION	: -45dB MIN (1 TO 30MHz) : -35dB MIN (30 TO 100 MHz) : -9dB MIN (100 TO 500MHz)	. . . -45dB MIN (1 TO 30MHz) . . . -35dB MIN (30 TO 100MHz) . . . -9dB MIN (100 TO 500MHz)
CROSS TALK	: -35dB MIN (1 TO 80 MHz)	. . . -35dB MIN (1 TO 80MHz)
ISOLATION	: 1500VRMS (PRI-SEC)	. . . 1500VRMS (PRI-SEC)
OCL (REF) (16-15) OPEN 10,11	: 350μH MIN @100KHz, 100mV, 8mA	

## Mechanical

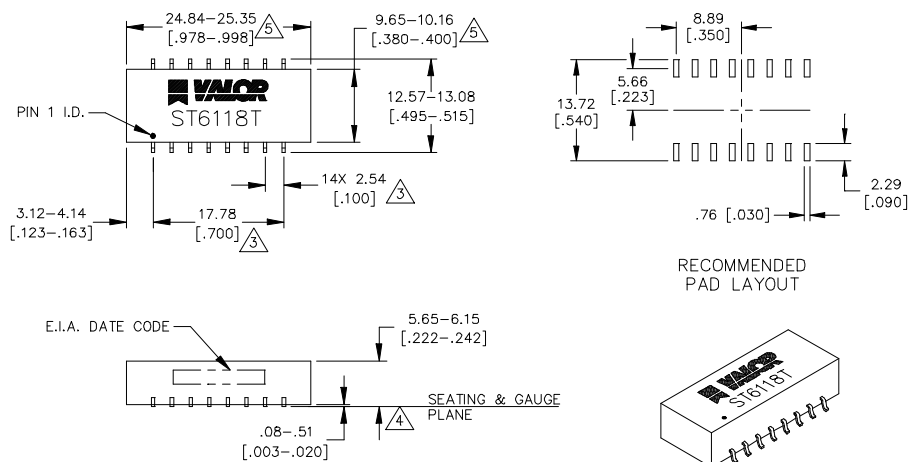

- △ DIMENSIONS NOT TO INCLUDE MAXIMUM FLASH .25 [.010].
  - △ COPLANARITY: .10 [.004].
  - △ LEADS WITHIN .13 [.005] RADIUS OF TRUE POSITION AT GAUGE PLANE WITH MAXIMUM MATERIAL CONDITION AND UNIT INSTALLED.
  - 2. LEAD: SOLDERABILITY PER MIL-STD-202, METHOD 208.
  - △ PACKAGE: THERMOSET PLASTIC, BLACK, SELF-EXTINGUISHING PER UL94V-0.
- NOTES: UNLESS OTHERWISE SPECIFIED

WEBSITE [www.valorinc.com](http://www.valorinc.com) E-MAIL [marketing@valorinc.com](mailto:marketing@valorinc.com)

**NORTH AMERICA**  
tel 1-800-31 VALOR  
fax 619-537-2525

**ASIA/PACIFIC**  
tel +852-2953-1000  
fax +852-2953-1333

**EUROPE**  
tel +44-1727-824 875  
fax +44-1727-824 898