
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

© 2005, Projects Unlimited Inc.

SPECIFICATIONS

REVISIONS				
LTR	DESCRIPTION	DATE	APPROVED	
-	RELEASED FROM ENGINEERING	3/22/06		

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	1.5	Vdc
OPERATING VOLTAGE RANGE	1.2 ~ 3	Vdc
RATED CURRENT (MAX)	25	mA
MINIMUM SPL @ 10 CM	80	dBA
RESONANT FREQUENCY	2300±500	Hz
TONE OR PULSE RATE	CONTINUOUS	_
OPERATING TEMPERATURE	−25 ~ +70	•c
STORAGE TEMPERATURE	-30 ~ +80	•c
HOUSING MATERIAL	NORYL	_
TERMINAL MATERIAL	Sn PLATED COPPER	_
WEIGHT	2	grams

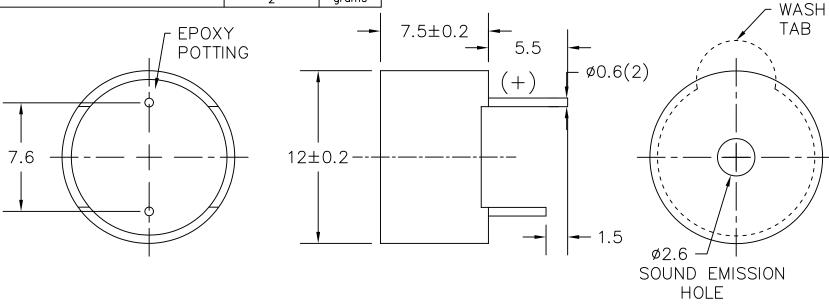

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT

projects © unlimited UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ±0.5 AND
ANGLES ARE ±3*. Dayton , Ohio **INDICATOR** APPROVALS DATE DRAWN TG 3/06 DRAWING NO. CHECKED SIZE BR 3/06 AI-1223-TWT-2-R APPROVED EΡ 3/06 SHEET 1 OF DO NOT SCALE DRAWING SCALE: N.T.S.

AI-1223-TWT-2-R.DWG