


1830⁺⁷⁶₋₂₅ (6FT⁺³₋₁IN)

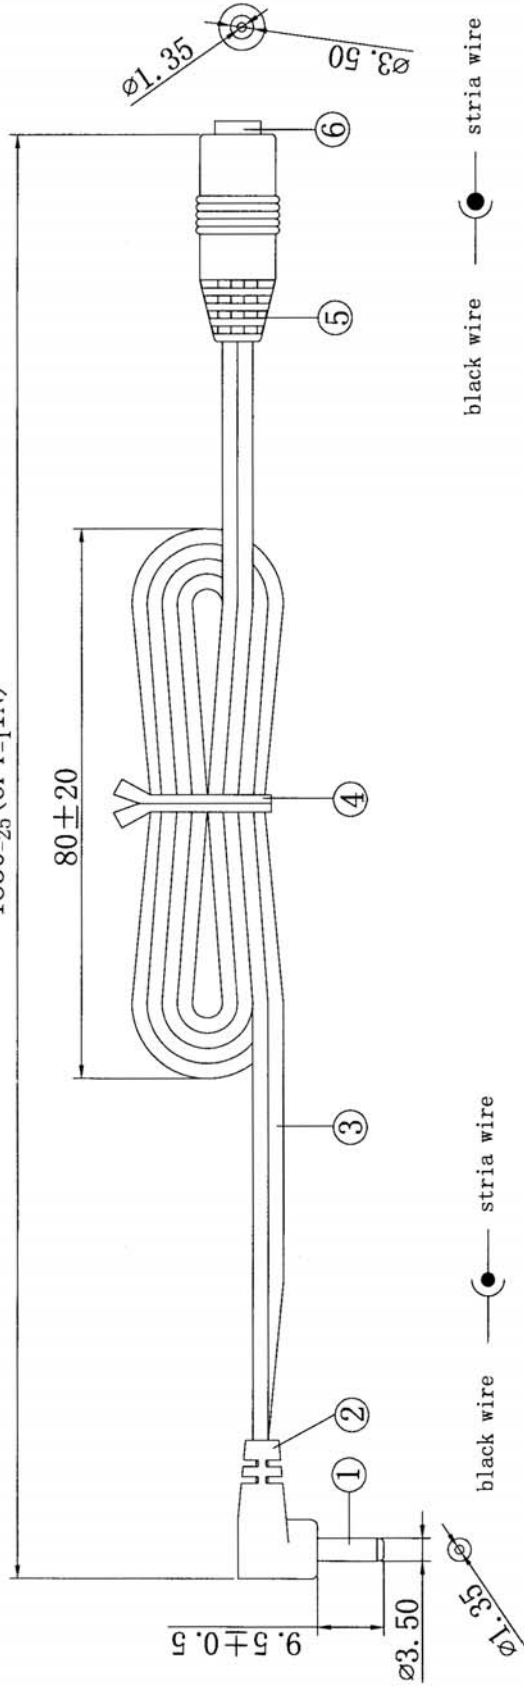

No.	DESCRIPTION	SPECIFICATION	UNIT	Q'TY
1	PLUG	ø3.50x1.35x18±0.5mm black color hardware Ni-plate.	EA	1
2	PLUG HOLDER	used 30P black color PVC.	EA	1
3	CABLE	UL2468 AWG#24 0.16 x 11 rootlets x 2C, black color twin wire, 0.DI. 8 by 3.6 ±0.1mm.	MM	1840 ⁺²⁰ ₋₀
4	BAND WIRE	black enfold gluey wire.	MM	89±3
5	SOCKET	Used 30P black color PVC.	EA	1
6	PLUG HOLDER	ø3.50x1.35 socket Ni-plate	EA	1

FUNCTION TEST: No open, no reversed polarity, no short-circuit, no INT

HI-POT TEST: 600VAC, 0.5mA, 1Second.
CABLE ASSEMBLY SHALL BE IN COMPLIANCE WITH RoHS REQUIREMENT.

		Description: Extension Cable, 3.5mm x 1.35mm DC Jack to R/A P7 Plug, 6ft, 24AWG Zip Cord
	UNITS mm Tolerance: X = ± 0.5 .X = ± 0.25 .XX = ± 0.05 07-06-2006	Part Number: CA-2214

