


### Standard Bushings (for Connectors with Straight Posted Contacts, PC Board Mounted)

**Material**  
Aluminum


**Kit Numbers**

\*Parts are individually bulk packed for multiple kit orders.



**Note:** Standoff Bushings are used with a plug or receptacle of PC board mounted connectors.

Part No.	Dim. A	Dim. B	Packaged
205933-3	.435 11.05	.250 6.35	2 Per Bag
205933-4	.435 11.05	.250 6.35	*Bulked Pack
443279-2	.246 6.25	.190 4.83	2 Per Bag
443279-3	.246 6.25	.190 4.83	*Bulk Pack

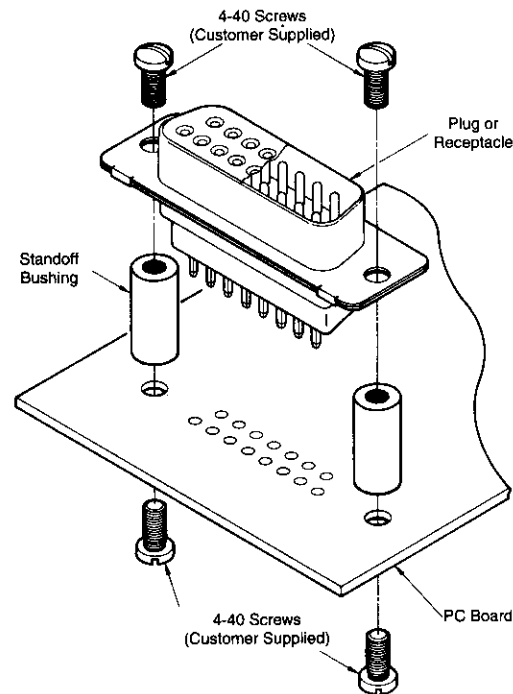

### Dust Covers

Dust covers for subminiature D connectors are not manufactured by Tyco Electronics. They may be purchased from:\*

**Capiugs**  
2150 Elmwood Avenue  
Buffalo, NY 14207  
Phone: (716) 876-9855  
Fax: (716) 874-1680

See Catalog 1307612 for additional hardware such as cable clamps, strain reliefs, etc.

**Notes:**

1. There are no cable clamp/strain relief hardware available for size 6 connectors.


2. Cable clamp/strain relief hardware cannot be used with the Power/Coax/Combination Product shown on pages 5122 and 5123 of this catalog.

\* Capiugs is not an affiliate of Tyco Electronics.

### EMI/RFI Gaskets

**Material and Finish**

Brass, .006 [0.15] thick; bright tin plated

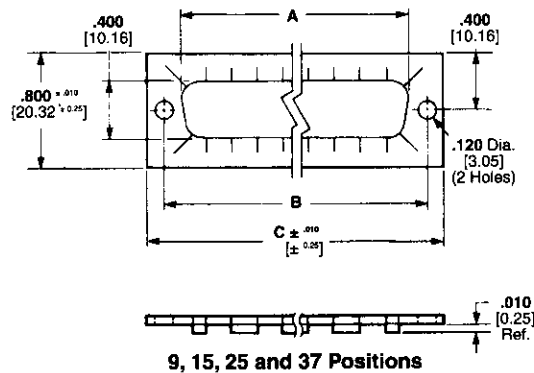

9, 15, 25 and 37 Positions

Shell Size (No. of Contact Pos.)	Dimensions			Gasket Part No.
	A	B	C	
1 (9)	.746 18.95	.984 24.99	1.220 30.99	747024-3
2 (15)	1.074 27.28	1.312 33.32	1.555 39.50	747025-3
3 (25)	1.614 41.00	1.852 47.04	2.100 53.34	745776-3
4 (37)	2.266 57.56	2.500 63.50	2.730 69.34	745777-3