

ILAPS™ AN101101

INTRINSICALLY LINEAR ANGULAR POSITION SENSOR




APPLICATIONS:

- · Throttle and valve position sensing
- User interface controls (vehicles, gaming)
- · Pedal position sensing
- · Implement position sensing
- Gear selection
- · Joystick position

FEATURES:

- · Patented non-contact angular position sensor
- Magnet/sensor orientation provides intrinsically linear output over 100 degrees of electrical rotation (120 degrees mechanical rotation) without need for electrical compensation
- Provided with programmed output or end-user re-programmable to eliminate mechanical and process tolerances in your final assembly
- Adjustable rising or falling output slope with programmable offset, gain, temperature compensation, and clamping voltage
- Return spring provides resistance to CCW motion
- Provided with EMI/ESD protection
- Fully encapsulated electronics to IEC 529 IP67
- ILAPS[™] technology can be custom packaged to meet your exact requirements (minimum quantities apply)

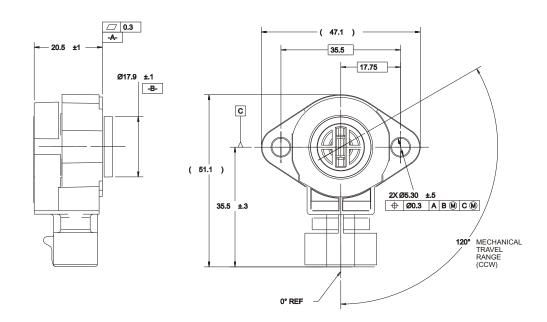

AN101101



INTRINSICALLY LINEAR ANGULAR POSITION SENSOR

MECHANICAL SPECIFICATIONS:

| MECHANICAL TRAVEL | 120° CCW maximum rotational sensing range |
|---------------------|--|
| ROTATION TORQUE: | 0.12N-m max with return spring |
| MASS: | 12 grams |
| LIFE: | +10 million full cycles |
| DITHER: (2° TRAVEL) | +80 million cycles |
| MATING CONNECTION | Connector: Packard metri-pack 150 12162185 |
| | Terminal: 12124075 |

ELECTRICAL SPECIFICATIONS:


| EFFECTIVE ROTATIONAL SENSING RANGE: | 0° to 100° functional output (with no overtravel) |
|---|---|
| INPUT VOLTAGE: | 5.0V ± 10% |
| INPUT CURRENT: | 10mA, max. at 5 VDC |
| INPUT CURRENT, OUTPUT(S) SHORTED TO GROUND: | 25mA, max, per output |
| MAX OVERVOLTAGE: | 24V DC |
| SENSOR OUTPUT @ 5VDC: (RATIOMETRIC | 0.5V TO 4.5V max. Programmable within 5% to 95% |
| TO INPUT VOLTAGE) | of the nominal voltage with positive or negative slopes |
| OUTPUT LINEARITY @ 5VDC: (ANALOG OUTPUT) | ±2.0% |
| RESOLUTION: | Analog |
| RESPONSE TIME: | .23mSEC |
| BULK CURRENT INJECTION | SAE J1113-4, 250kHz TO 500MHz,, 60mA/m |
| CONDUCTION AND COUPLING | SAE J1113-12, ±200V |
| ELECTRONIC DISCHARGE | SAE J1113-13, ±15kV |
| RADIATED IMMUNITY | SAE J1113-21, 10kHz TO 18GHz, 100V/m |
| IMMUNITY TO MAGNETIC FIELDS | SAE J1113-22, 600uT AC Field, 5Hz to 2kHz, |
| | .2mT & 1mT DC Field |
| IMMUNITY TO AC FIELDS | SAE J1113-25, 15,000V/m |
| RADIATED EMISSIONS | SAE J1113-41, Class 4 |

ENVIRONMENTAL SPECIFICATIONS:

| VIBRATION: | 10 G's peak, 20 Hz TO 1000 Hz |
|------------------------|---|
| SHOCK: | 20 G's, half sine pulse, 13 ms duration |
| OPERATING TEMPERATURE: | -40° C to +85° C (-40° C to +125° C optional) |
| STORAGE TEMPERATURE: | -55° C to +150° C |

Specifications subject to change without notice.

AN101101 120 degree Sensor Output

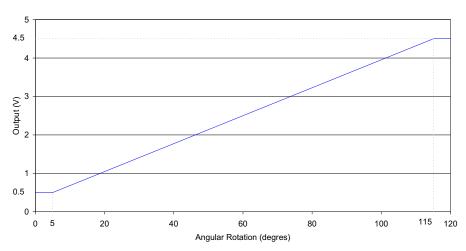

Contact

Call, fax or visit our website for more information.

Cherry Electrical Products

11200 88th Avenue Pleasant Prairie, WI 53158

Phone: 262 942 6500 Fax: 262 942 6566 Web: www.cherrycorp.com

© Cherry Corporation 2/2007