


PRODUCT NO.	STAND OFF HEIGHT DIM "L"
74375-001/001LF	0.0
74375-021/021LF	2.0
74375-022/022LF	2.2
74375-041/041LF	4.0
74375-043/043LF	4.3
74375-051/051LF	5.0

NOTES:

- MATERIAL:
GUIDE: POLYPHTHARAMIDE UL94V-0 (COLOR: BLACK)
PLATE: STAINLESS STEEL
EMI CONTACT: PHOSPHOR BRONZE
- FINISH:
EMI CONTACT: CONTACT AREA: 0.5 μ m Au
UNDER PLATING: 2.0 μ m Ni
- THE PART NUMBER WITH "LF" SUFFIX IS LEAD FREE P/N.
- IF LF P/N, PACKAGING MEETS GS-14-920 SPECIFICATION.
- FOR LEAD FREE P/N THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- FOR LEAD FREE P/N THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRO-RED OR VAPOR OPHASE REFLOW PROCESS.

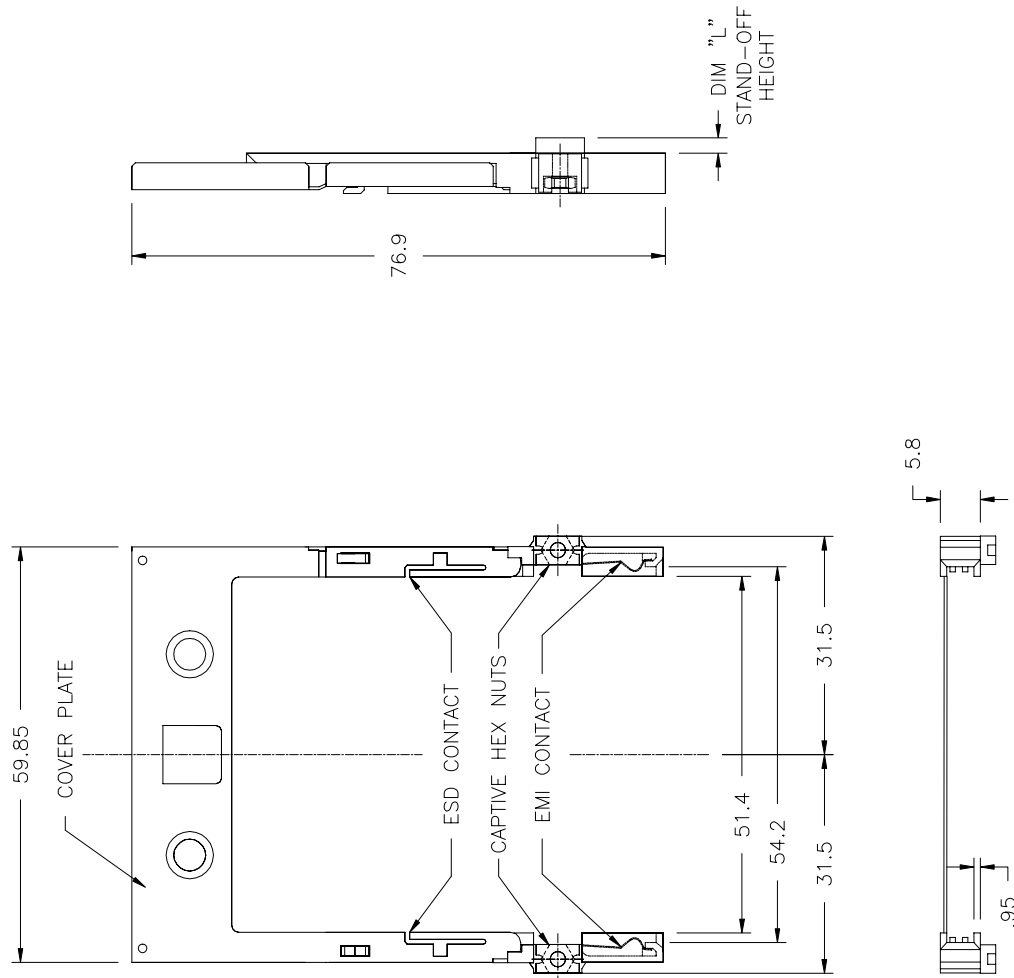

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		FGJ	
ltr	ecn no	dr	date							title	code
A	V71609	RHG	12/5/97	linear				X ±.3	NON-EJECT	NON-EJECT	MCS
B	V90147	CGC	2/2/99					.XX ±.13	MECHANISM ASSEMBLY		
C	N07-0041	DT	2/2/07	angles	0° ±2°			.XXX ±.051		product family	size
				dr	R.GRAPE	12/5/97		0° ±2°		dwg no	code
				enrg	D.BRANN	12/5/97					
				chr	D.BRANN	12/5/97					sheet
				appd	D.BRANN	12/5/97					1 of 1
sheet index	revision								1/1	scale	A4
	sheet										
											cage code
											22526