
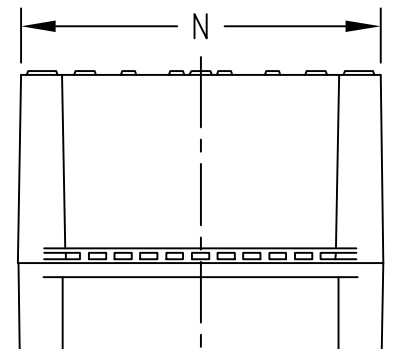


<b>PART NAME</b>	NON-METALLIC ENCLOSURE (STYLE D)	<b>PART No.</b>	NBD-10445 & NBD-10465 & NBD-15445
------------------	----------------------------------	-----------------	-----------------------------------

<p><b>MATERIAL:</b></p> <p><u>INDOOR VERSION</u>          SOLID BODY &amp; COVER _____ ABS/PC BLENDED PLASTIC          UL94-5VB FLAMMABILITY RATING</p> <p>CLEAR COVER _____ POLYCARBONATE PLASTIC          UL94V-0 FLAMMABILITY RATING          UV STABILIZED</p> <p><u>OUTDOOR VERSION</u>          SOLID BODY &amp; COVER _____ PBT/PC BLENDED PLASTIC          UL94-5VA FLAMMABILITY RATING          UV STABILIZED</p>		<p><b>FINISH:</b>          BODY _____ LIGHT GRAY          COVER _____ LIGHT GRAY OR CLEAR</p> <p>COVER INCLUDES GRAY POLY-URETHANE GASKET.</p> <p>AIR AND MOISTURE VENTS, STAINLESS STEEL LOCKING HASP, PANEL MOUNTING RAILS, GALVANIZED STEEL INNER PANEL AND STAINLESS STEEL WALL MOUNTING BRACKETS ARE NOT INCLUDED, BUT CAN BE PURCHASED SEPARATELY.</p>	<p><b>INDUSTRY STANDARDS:</b></p> <p><u>INDOOR VERSION</u>          UL508 TYPE 1, 2, 4, 4X INDOOR, 12 &amp; 13          NEMA TYPE 1, 2, 4, 4X, 12 &amp; 13          IEC529-IP65</p> <p><u>OUTDOOR VERSION</u>          UL508 TYPE 1, 2, 4, 4X, 12 &amp; 13          NEMA TYPE 1, 2, 4, 4X, 12 &amp; 13          IEC529-IP65</p>
--	---	--	---

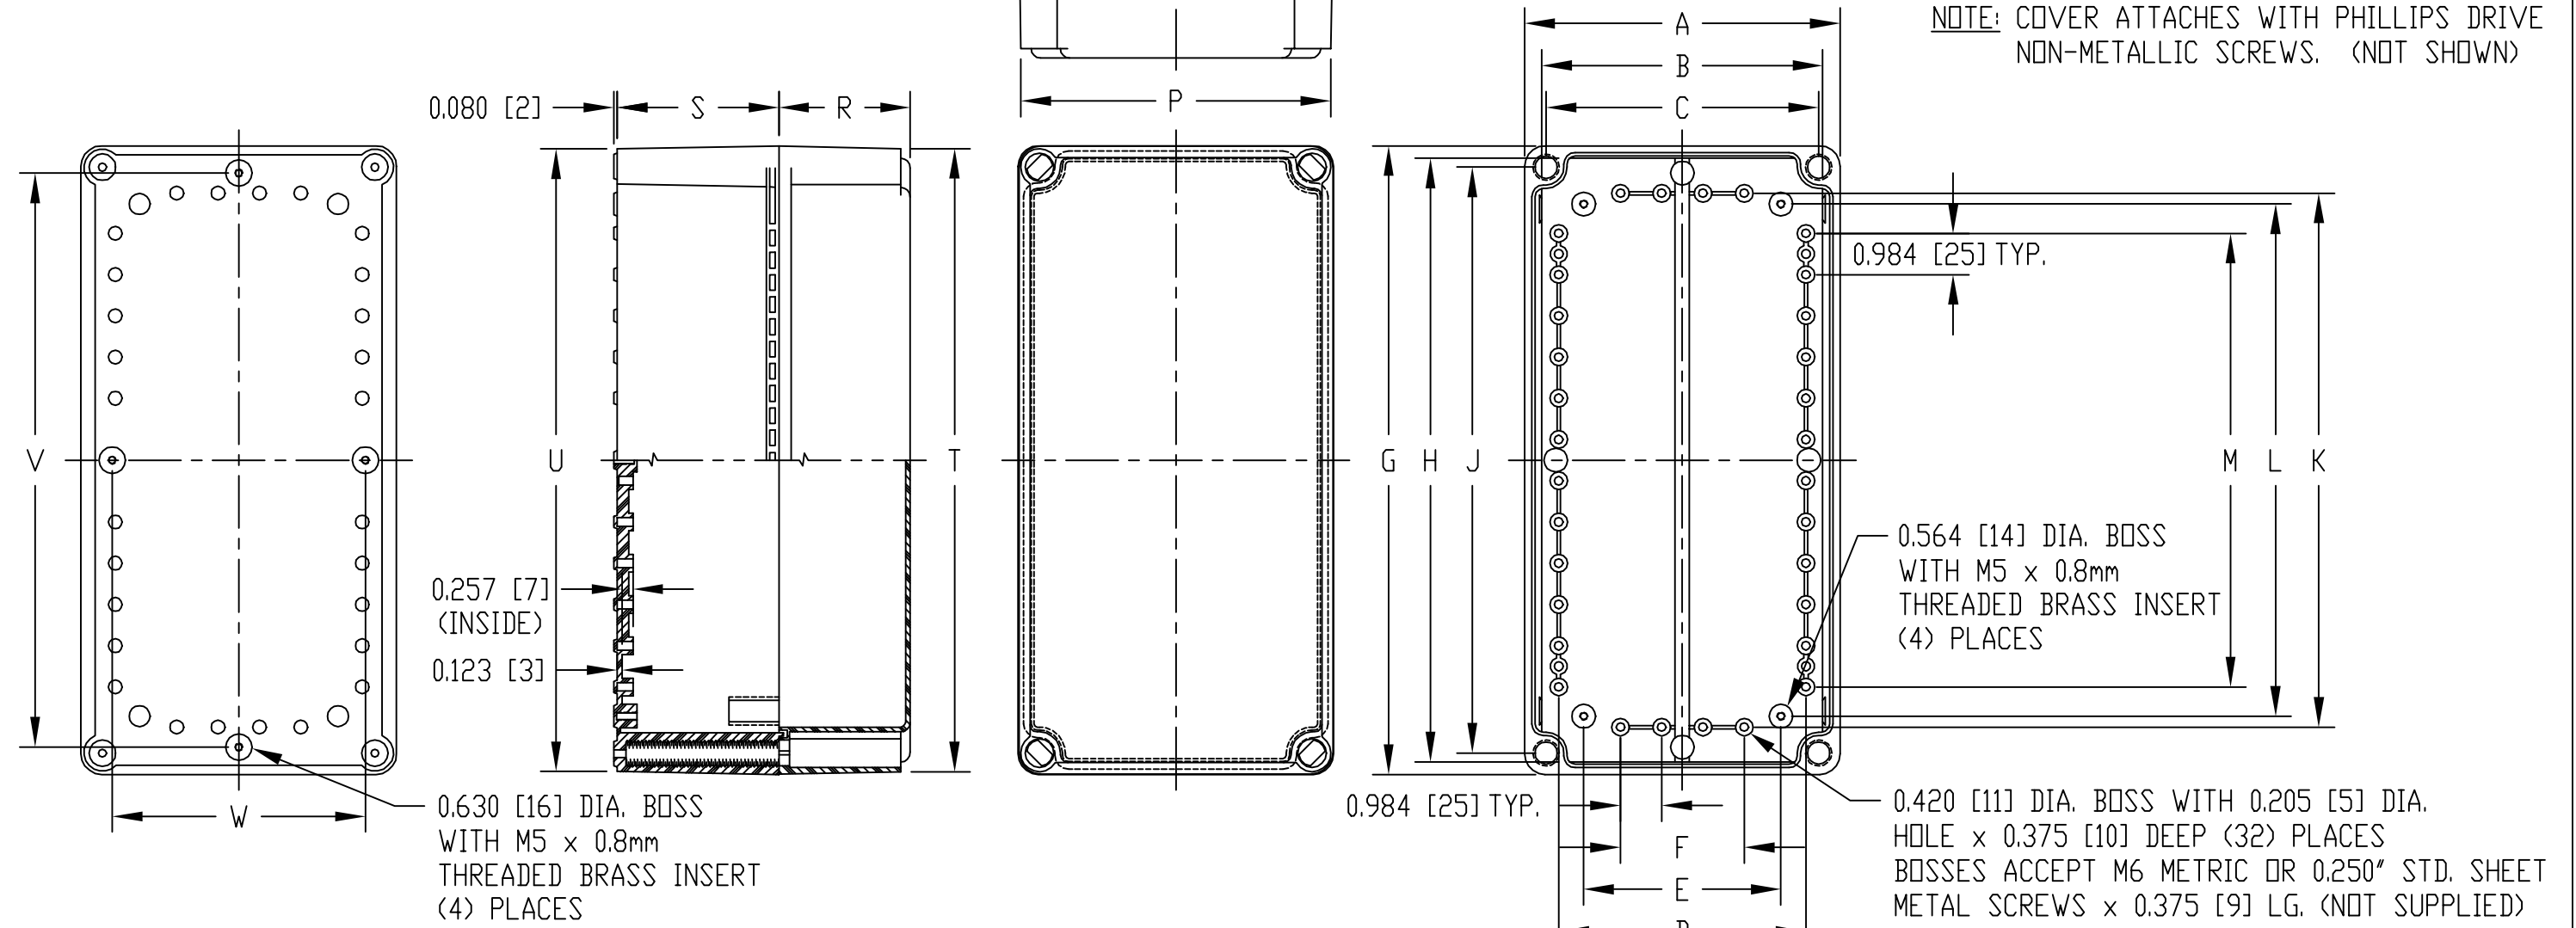

**NOTE:** ALL DIMENSIONS HAVE ±0.039 [±1] TOLERANCE UNLESS OTHERWISE SPECIFIED

DIMENSIONS = INCHES [MILLIMETERS]

INDOOR VERSION		OUTDOOR VERSION	DIMENSIONS																			
PART NO.		PART NO.																				
SOLID COVER	CLEAR COVER	SOLID COVER	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V	W
NBD-10445	NBD-10465	NBD-15445	7.530 [191]	6.700 [170]	6.500 [165]	5.900 [150]	4.705 [120]	2.952 [75]	15.000 [381]	14.405 [366]	13.980 [355]	12.790 [325]	12.222 [310]	10.824 [275]	7.385 [188]	7.400 [188]	3.137 [80]	3.860 [98]	14.870 [378]	14.865 [378]	13.700 [348]	6.039 [153]