

1564 Series **Sloped Console**





Top Console



Desk



Application

- Designed to provide an attractive, durable console enclosure system for control center installations and for the protection of electronic, hydraulic, pneumatic or electrical equipment.
- The 20° viewing slope provides the optimum angle for a control or instrument panel.
- Integral CRT mounting angles and optional desk panel provide versatility for many applications.
- Can be ganged together for large system applications.

Standards

EIA RS-310-D

Construction

- Available in Rapid Rack (2 sizes) or as a customized assembly which can be created using the various components in the 1564 Series.
- As a system rack, all components have been designed for a clean, modular interface.
- Major components are constructed of 14 gauge steel.
- Available with either 19" or 24" mounting capability.

Assemblies

 When assembling rack systems, please refer to master selection table for sizing information. k32

Finish

 Rapid Rack is available in beige (CG1). Components are available in beige (CG1) or black (BK1).

Accessories

- Blowers L15
- Casters K33
- Doors K31 K32
- Fan trays [122]
- Filter fans (120
- Side panels (K31)
- Top consoles k34
- Top panels K34
- Wedges K32
- 19"/24" rack mount accessories

K42 - K48

K29


1564 Series Sloped Console Rapid Rack




Rapid Rack

- For immediate delivery requirements, the Rapid Rack package can solve many sloped console needs. The package is finished with beige (CG1) frame and body.
- Package includes the following components and hardware:
 - 1 1564 frame with integral CRT mounting angles
 - 1 pair of side panels
 - 1 louvered rear door
 - 1 solid top panel
 - 4 upper black, punched combination rails
 - 4 lower black, punched combination rails
 - 4 adjustable levelling feet
 - 50 10-32 clip nuts


	PANEL						
Part No.	W IDTH	Α	В	С	D	E	F
RS4924CG1	19	22.56	24.5	19.06	14	17.5	21.31
RS4931CG1	19	22 56	31.5	19.06	21	24 5	19 56



Front View



Rear View

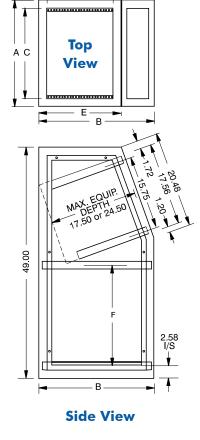

All dimensions in inches unless specified otherwise

FREESTANDING CABINETS


A

1564 Series Sloped Console

Components




Frame





- Designed to accommodate standard 19" or 24" rack mountable equipment on two different panel surfaces.
- Integral CRT mounting angles are a standard feature.
- Frame comes complete with 4 upper black, punched combination rails, 4 lower black, punched combination rails, 4 adjustable levelling feet and clip nuts.
- Available in beige (CG1) or black (BK1).

Part No.	Panel Width	Α	В	С	D	E	F
1564A21	19	22.56	24.5	19.06	14	17.5	21.31
1564B2	19	22.56	31.5	19.06	21	24.5	19.56
1564A4	24	27.56	24.5	24.06	14	17.5	21.31
1564B4	24	27.56	31.5	24.06	21	24.5	19.56

A C





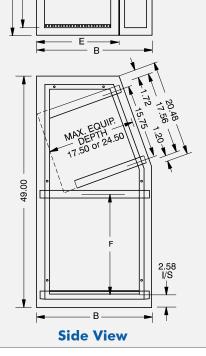

Top

View

All dimensions in inches unless specified otherwise

¹ Specify 3 digit color code. Beige (CG1) or Black (BK1).

1564 Series Sloped Console **Components**







Side Panels

- Sold in pairs.
- Constructed of 16 gauge steel formed to 0.75" thick which hook over Amhal struts and can be secured from the inside.
- Panels fit flush with frame.
- Available in beige (CG1) or black (BK1).

Part No.	Use With Frame Part No.
1564AP ¹ 1564BP	1564A2/1564A4 1564B2/1564B4
1304BF	1304B2/1304B4





Top Panel

- Solid 16 gauge steel panel mounts flush with frame.
- Louvered 16 gauge steel panel is recessed.
- Any 19" (or 24" as applicable) panel of proper depth will fit opening.
- Available in beige (CG1) or black (BK1).
- Mounting hardware not included, please order separately.

SOLID TOP PART NO.	Louvered Top Part No.	Use with Frame Part No.
PBRS190141	PVLK190141	1564A2
PBRS19021	PVLK19021	1564B2
PBRS24014	PVLK24014	1564A4
PBRS24021	PVLK24021	1564B4

¹ Specify 3 digit color code. Beige (CG1) or Black (BK1).



Rear Door

- Features lockable latch.
- Fills rear panel space and sits flush with frame.
- Solid door opens either left or right by inverting.
- Louvered door opens right hand only with louver vents facing
- Constructed of 18 gauge steel.
- Available in beige (CG1) or black (BK1).

SOLID DOOR PART NO.	LOUVERED DOOR PART NO.	Use with Frame Part No.
RSDF190421	RSDL190421	1564A2
RSDF19042	RSDL19042	1564B2
RSDF24042	RSDL24042	1564A4
RSDF24042	RSDL24042	1564B4

¹ Specify 3 digit color code. Beige (CG1) or Black (BK1).

K31

All dimensions in inches unless specified otherwise



1564 Series Sloped Console

Components



Front Doors

- Features lockable latch.
- Fills front lower panel space and sits flush with frame.
- For optional desk units, use RSDF19022 or RSDF24022.
- Solid door opens either left or right by inverting.
- Louvered door opens right hand only with louver vents facing down.
- Available in beige (CG1) or black (BK1).

SOLID DOOR	Louvered Door	Use w/Frame
PART NO.	Part No.	Part No.
RSDF19022 ¹	n/a	1564A2 or 1564B2
RSDF24022	n/a	1564A4 or 1564B4
RSDF19026	RSDL19026 1	1564A2
RSDF19026	RSDL19026	1564B2
RSDF24026	RSDL24026	1564A4
RSDF24026	RSDL24026	1564B4

¹ Specify 3 digit color code. Beige (CG1) or Black (BK1).



Wedges

- For wrap-around applications, 2 wedge sizes provide either 30° or 60° angles.
- Constructed of 14 gauge steel and comes complete with solid rear 16 gauge panel.
- Available in beige (CG1) or black (BK1).

Part No.	Use with Frame Part No.	Wedge Angle
1564AW30 ¹	1564A2/1564A4	30
1564BW30	1564B2/1564B4	30
1564AW60	1564A2/1564A4	60
1564BW60	1564B2/1564B4	60

¹ Specify 3 digit color code. Beige (CG1) or Black (BK1).

1564 Master Selection Table

PANEL	CABINET		ONT H EIGHT		OPE HEIGHT		SIDE Panels	Wed	GE	Тор Р	ANEL
W IDTH	D EPTH	Inches	Units	Inches	Units	FRAME	(Pair)	30°	60°	Solid	Louvered
19"	24.5	26.25	15	17.5	10	1564A2 ¹	1564AP1	1564AW30 ¹	1564AW60 ¹	PBRS190141	PVLK190141
	31.5	26.25	15	17.5	10	1564B2	1564BP	1564BW30	1564BW60	PBRS19021	PVLK19021
24"	24.5	26.25	15	17.5	10	1564A4	1564AP	1564AW30	1564AW60	PBRS24014	PVLK24014
	31.5	26.25	15	17.5	10	1564B4	1564BP	1564BW30	1564BW60	PBRS24021	PVLK24021

¹ Specify 3 digit color code. Beige (CG1) or Black (BK1).

All dimensions in inches unless specified otherwise

1564 Series Sloped Console **Components**




Photo shows combination rails

Extra Mounting Rails


- Rails are sold in pairs.
- Available as punched combination (same as supplied with 1564 rack), panel and accessory rails.
- All rails have full EIA panel mounting (0.28" dia.) for $\frac{1}{4}$ -20 bolts or 10-32 clip nuts.
- Each rail is adjustable in a 1.0" x 0.281" slot.
- Constructed of 14 gauge and finished in black.
- Clip nuts are provided with rails.


Part No.	Panel Height Inches	
RSR _ 00017BK3	17.50	10
RSR _ 00026BK3	26.25	15


"_" - Specify rail type in blank space. (C) Combination, (A) Accessory, (P) Panel













Casters

- Casters supplied in a set of 4.
- Features a manufacturer's specified capacity of 400 lbs. per set.
- Constructed of twin nylon swivel wheels with zinc axles and hoods.
- Wheel has a 2.37" diameter with a final mounting height of 2.75".
- 5/16-18 threaded stem mounts into existing holes in base.

PART No.	1425P

	D	OOR			Тор С	ONSOLE	
REAR		REAR FRONT			Flush Solid	SIDE	TILT
Solid	Louvered	Solid	Louvered	FRAME	TOP PANEL	PANELS (PAIR)	Base
RSDF190421	RSDL190421	RSDF190261	RSDL190261	1564TC19171	PBRS190141	1564TCP171	564CB19171
RSDF19042	RSDL19042	RSDF19026	RSDL19026	1564TC1924	PBRS19021	1564TCP24	1564CB1924
RSDF24042	RSDL24042	RSDF24026	RSDL24026	1564TC2417	PBRS24014	1564TCP17	1564CB2417
RSDF24042	RSDL24042	RSDF24026	RSDL24026	1564TC2424	PBRS24021	1564TCP24	1564CB2424

All dimensions in inches unless specified otherwise

K33