


1830 ±⁺⁷⁶₋₂₅ (6FT ±⁺³₋₁IN)

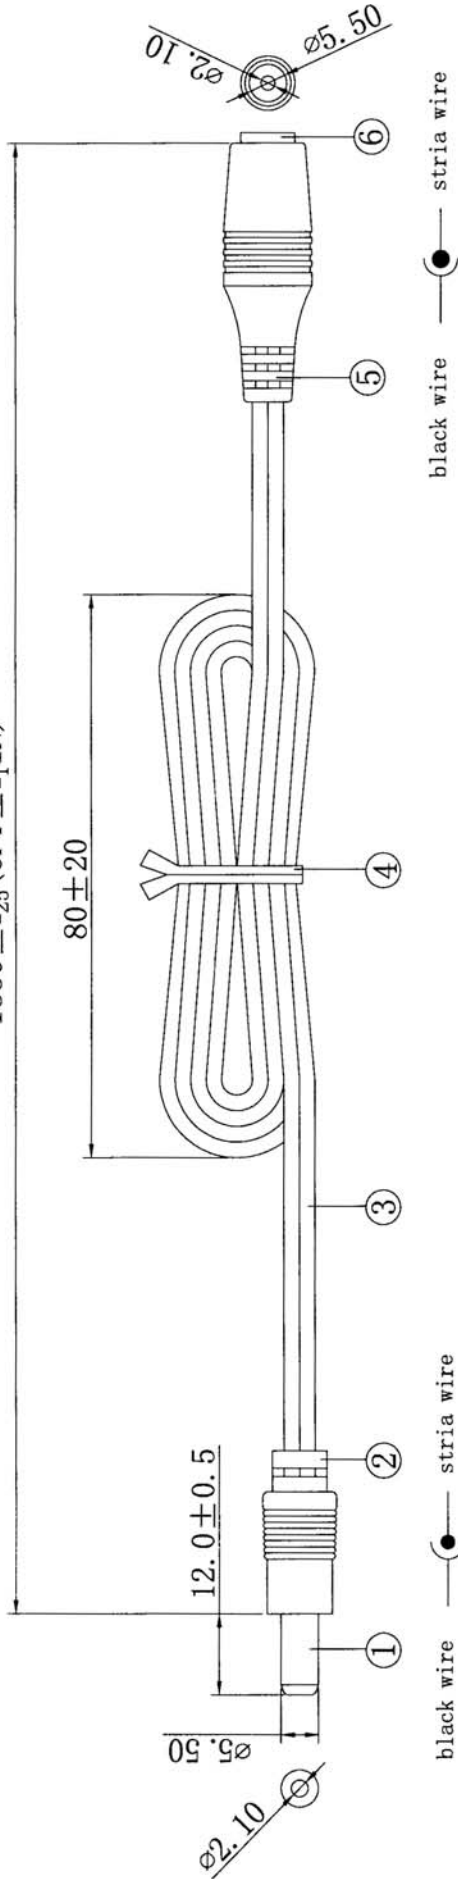


No.	DESCRIPTION	SPECIFICATION	UNIT	Q' TY
1	PLUG	ø2.10x5.50x22±0.5mm black color hardware Ni-plate.	EA	1
2	PLUG HOLDER	used 30P black color PVC. M160	EA	1
3	CABLE	UL2468 AWG#18 0.16 x 41 rootlets x 2C, black color twin wire, O. D. 2.2 by 4.4 ±0.1mm.	MM	1840 ⁺²⁰ ₀
4	BAND WIRE	black enfold gluey wire.	MM	89 ±3
5	SOCKET	Used 30P black color PVC.	EA	1
6	PLUG HOLDER	ø2.10x5.50 socket Ni-plate	EA	1

FUNCTION TEST: No open, no reversed polarity, no short-circuit, no INT

HI-POT TEST: 600VAC, 0.5mA, 1Second.

CABLE ASSEMBLY SHALL BE IN COMPLIANCE WITH RoHS REQUIREMENT.



UNITS	mm
Tolerance:	
X	= ± 0.5
.X	= ± 0.25
.XX	= ± 0.05
07-06-2006	

Description:
Extension Cable, 5.5mm x 2.1mm DC
Jack to P5 Plug, 6ft, 18AWG Zip Cord

Part Number:
CA-2210

