


915 ± 50 (3FT ± 2IN)

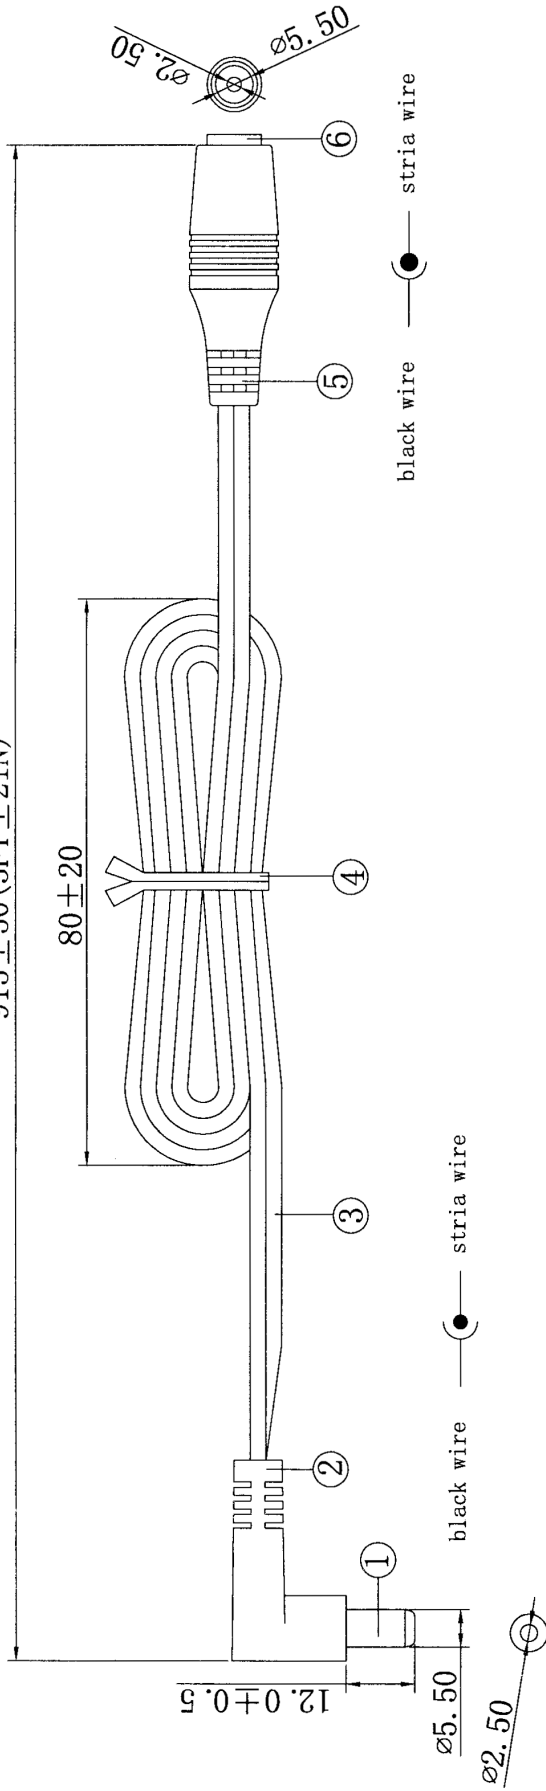

No.	DESCRIPTION	SPECIFICATION	UNIT	Q' TY
1	PLUG	ø2.50x5.50x22 ± 0.5mm black color hardware Ni-plate.	EA	1
2	PLUG HOLDER	used 30P black color PVC.	EA	1
3	CABLE	UL2468 AWG#18 0.16 x 41 rootlets x 2C, black color twin wire, 0.2.2 by 4.4 ± 0.1mm.	MM	920 ⁺¹⁰ ₋₀
4	BAND WIRE	black enfold gluey wire.	MM	89 ± 3
5	SOCKET	Used 30P black color PVC.	EA	1
6	PLUG HOLDER	ø2.50x5.50 socket Ni-plate	EA	1

FUNCTION TEST: No open, no reversed polarity, no short-circuit, no INT

HI-POT TEST: 600VAC, 0.5mA, 1Second.
CABLE ASSEMBLY SHALL BE IN COMPLIANCE WITH RoHS REQUIREMENT.

	UNITS: mm
	Tolerance:
	X = ± 0.5
	.X = ± 0.25
	.XX = ± 0.05
	07-06-2006

Description:
Extension Cable, 5.5mm x 2.5mm DC
Jack to R/A P6 Plug, 3ft, 24AWG Zip Cord

Part Number:

CA-2218

