

REVISIONS ARE

DO NOT SCALE FROM THIS PRINT

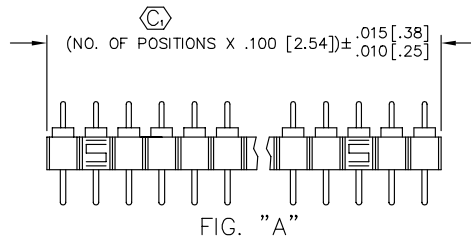



TABLE 1

TERMINAL STYLE	TERMINAL/BODY SPECIFICATION				FIG.	SHEET
	TS: SINGLE	TS BODY	TD: DOUBLE	TD BODY		
-AA	T-1R5-X	SEE NOTE 7	T-1R5-X	SEE NOTE 6	1	2
-A	T-1R0-X	SEE NOTE 7	T-1R0-X	SEE NOTE 6	2	2
-A-1	T-1R7-1-X	SEE NOTE 7	T-1R7-1-X	SEE NOTE 6	3	2
-A-2	T-1R7-2-X	SEE NOTE 7	T-1R7-2-X	SEE NOTE 6	4	2
-B	T-1R1-X	SEE NOTE 10	T-1R1-X	SEE NOTE 6	5	2
-B-1	T-1R8-1-X	SEE NOTE 7	T-1R8-1-X	SEE NOTE 6	6	2
-B-2	T-1R8-2-X	SEE NOTE 7	T-1R8-2-X	SEE NOTE 6	7	2
-C	T-1R2-X	SEE NOTE 7	T-1R2-X	SEE NOTE 6	8	2
-C-1	T-1R9-1-X	SEE NOTE 7	T-1R9-1-X	SEE NOTE 6	9	2
-C-2	T-1R9-2-X	SEE NOTE 7	T-1R9-2-X	SEE NOTE 6	10	2
-D-1-1	T-1S4-1-1-X	SEE NOTE 7	T-1S4-1-1-X	SEE NOTE 6	11	3
-D-1-2	T-1S4-1-2-X	SEE NOTE 7	T-1S4-1-2-X	SEE NOTE 6	12	3
-D-2-1	T-1S4-2-1-X	SEE NOTE 7	N/A		13	3
-D-2-2	T-1S4-2-1-X	SEE NOTE 7	N/A		14	3
-D-3-2	T-1S4-3-1-X	SEE NOTE 7	N/A		15	3
-D-4-2	T-1S4-4-1-X	SEE NOTE 7	N/A		16	3
-E	T-1R12-X	SEE NOTE 7	N/A		17	3
-F	T-1S5-X	SEE NOTE 7	T-1S5-X	SEE NOTE 6	18	3
-G-1	T-1R5-1-X	SEE NOTE 7	T-1R5-1-X	SEE NOTE 6	19	3
-J	S-1P1-X	SEE NOTE 8	S-1P1-X	DSB-36	21	4
-K	T-1R12-X	SEE NOTE 7	T-1R12-X	SEE NOTE 6	22	4
-L-1	S-1W1-1-X	SEE NOTE 8	S-1W1-1-X	DSB-36	23	4
-L-2	S-1W1-2-X	SEE NOTE 8	S-1W1-2-X	DSB-36	24	4
-L-3	S-1W1-3-X	SEE NOTE 8	S-1W1-3-X	DSB-36	25	4
-M	T-1S2-X	SEE NOTE 8	T-1S2-X	DSB-36	26	4
-N	T-1R5-1-X	SEE NOTE 7	N/A		27	4
-Q-3 *	S-1W1-3-X	SEE NOTE 7	N/A		29	4

N/A = NOT AVAILABLE \* STYLE -Q-3 AVAILABLE ONLY AS A COMPONENT OF CSP/25 CABLE ASSEMBLIES.

**PROPRIETARY NOTE**  
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED		TOLERANCES ARE:		TITLE:	DWG NO.:
ONE PLACE DECIMALS ±	THREE PLACE DECIMALS ±	FOUR PLACE DECIMALS ±	ANGLES ± 2°			TERMINAL STRIP ASSEMBLY	TX-1XX-X-X
TWO PLACE DECIMALS ±							SHEET 1 OF 4

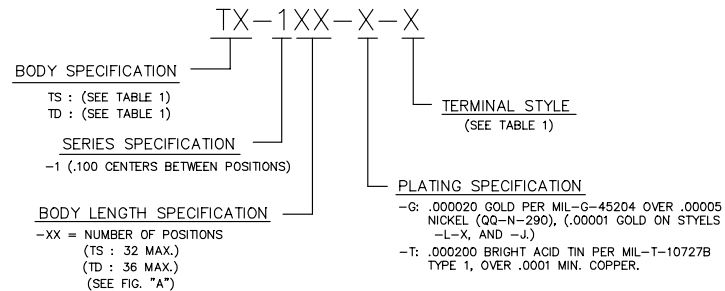

BODY SPEC.	LEAD STYLE	TUBE	PLUG
TS	A-1, A-2, A, AA, B, C, H, G-1, B-1	PT-1-24-01-24	TP-24
	J	PT-1-24-01-23	TP-12
	G-2, D-1-2, D-1-1	PT-1-24-02-03	TP-24
TD	A-1	PT-1-24-10-03	TP-03
	A-2	PT-1-24-05-17	TP-07
	A, AA	PT-1-24-02-46	TP-03
	J	PT-1-24-01-22	
		PT-1-24-01-14	

- NOTE:
- SEE COMPONENT PRINT FOR MAXIMUM ALLOWABLE BOW.
  - MINIMUM PUSHOUT FORCE = 5 LBS.
  - MAXIMUM ALLOWABLE TOE IN/OUT OF TERMINALS = ± 2°.
  - .005 [0.13] MAX. ALLOWABLE FLASH AFTER REMOVAL OF CROSS BARS.
  - ⊙ REPRESENTS A CRITICAL DIMENSION.
  - USE DSB-36 AND FILL WITH COUNTERBORE DOWN.
  - USE TBS-32 AND FILL WITH COUNTERBORE UP.
  - USE SSB-XX AND FILL WITH COUNTERBORE UP.
  - FOR LEAD STYLES PACKAGED IN TUBES: PACKAGE -05 THRU -36 POSITIONS IN TUBES; LAYER PACKAGE SMALLER POSITIONS.
  - USE SSB-XX AND FILL WITH COUNTERBORE DOWN.

MATERIAL:  
INSULATOR:  
GLASS FILLED POLYESTER  
COLOR: BLACK

TERMINAL:  
BRASS, EXCEPT STYLE G  
IS PHOSPHOR BRONZE

**samtec**

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150  
PHONE (812) 944-6733 P.O. BOX 1147  
CODE 55322

MADE BY: L.W. 12/05/84

TX-1XX-X-X  
SHEET 1 OF 4

PLOT SCALE: 1=1

EXISPROD\ASSEMBLY\100  
TX-MKT1