
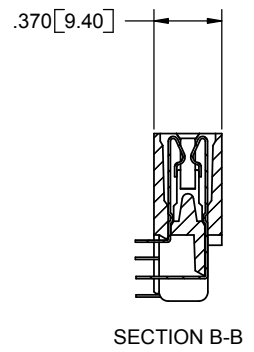
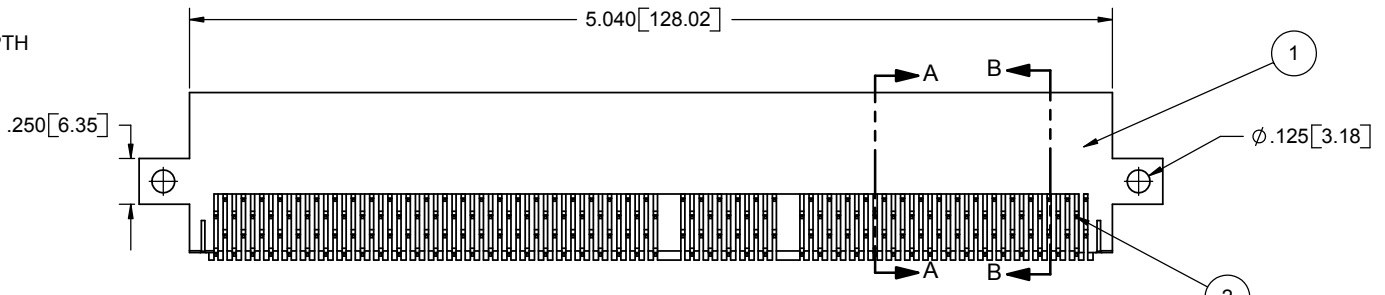



| ITEM NO. | QTY. | DESCRIPTION | DRAWING # REF |
|----------|------|-------------|---------------|
| 1 | 1 | B92CD-A351 | 10127 |
| 2 | 184 | EZB-DHM | 256 |

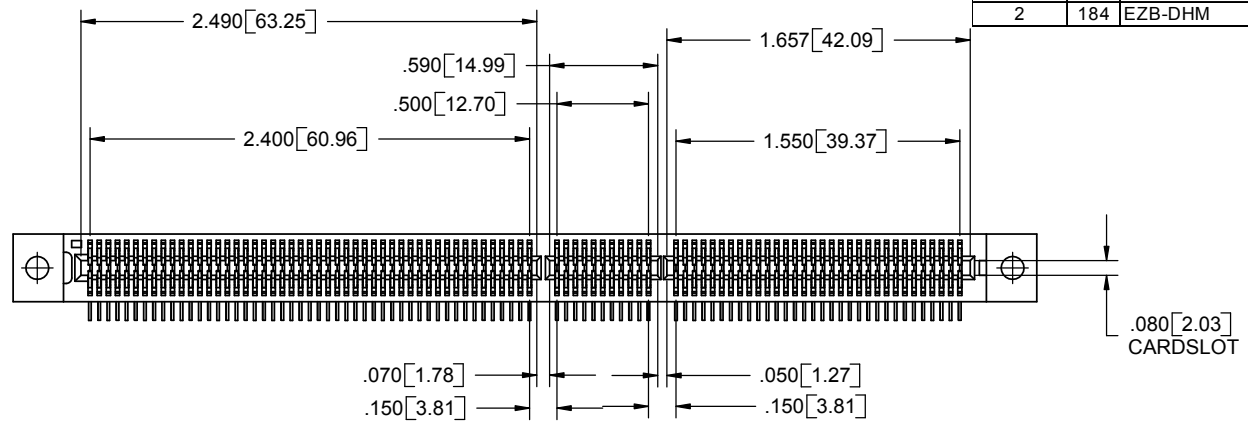

- NOTES:**
- THIS SPECIFICATION COVERS THE REQUIREMENT FOR A DUAL 92/184 ROW EDGECARD CONNECTOR
 - INSULATOR MATERIAL: POLYPHENYLENE SULFIDE. (BLACK)
 - CONTACT MATERIAL: PHOSPHOR BRONZE.
 - PLATING: .00001" GOLD ON CONTACT SURFACE
.00001" TIN/LEAD ON TERMINAL
.00005" NICKEL UNDERPLATE
 - TEMPERATURE: -65°C TO 125°C
 - UL FLAMMABILITY RATING: 94V-0
 - VOLTAGE RATING: 125 VDC MINIMUM AT SEA LEVEL.
 - CURRENT RATING: 1 AMP
 - VOLTAGE DROP: 30 MILLI VOLT AT RATED CURRENT
 - INSULATION RESISTANCE: 1000 MEGA OHM
 - CONNECTOR IDENTIFICATION: THE PART SHALL BE MARKED WITH A PART NUMBER AND DATE CODE.
 - BOARD THICKNESS ACCOMMODATED: .062 [1.57]
 - BOARD INSERTION FORCE: 6 OUNCE AVERAGE PER CONTACT PAIR USING .062 [1.57] PCB
 - BOARD WITHDRAWAL FORCE: 1 OUNCE MINIMUM PER CONTACT PAIR USING .062 [1.57] PCB
 - TOLERANCE: $\pm .010$ " UNLESS OTHERWISE NOTED.
 - MODIFICATION: MOLDED KEY BETWEEN POSITIONS 49 AND 52, 62 AND 65

COMPUTER GENERATED DOCUMENT DO NOT CHANGE MANUALLY

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING AND DESIGN IS THE PROPERTY OF SULLINS ELECTRONICS. IT MAY NOT BE USED FOR ANY PURPOSE OTHER THAN BY THE OWNER. SULLINS ELECTRONICS DOES NOT AUTHORIZE THE REPRODUCTION OR CONVEYANCE OF ANY INFORMATION CONTAINED HEREIN.

| REV. | ECO NO. | DESCRIPTION | DATE | BY | APP'VD |
|------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------------------------------|--------|
| A | 120 | ORIGINAL RELEASE | 01/09/04 | AN | AJT |
| | | UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: 1/32 ANGULAR: $\pm 1^\circ$ TWO PLACE DECIMAL: $\pm .02$ THREE PLACE DECIMAL: $\pm .005$ FOUR PLACE DECIMAL: $\pm .0005$ INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL: NOTED FINISH: N/A | | | |
| | | DRAWN: ARIA CHECKED: AJT | | | |
| | | SULLINS ELECTRONICS | | PART NO./DESCRIPTION: RZB92DHAS-S250 | |
| | | SIZE: C | DWG. NO.: 10126 | REV: A | |
| | | APPLICATION: DO NOT SCALE DRAWING | SCALE: 2:1 | SHEET 1 OF 1 | |