
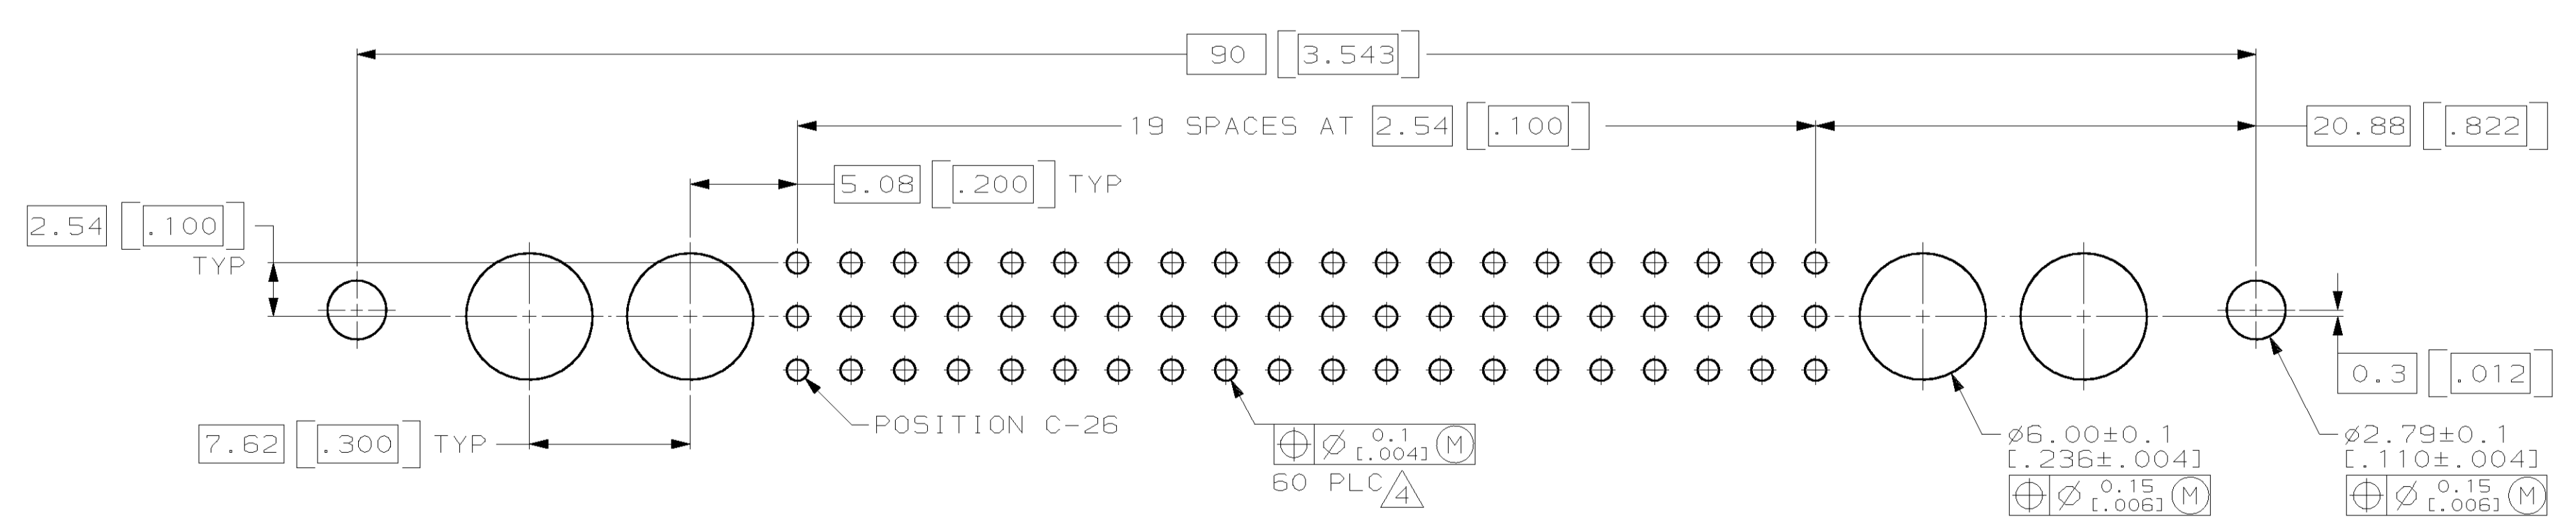
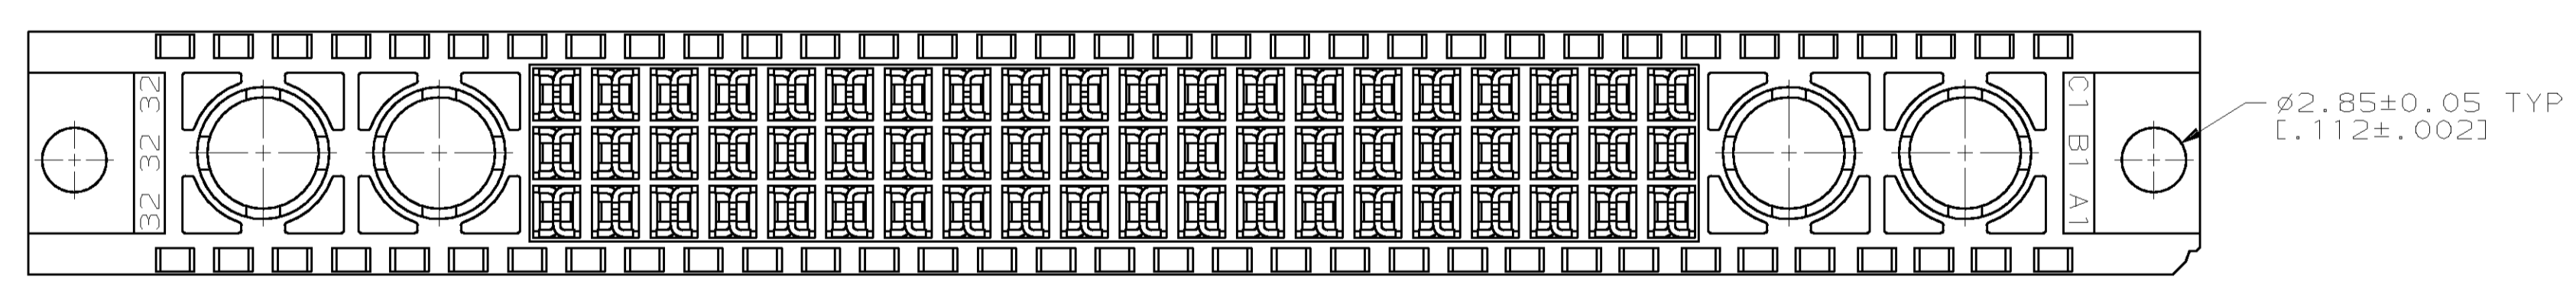
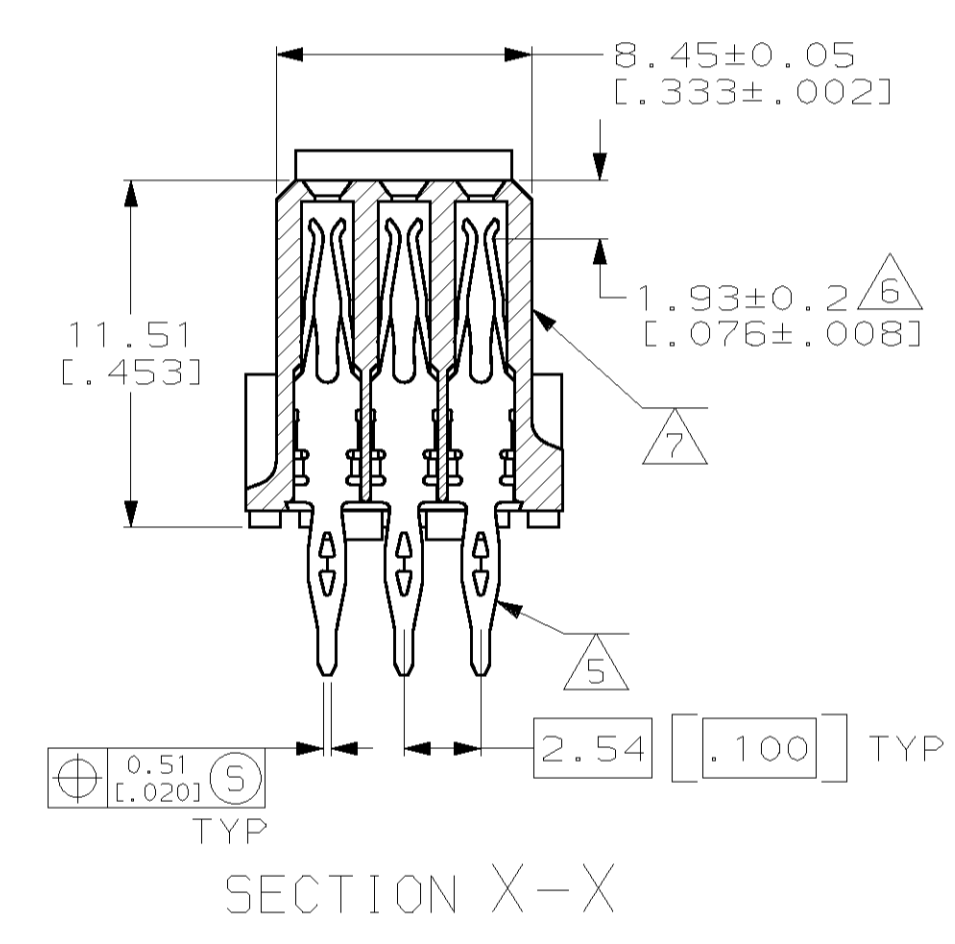
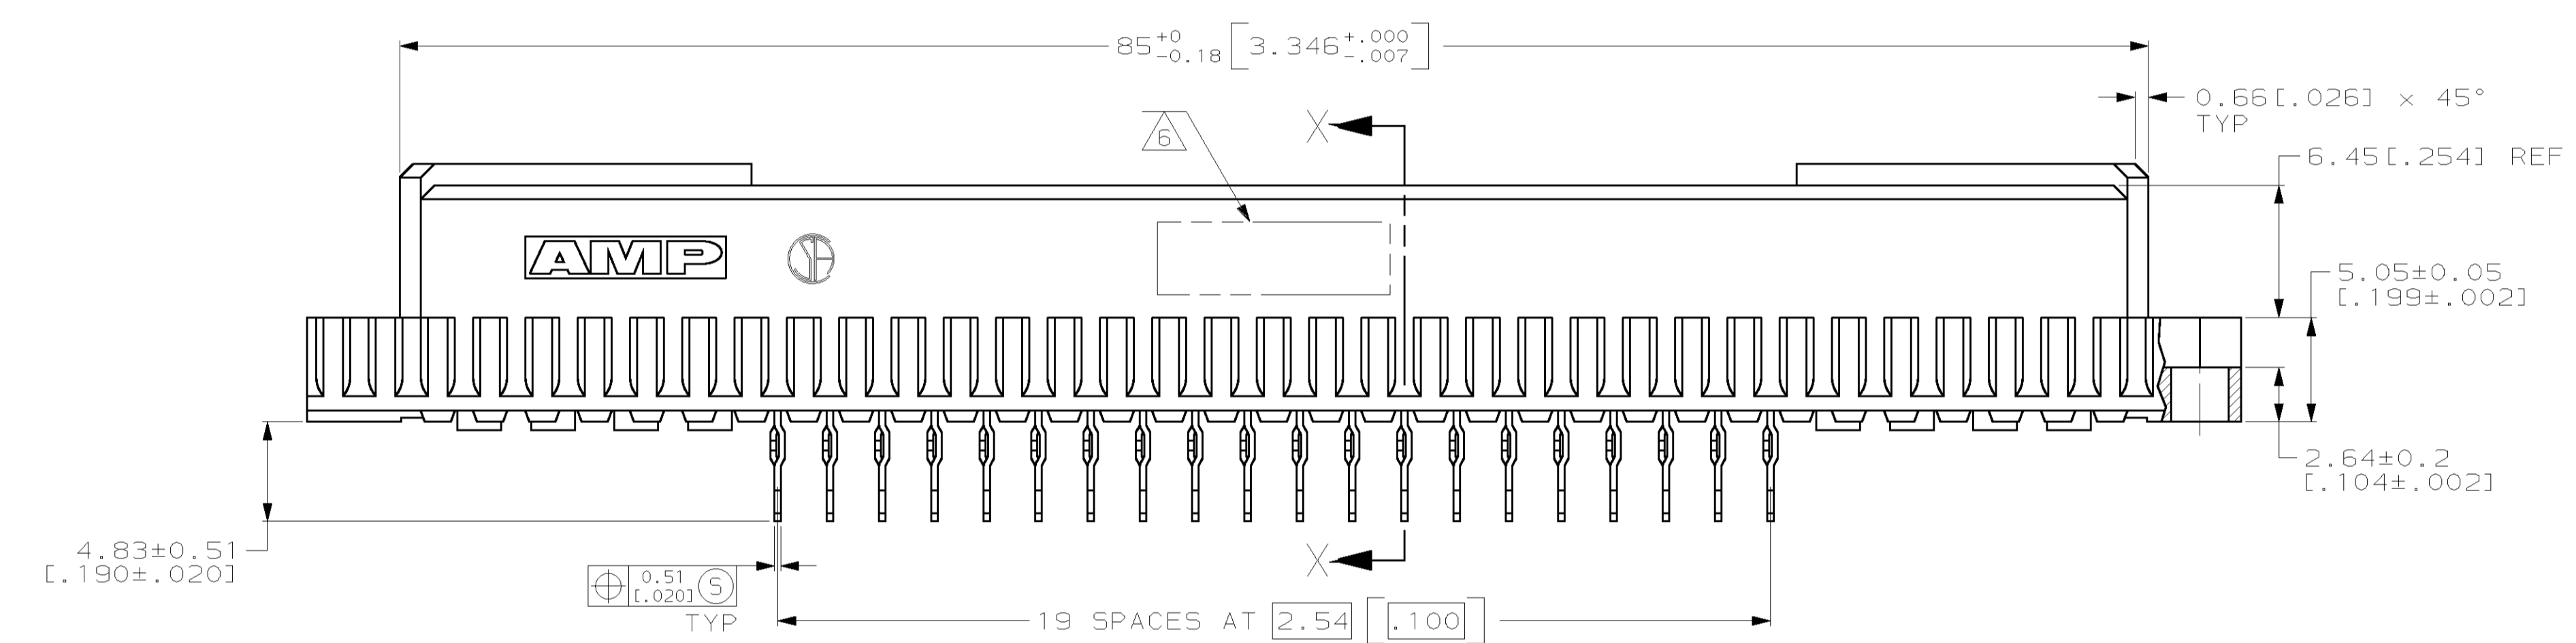


REVISONS		DATE	BY	APPV
0	DRAWN	-	-	-
A	REV PER EC 0621-80-99	06 APR 99	BC	CR
B	REV PER EC 001B-0367-00	04 JAN 01	BC	CR

- ① HOUSING MATERIAL: GLASS-FILLED POLYESTER. COLOR: GRAY.
- ② CONTACT MATERIAL: PHOSPHOR BRONZE.
- ③ PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO IN THIS APPROXIMATE AREA.
- ④ ACTION PIN POSTS REQUIRE 1.57[.062] MINIMUM THICK PC BOARD. RECOMMENDED PC BOARD DRILLED HOLES ARE  $\phi 1.151 \pm 0.025$ [.0453 $\pm$ .0010] WITH 0.02-0.08[.001-.003] COPPER AND 0.008[.0003] MINIMUM TIN-LEAD PLATING. FINISHED HOLES AFTER PLATING  $\phi 0.94-1.09$ [.037-.043].
- ⑤ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN-LEAD PLATE ON POSTS.
- ⑥ CONTACT POINT.
- ⑦ HOT STAMPING ON THIS SIDE.

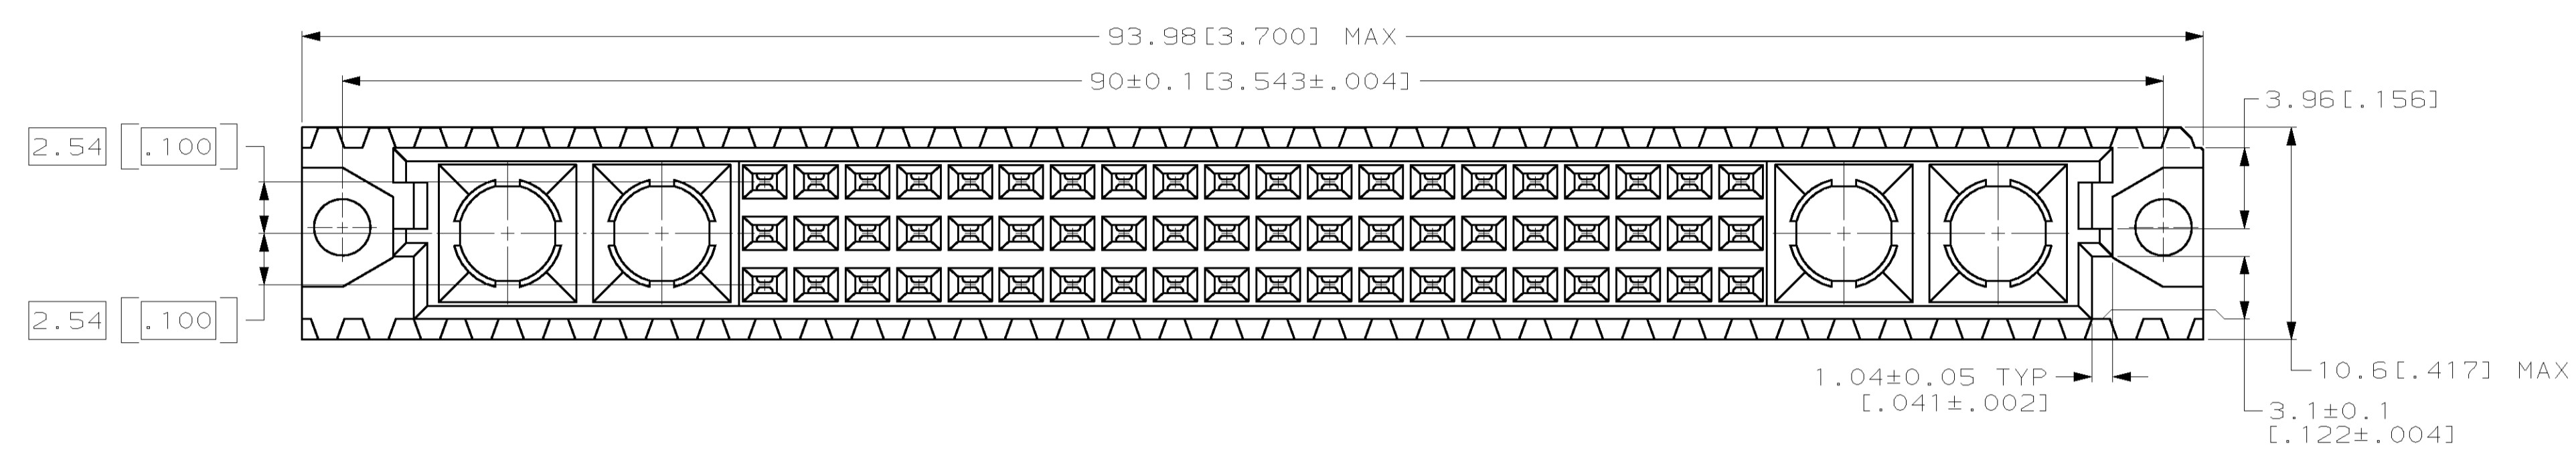

148420-5  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. BRINER 9/30/97	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm (INCHES)		CHK R. PATTERSON 9/30/97	NAME RECEPTACLE ASSEMBLY, EUROCARD, TYPE M, 60 + 4 POSITION	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPV R. PATTERSON 9/30/97	SIZE A1 00779 C-148420	
0 PLC $\pm$		PRODUCT SPEC	RESTRICTED TO	
1 PLC $\pm$		APPLICATION SPEC	SCALE 4:1 SHEET 1 OF 1 REV B	
2 PLC $\pm 0.13$ (.005)		WEIGHT	CUSTOMER DRAWING	
3 PLC $\pm$				
4 PLC $\pm$				
ANGLES				
MATERIAL				
HOUSING: ①				
POST: ②				