

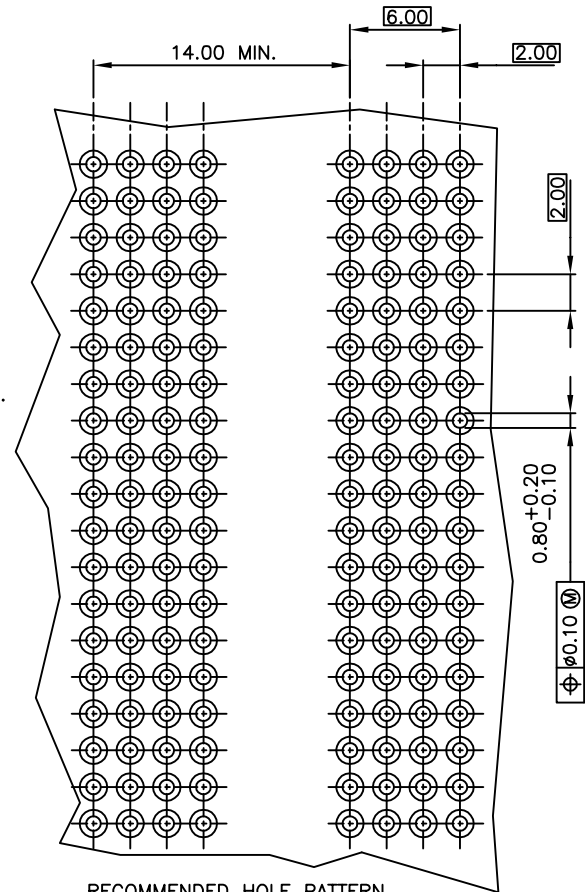
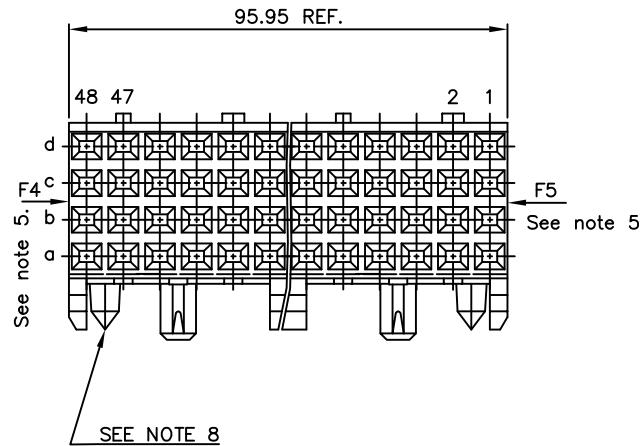


PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-9YY	TELCORDIA CO
-1YYLF	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-3YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO

PRODUCT NR.	DIM "A"
88957-X01	5.00 REF.
88957-X11	3.35 REF.
88957-X01LF	5.00 REF.
88957-X11LF	3.35 REF.

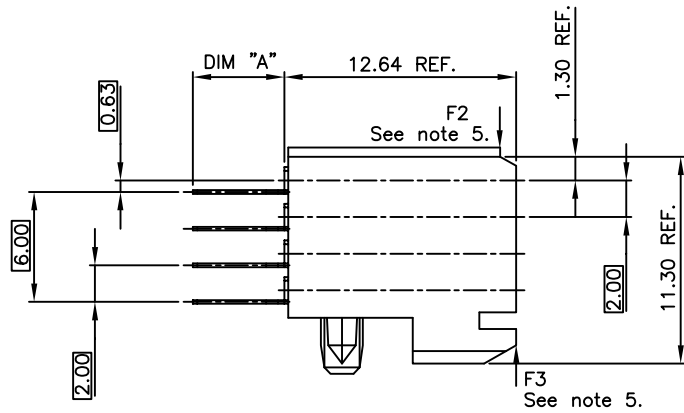

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

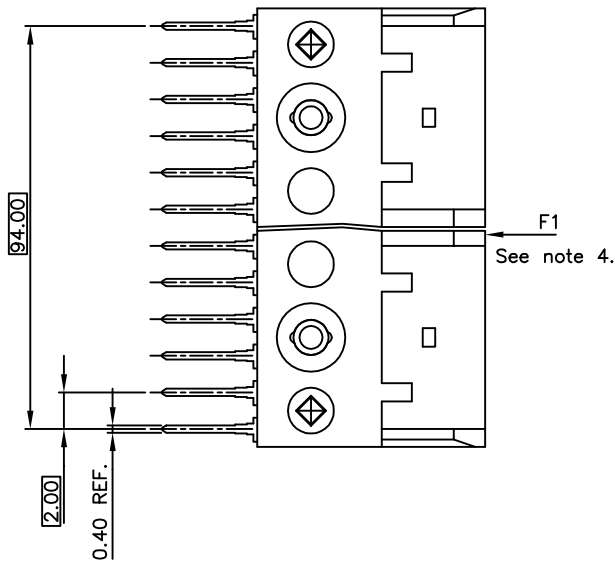

NOTES:

1. BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. PLATING SOLDER TAILS 2-8 μm SnPb 90-97 OR PURE Sn FOR LF.
4. LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON PER 12 MM CONNECTOR LENGTH.
5. LOAD IN THIS DIRECTION 100 NEWTON MAXIMUM PER CONNECTOR.
6. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD, THE USE OF A FIXTURE IS RECOMMENDED.
7. PRODUCT MARKING: PARTNUMBER & BATCH I.D.
8. DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
9. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
10. THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCG ELECTRONICS	
H	D007-0170	dr	05/22/07	Linear	projection	STR FEMALE STB SIGNAL 96MM	
J	D008-0171	TER	8/26/08		⊕	product family METRAL (tm) code	
				angles		size dwg no	
D	H30732	HBO	931119	dr	A van Zanten	910809	code
E	H40355	DOB	940527	engr	H.Bouwknegt	931122	213
F	V91450	DOB	990827	chr	P.Schalk	910809	sheet
G	0005-048	CLU	051115	app	van Woensel	911227	1 of 1
sheet	revision						
index	sheet						