


IEC appliance outlet F, snap-in mounting, front side, solder/quick connect terminal



Snap-In Version

**Description**

- Panel Mount:  
Snap-in version from front side
- Outlet, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

**Approvals**

- VDE License Number: 40017345
- UL License Number: E103791
- CSA License Number: 38456

**Other versions on request**

- Other panel thickness
- Types for rivet mounting available upon request
- Types for enhanced glow wire test requirements acc. IEC 60695-2-11 to -13 for the use in unattended household equipment acc. IEC 60335-1

**Weblinks**

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

**Technical Data**


Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Snap-in: 1/ 1.2/ 1.5/ 2/ 2.5/ 3 mm
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	F acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
-------------------------	--

**Dimensions**

6600-4

Length 35 mm

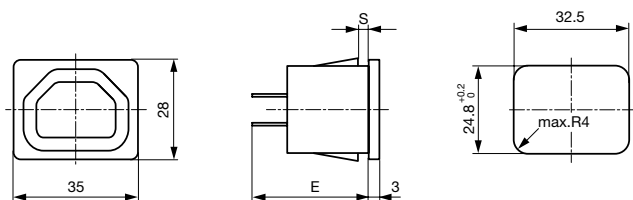

E: solder terminals 3.5x0.8mm 24.1mm

E: quick connect terminals 4.8x0.8mm 26.5mm

E: quick connect terminals 6.3x0.8mm 27.5mm

S: 1.0; 1.2; 2.0; 2.5; 3.0 mm

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

## Variants

Panel mounting	Panel Thickness s [mm]	Terminal	Order Number
Snap-in	1	Quick connect terminals 4.8 x 0.8 mm	6600.4210
Snap-in	1.2	Quick connect terminals 4.8 x 0.8 mm	6600.4212
Snap-in	1.5	Quick connect terminals 4.8 x 0.8 mm	6600.4215
Snap-in	2	Quick connect terminals 4.8 x 0.8 mm	6600.4220
Snap-in	2.5	Quick connect terminals 4.8 x 0.8 mm	6600.4225
Snap-in	3	Quick connect terminals 4.8 x 0.8 mm	6600.4230
Snap-in	1	Quick connect terminals 6.3 x 0.8 mm	6600.4310
Snap-in	1.2	Quick connect terminals 6.3 x 0.8 mm	6600.4312
Snap-in	1.5	Quick connect terminals 6.3 x 0.8 mm	6600.4315
Snap-in	2	Quick connect terminals 6.3 x 0.8 mm	6600.4320
Snap-in	2.5	Quick connect terminals 6.3 x 0.8 mm	6600.4325
Snap-in	3	Quick connect terminals 6.3 x 0.8 mm	6600.4330
Snap-in	1	Solder terminals 3.8 x 0.8 mm	6600.4110
Snap-in	1.2	Solder terminals 3.8 x 0.8 mm	6600.4112
Snap-in	1.5	Solder terminals 3.8 x 0.8 mm	6600.4115
Snap-in	2	Solder terminals 3.8 x 0.8 mm	6600.4120
Snap-in	2.5	Solder terminals 3.8 x 0.8 mm	6600.4125
Snap-in	3	Solder terminals 3.8 x 0.8 mm	6600.4130

Articles for enhanced glow wire test requirements acc. IEC 60695-2-11 to -13 can be ordered with ending ".15" (xxxx.xxxx.15). They are suitable for the use in unattended household equipment acc. IEC 60335-1.

**Packaging unit** 50 Pcs

## Accessory

### Description



[Assorted Covers](#)  
Rear Cover

0859.0047



[Cord retaining kits](#)  
Cord retaining strain relieve

Countersunk, D  
Countersunk, F

4700.0004  
4700.0006

## Mating Inlet/Plug

### Category / Description

#### plug connector



IEC plug connector E, rewirable, straight, max. cable diameter 8.5 mm  
IEC plug connector E, rewirable, angled, max. cable diameter 10 mm  
IEC plug connector E, rewirable, straight, max. cable diameter 10 mm  
IEC plug connector E, rewirable, angled, max. cable diameter 10 mm  
IEC plug connector E, rewirable, straight  
IEC plug connector E, rewirable, angled  
IEC plug connector E, rewirable, angled

4732  
4733  
4735  
4736  
9009  
9013  
P685



power interconnection cord

Power Cord with IEC Appliance Plug E, angled, 70°C	0607
Power Cord with IEC Appliance Plug E, angled, 70°C	0608
Power Cord with IEC Appliance Plug E, straight, 70°C	0609
Power Cord with IEC Appliance Plug G, angled, 70°C	607B
Power Cord with IEC Appliance Plug G, angled, 70°C	608B
Power Cord with IEC Appliance Plug G, straight, 70°C	609B