


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₀	RELEASED	03/22/95	<i>SPD</i>

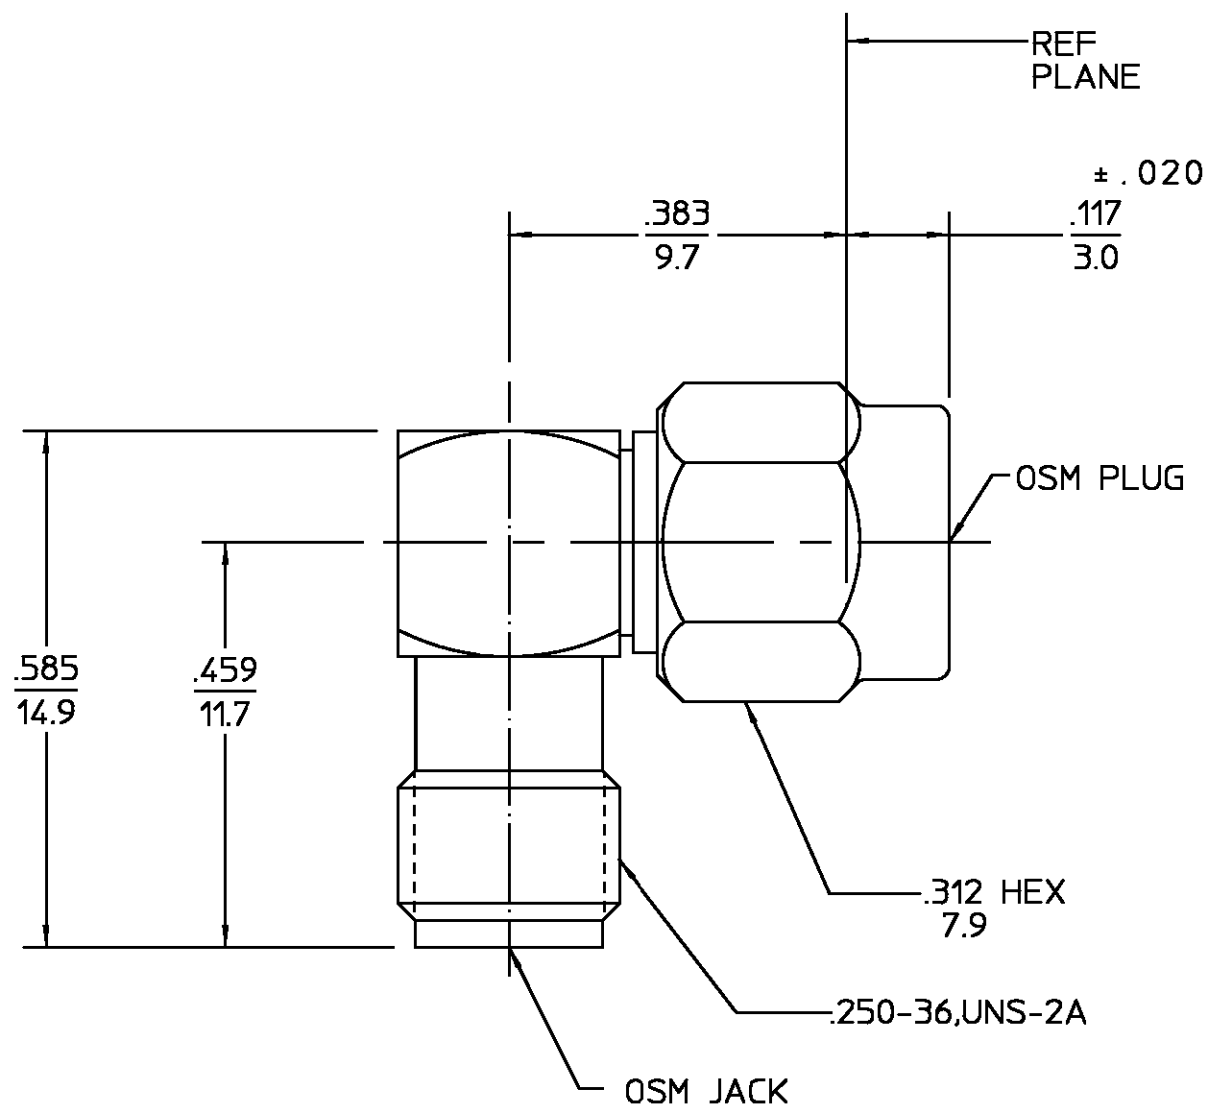

COPY IN PUERTO RICO
DESIGN CONTROL REQUIRED

HOUSING	STAINLESS STEEL PER	GOLD PLATE PER
CAP	ASTM-A484 AND ASTM-	MIL-G-45204
COUPLING NUT	A582, TYPE 303	
DIELECTRIC	TFE FLUOROCARBON PER	N/A
	MIL-P-19468 AND FED	
	SPEC L-P-403	
CENTER CONTACT	BERYLLIUM COPPER PER	GOLD PLATE PER
	ASTM-B-196 OR ASTM-B-197	MIL-G-45204
	ALLOY C17300, CONDITION H	
RETAINING RING	BERYLLIUM COPPER PER	N/A
	ASTM-B-194, ALLOY	
	C17200, CONDITION H	
GASKET	SILICONE RUBBER PER	N/A
	ZZ-R-765	

COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN BY <i>J. Davis</i> DATE 03/22/95	AMP Incorporated
FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°	CHECKED BY	140 Fourth Avenue
	APPD BY	Waltham, MA 02451-7599
These drawings and speci- fications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale o f item(s) without written permission.	USE ASSY PROCEDURE	TITLE OSM RIGHT ANGLE PLUG TO JACK ADAPTER
	NO. A.P. N/A	SIZE B CODE IDENT NO. 26805 1250-1249-00 REV 01 ₀
		SCALE 5:1 SHEET 1 OF 1

NOTES:
1. CAPTURED CENTER CONTACT

.XXX = in
XX.X = mm