


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₀	RELEASED	8/24/95 8/24/95	<i>DPG</i>
01 ₁	REVISED	DM 3/15/99	<i>Wag</i> 3/16/99

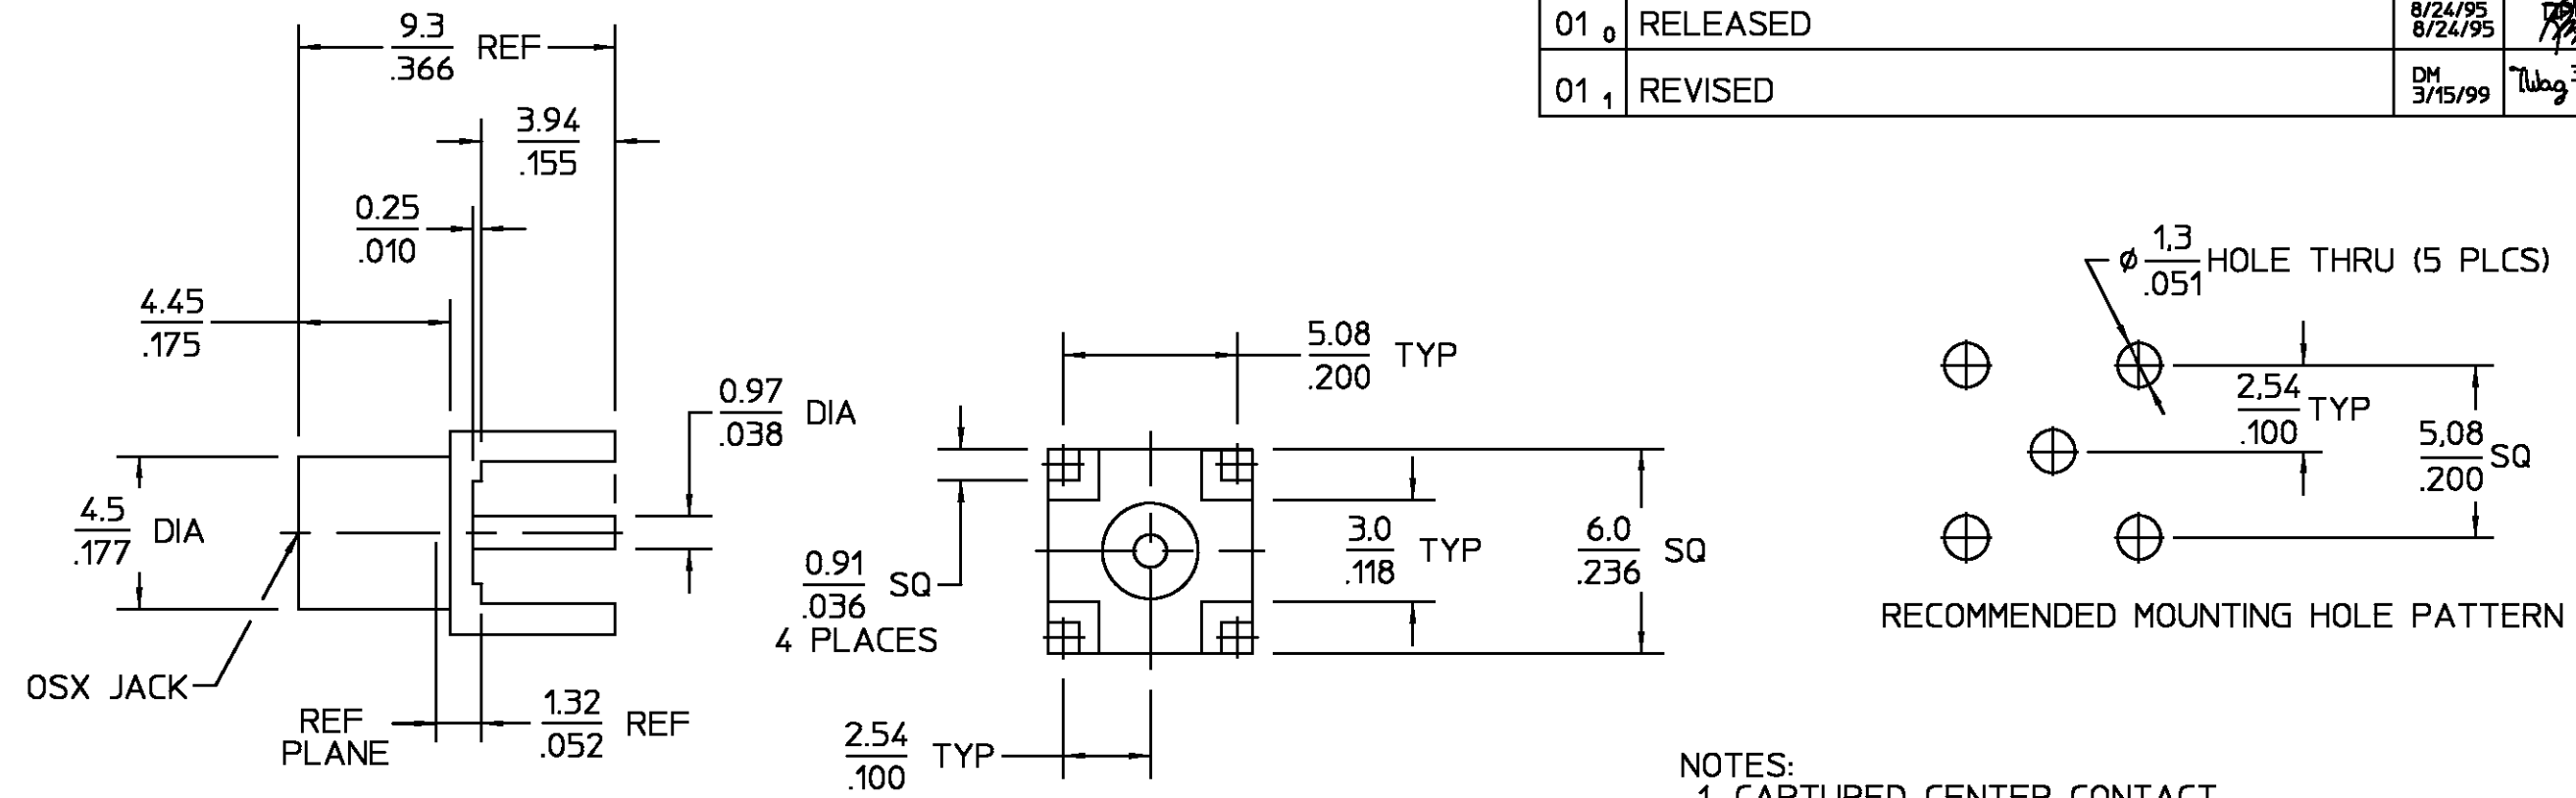

NOTES:
1. CAPTURED CENTER CONTACT

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	HOUSING	DIELECTRIC	CENTER CONTACT	COMPOUND	MATERIAL	FINISH	
Nominal Impedance (Ohms) <u>50</u> Frequency Range (GHz) <u>DC TO 6.0</u> Voltage Rating (VRMS MAX) <u>335 @ Sea level</u> VSWR <u>N/A</u> Insertion Loss <u>N/A</u> Corona, 70,000 Ft (VRMS MIN) <u>250</u> D.W.V. (VRMS MIN) <u>1000</u> Contact Resistance Center Contact (Milliohms MAX) <u>5.0</u> Outer Contact (Milliohms MAX) <u>1.0</u> RF High Potential (VRMS MIN @ 5 MHz) <u>670</u> I.R. (Megohms Min) <u>10,000</u>	Force to Engage: (Lbs) <u>3.4 MAX</u> Force to Disengage: (Lbs) <u>1.77 MIN - 4.5 MAX</u> Center Contact Captivation: Axial <u>4.5lbs @ 1 minute</u> with <u>.006"</u> displacement <u>XX.XX = mm</u> <u>.XXX = in</u>	Temperature Rating <u>-65°C to +165°C</u> Vibration <u>MIL-STD-202, Method 204,</u> <u>Condition B</u> Thermal shock <u>MIL-STD-202, Method 107,</u> <u>Condition B</u> Moisture Resistance <u>MIL-STD-202, Method 106</u> Corrosion <u>MIL-STD-202,</u> <u>Method 101, Condition B,</u> <u>48 Hrs</u>	BRASS PER ASTM-B-16, HALF HARD A582, TYPE 303	TFE FLUOROCARBON PER ASTM-D-1457	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204	N/A	GOLD PLATE PER MIL-G-45204	
			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCE ON DEC ANGLES +0.15 ° ±		DRAWN BY <u>D. GRAVINA</u> DATE <u>8/24/95</u> CHECKED BY <u>DPG</u> 8/24/95 APP'D BY <i>[Signature]</i> 8/24/95		AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599		
			These drawings and specifications are the property of AMP incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		USE ASSY PROCEDURE NO. AP. <u>N/A</u>		TITLE <u>OSX PRINTED WIRING BOARD JACK RECEPTACLE STRAIGHT TERMINAL</u>		
					SIZE <u>B</u>		CODE IDENT NO. <u>26805</u>		REV <u>01₁</u>
					SCALE <u>5:1</u>		SHEET 1 OF 1		

CUSTOMER DRAWING

AMP PART # 1330126-1
SHEET 1 OF 1 REV A