THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	EC 0G3C 0760 04	24DEC04	BSV	JLG

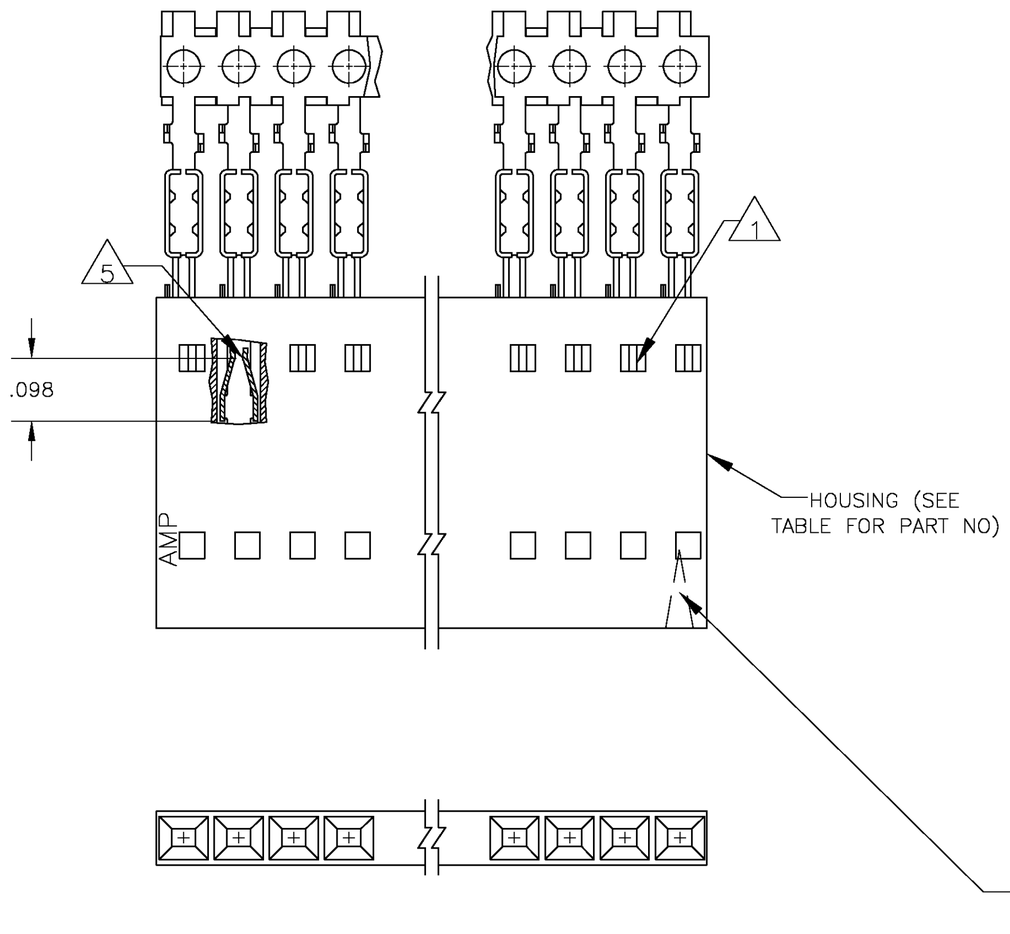

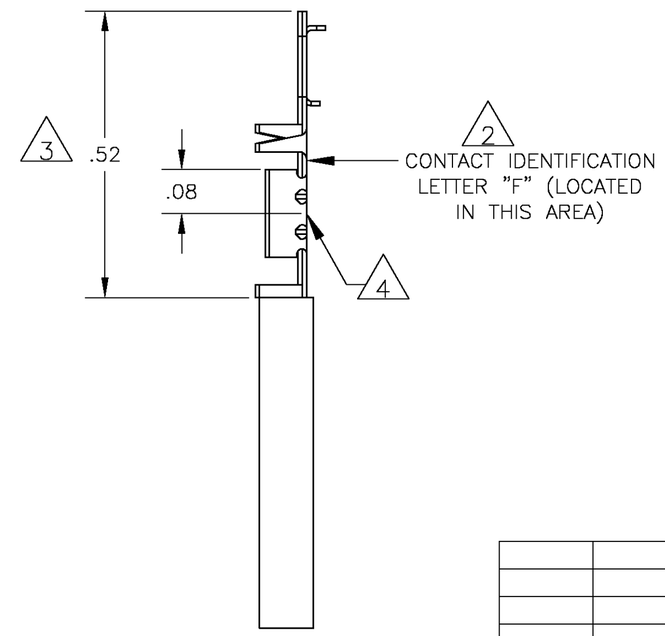

1. CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
2. USE WITH #22–#26 AWG WIRE SIZE, .054–.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
3. THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
4. POINT OF MEASUREMENT FOR PLATING THICKNESS
5. POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
6. CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050–.000100 BRIGHT TIN–LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
7. CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050–.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.

	PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER
	7	1–103688–2	13	6–104464–2
OBSOLETE		1–103688–9	20	1–104464–9
	6	1–103688–2	13	1–104464–2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	–
1 PLC	±	–
2 PLC	±	.02
3 PLC	±	.005
4 PLC	±	–
ANGLES	±	–

MATERIAL :HOUSING–FLAME RETARDANT–THERMOPLASTIC, COLOR–BLACK CONTACTS– PHOS BRONZE

FINISH SEE TABLE

DWN H MOLL 24DEC2004
CHK P deJONG –
APVD P deJONG –
PRODUCT SPEC 108–25034
APPLICATION SPEC 114–25026
WEIGHT –

tyco Electronics — Tyco Electronics Corporation, Harrisburg, Pa 17105–3608

NAME RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L, HIGH PRESSURE FOR #22–#26 AWG WIRE SIZE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-104464	–

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV E

104464