


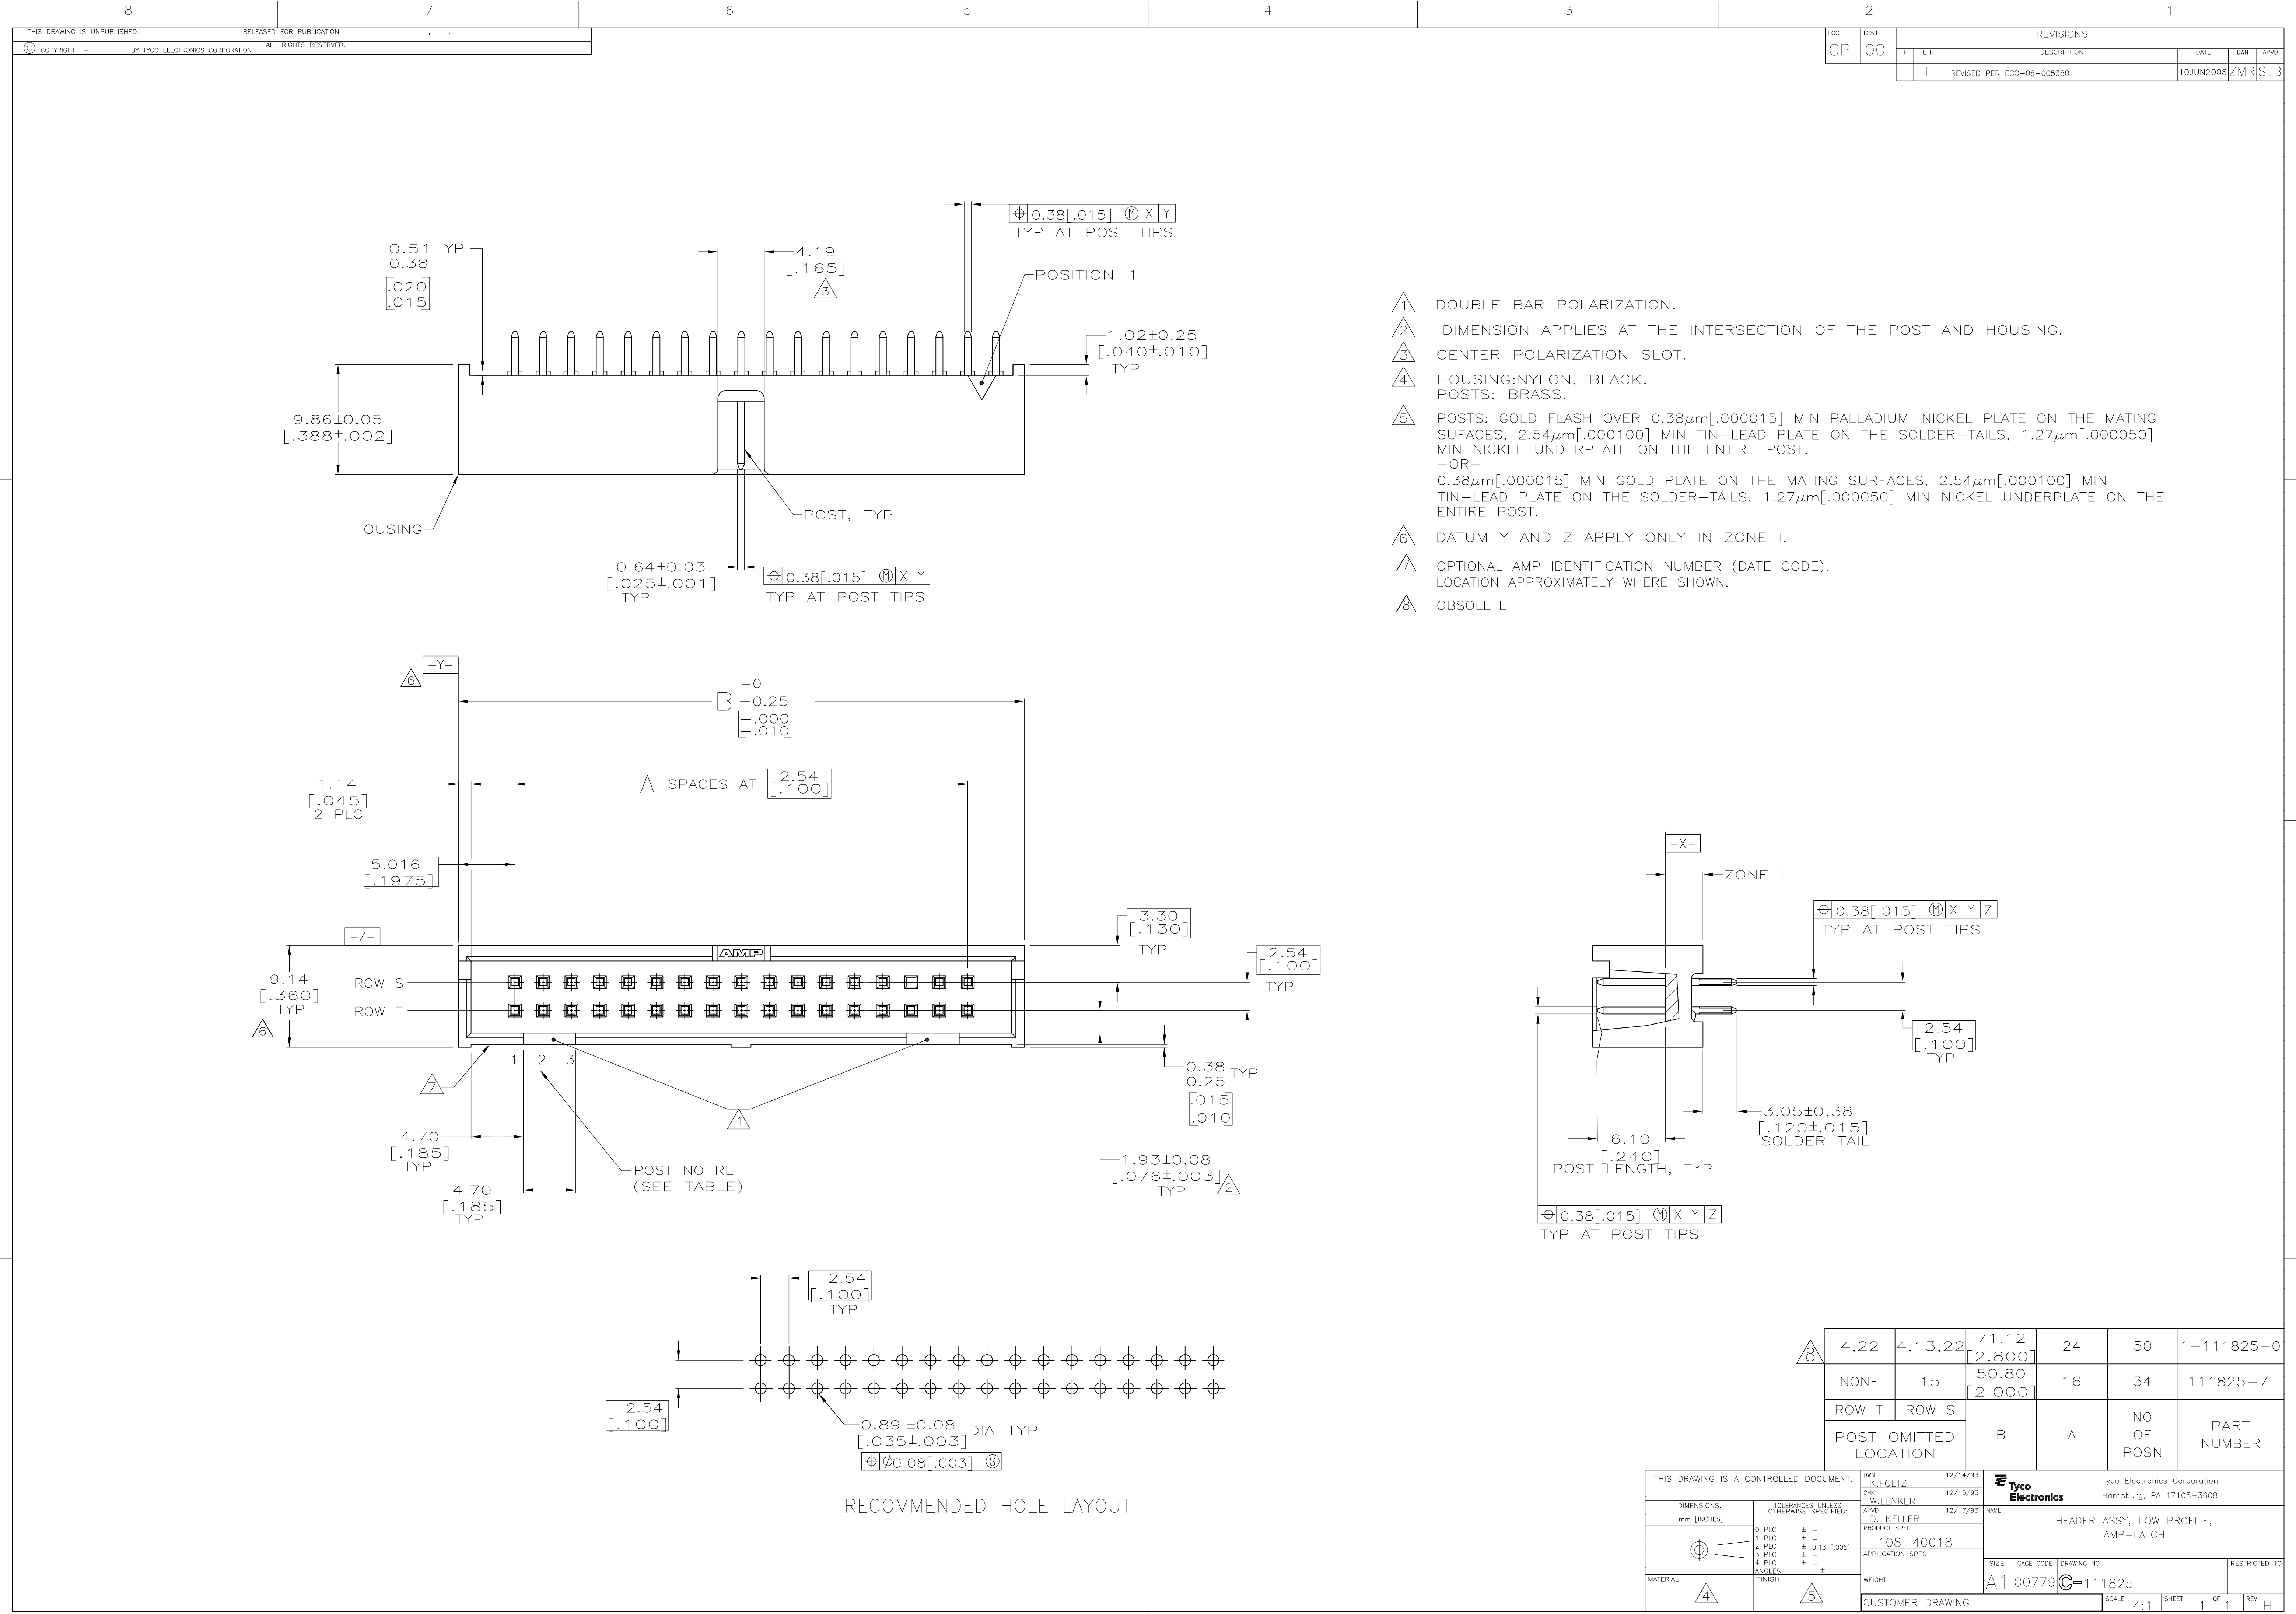

- 1 DOUBLE BAR POLARIZATION.
- 2 DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING.
- 3 CENTER POLARIZATION SLOT.
- 4 HOUSING: NYLON, BLACK.
POSTS: BRASS.
- 5 POSTS: GOLD FLASH OVER 0.38μm[.000015] MIN PALLADIUM-NICKEL PLATE ON THE MATING SURFACES, 2.54μm[.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAILS, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
-OR-
0.38μm[.000015] MIN GOLD PLATE ON THE MATING SURFACES, 2.54μm[.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAILS, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- 6 DATUM Y AND Z APPLY ONLY IN ZONE I.
- OPTIONAL AMP IDENTIFICATION NUMBER (DATE CODE).
LOCATION APPROXIMATELY WHERE SHOWN.
- OBsolete

4,22	4,13,22	71.12 [2.800]	24	50	1-111825-0
NONE	15	50.80 [2.000]	16	34	111825-7
ROW T	ROW S			NO OF POSN	PART NUMBER
POST OMITTED LOCATION		B	A		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.FOLTZ 12/14/93	Tyco Electronics Corporation Harrisburg, PA 17105-3608		
DIMENSIONS: mm [INCHES]		CHK W.LENKER 12/15/93	NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D.KELLER 12/17/93	PRODUCT SPEC 108-40018		
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC		SIZE A1	
MATERIAL		FINISH		WEIGHT	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1	
				REV H	