

## FLKM 50-PA-AB/OBN

Order No.: 2289829

The illustration shows version FLKM 50-PA-AB/IBN

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2289829>

VARIOFACE front adapter, for Allen-Bradley PLC 5, 1771, 32  
channels can be connected, output

Commercial data	
EAN	4017918057817
Pack	2 Pcs.
Customs tariff	85369010
Weight/Piece	0.118 KG
Catalog page information	Page 163 (IF-2007)

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>General</b>	
Nominal voltage $U_N$	60 V AC/DC
Connection type, plug connector	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of plug connectors	1
No. of positions, plug connector	50
Number of positions	50
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any

Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Max. permissible current	Per path 1 A
	per connection 2 A (during supply via separate power supply)
Pollution degree	2
Surge voltage category	II

**Certificates / Approvals**

Approval logo




**requested approbations**

Certification	CUL, GOST, UL
---------------	---------------

**Drawings**

Circuit diagram

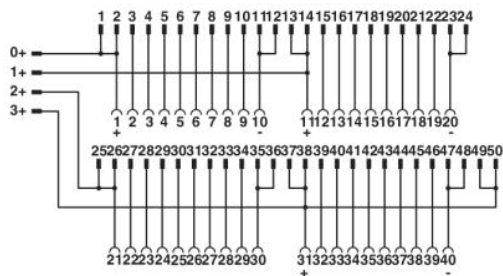

Connection scheme FLKM 50-PA-AB/OBN

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact  
Technical modifications reserved;