


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS			DATE	APPD
AF	50			ZONE	LTR	DESCRIPTION		
					P	REV PER 0G1A-0145-99	3JUN99	JR/DB

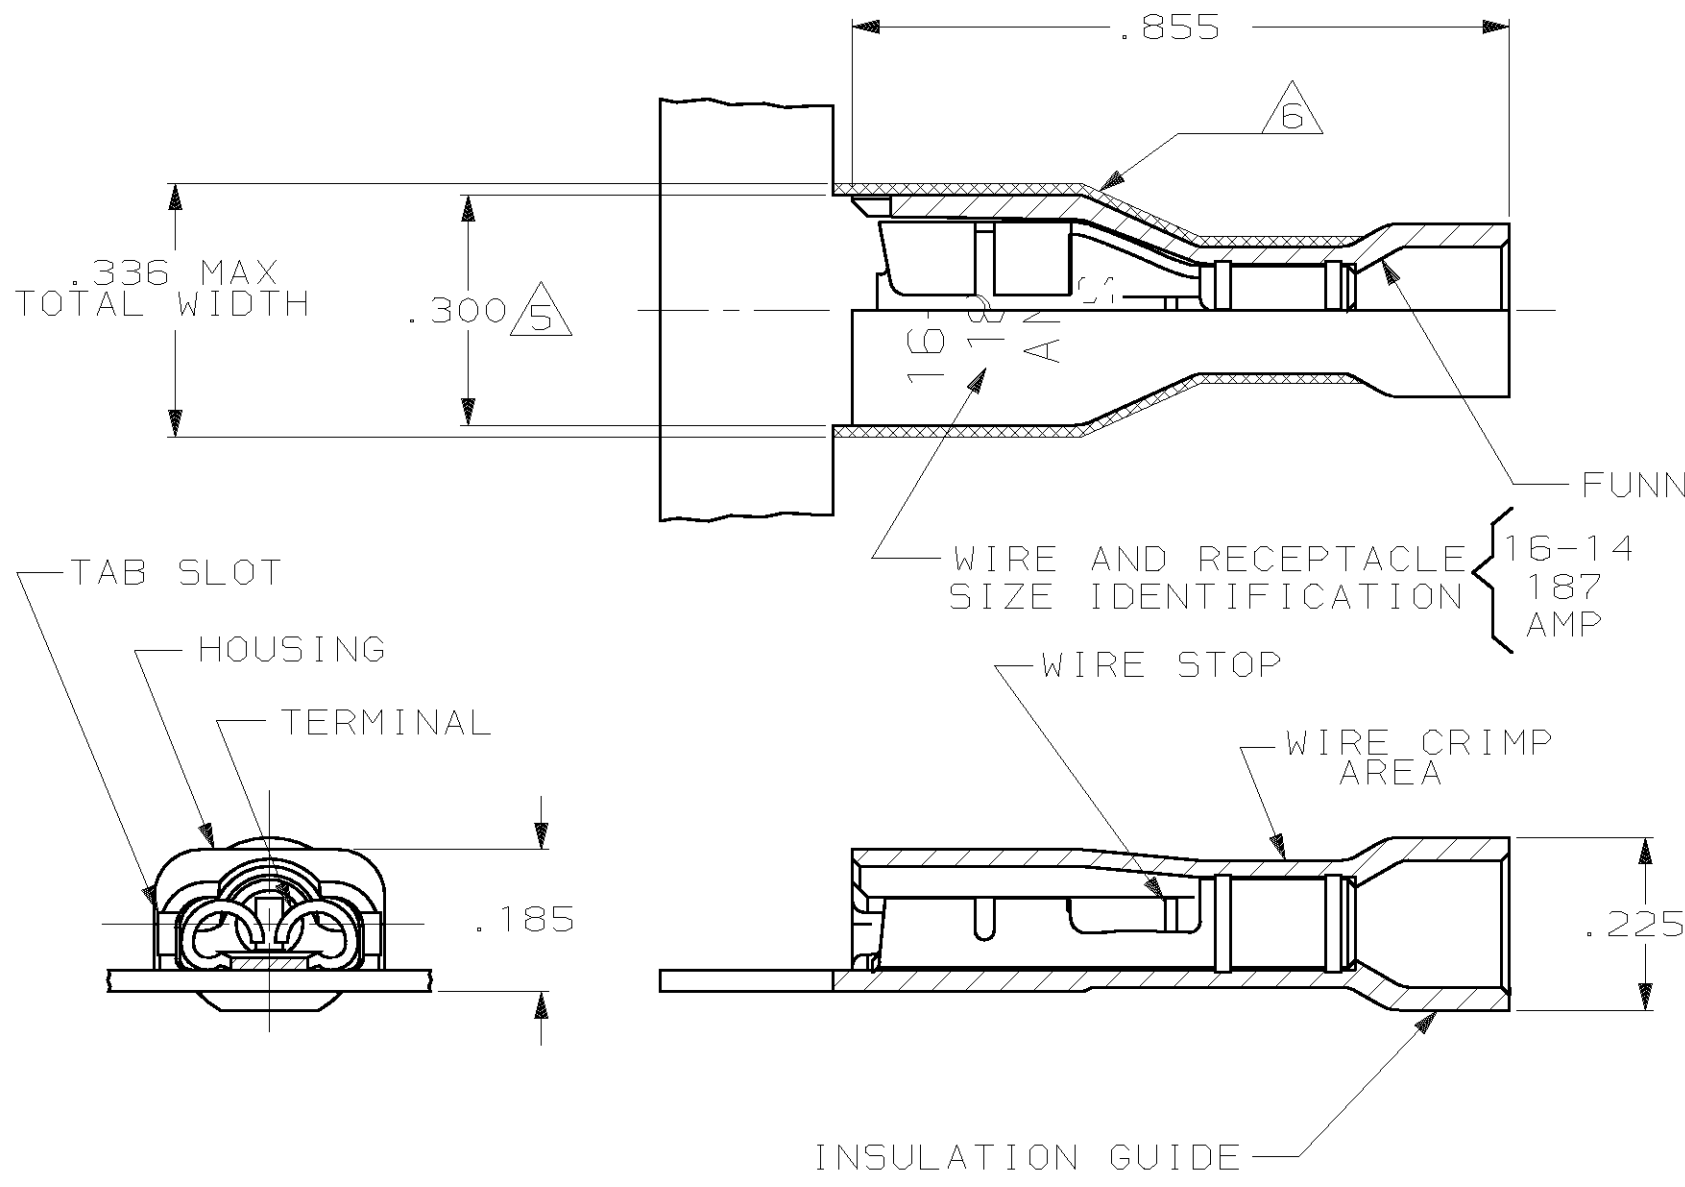

- 1 MATES WITH .020±.001×.187 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .160 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- △5 DIMENSION DOES NOT INCLUDE TRIM BURR
- △6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA.

BULK	HOUSING: NYLON, COLOR-BLUE TRANSLUCENT	5-350815-2
STANDARD	RECEPTACLE: #3 HARD BRASS	3-350815-2
PACKAGING	TIN PL .000080 MIN THK	PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± .015 ANGLES ± -	DR 11/7/88 P FORTNEY	AMP INCORPORATED Harrisburg, Pa. 17105
	CHK 11/7/88 MS FEHER	
	APPD 11/7/88 K RANDOLH	
	APPD 11/14/88 T SHUTTER	
MATERIAL SEE TABLE	PRODUCT SPEC 108-2043	NAME RECEPTACLE ASSY, ULTRA-FAST, .187 SERIES, 16-14 AWG
FINISH SEE TABLE	APPLICATION SPEC 114-2123	SIZE <b>B</b>
	WEIGHT -	FSCM NO 00779
		DRAWING NO 350815
		SCALE 4:1
		SHEET 1 OF 1