FILE NO.	C-CD-804-02

NOTES:

① MAT'L: COPPER (STOCK TKN. $\frac{.040}{1.02}$ ±.001)
PLATING: ELECTRO TIN (.0003 MIN)

② TIN-PLATED BRASS FUNNEL FERRULE

③ NYLON INSULATION (COLOR CODED YELLOW)

STUD SIZES: (±.005)

02 = .094
04 = .119
06 = .146
08 = .173
10 = .198
14 = .265
56 = .328
38 = .390

"UL" LISTING #E32244
"CSA" LISTING #18689

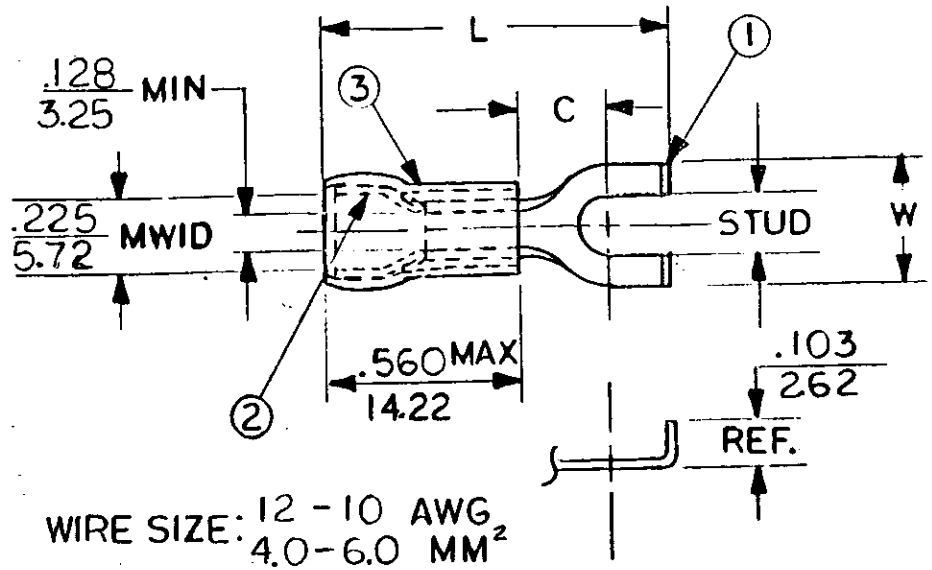

WIRE SIZE: 12 - 10 AWG
4.0 - 6.0 MM²

ALL DIMENSIONS = INCHES / MM

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.				AVAILABLE STUD SIZES	
C-817-	.375 / 9.53	.301 / 7.65	1.076 / 27.33				06, 08, 10	

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED			REFERENCE	SCALE: NTS	DATE	TITLE:
FRAC.	DEC.	ANG.		DRWN. BY: JJ	11·13·84	FLANGED SPADE TONGUE TERMINAL AVIKRIMP 800-SERIES
±	±	±		CHKD. BY: GZ	11·26·84	
				APPRD. BY:		

ETC molex INCORPORATED

DWG. NO. A CUSTOMER DWG