



88CNQ060APbF 88CNQ060ASMPbF

SCHOTTKY RECTIFIER
New GenIII D-61 Package

80 Amp

Major Ratings and Characteristics





Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	80	A
V_{RRM}	60	V
I_{FSM} @tp = 5 μ s sine	5000	A
V_F @40 Apk, $T_J = 125^\circ\text{C}$ (per leg)	0.56	V
T_J range	-55 to 150	$^\circ\text{C}$

Description/ Features

The center tap Schottky rectifier module has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical applications are in switching power supplies, converters, free wheeling diodes, and reverse battery protection.

- 150 °C T_J operation
- Center tap module
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- *New fully transfer-mold low profile, small footprint, high current package*
- Through-hole versions are currently available for use in Lead-Free applications ("PbF" suffix)

Case Styles
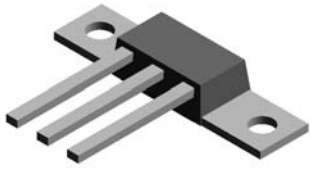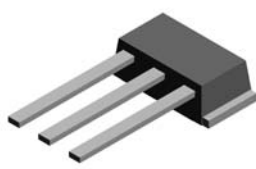
<p>88CNQ060APbF</p>  <div style="text-align: center;">  <p>D61-8</p> </div>	<p>88CNQ060ASMPbF</p>  <div style="text-align: center;">  <p>D61-8-SM</p> </div>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Voltage Ratings

Part number	88CNQ060A..
V_R Max. DC Reverse Voltage (V)	60
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	88CNQ	Units	Conditions
$I_{F(AV)}$ Max. Av. Forward Current (Per Leg) See Fig. 5 (Per Device)	40 80	A	50% duty cycle @ $T_C = 120^\circ\text{C}$, rectangular wave form (Rated V_R)
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) See Fig. 7	5000 600	A	5 μs Sine or 3 μs Rect. pulse 10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated V_r applied
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	75	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 1$ Amps, $L = 0.57$ mH
I_{AR} Repetitive Avalanche Current (Per Leg)	1.0	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	88CNQ	Units	Conditions
V_{FM} Max. Forward Voltage Drop (Per Leg) (1)	0.58	V	@ 40A $T_J = 25^\circ\text{C}$
	0.77	V	@ 80A
	0.56	V	@ 40A $T_J = 125^\circ\text{C}$
	0.67	V	@ 80A
I_{RM} Typical Reverse Leakage Current (Per Leg) See Fig. 2 (1)	0.64	mA	$T_J = 25^\circ\text{C}$ $V_R = \text{rated } V_R$
	240	mA	$T_J = 125^\circ\text{C}$
C_T Max. Junction Capacitance (Per Leg)	5200	pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance (Per Leg)	5.5	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change (Rated V_R)	10000	V/ μs	

(1) Pulse Width < 300 μs , Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	88CNQ	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	0.85	$^\circ\text{C}/\text{W}$	DC operation
R_{thJC} Max. Thermal Resistance Junction to Case (Per Package)	0.42	$^\circ\text{C}/\text{W}$	DC operation
R_{thCS} Typical Thermal Resistance, Case to Heatsink (D61-8 Only)	0.30	$^\circ\text{C}/\text{W}$	Mounting surface, smooth and greased Device flatness < 5 mils
wt Approximate Weight	7.8(0.28)	g(oz.)	
T Mounting Torque (D61-8 Only)	Min.	40(35)	Kg-cm (lbf-in)
	Max.	58(50)	

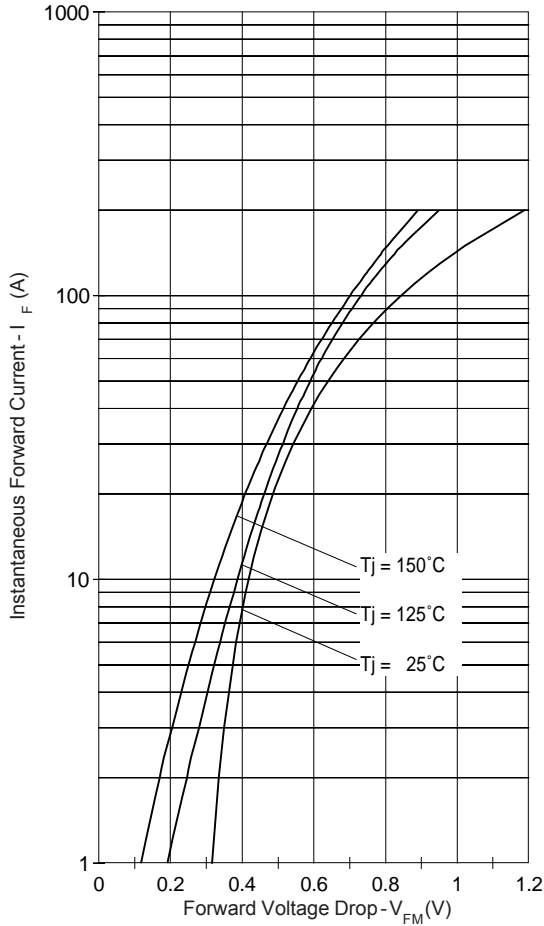


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

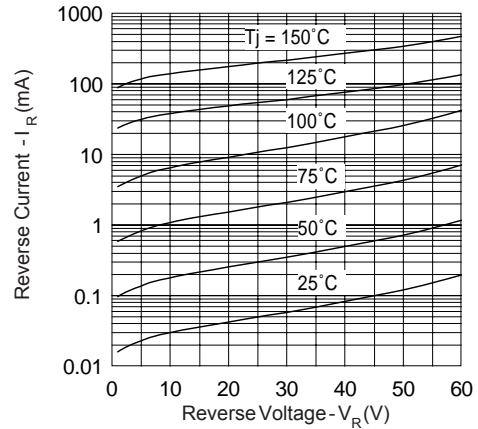


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

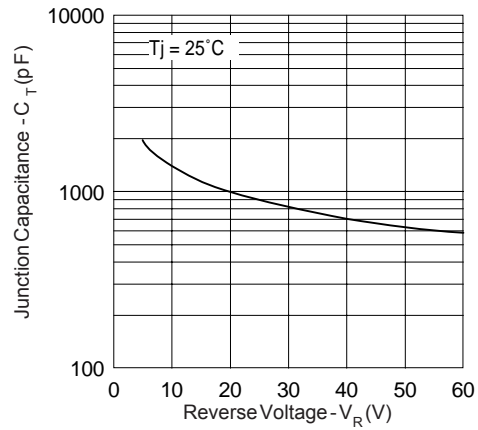


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

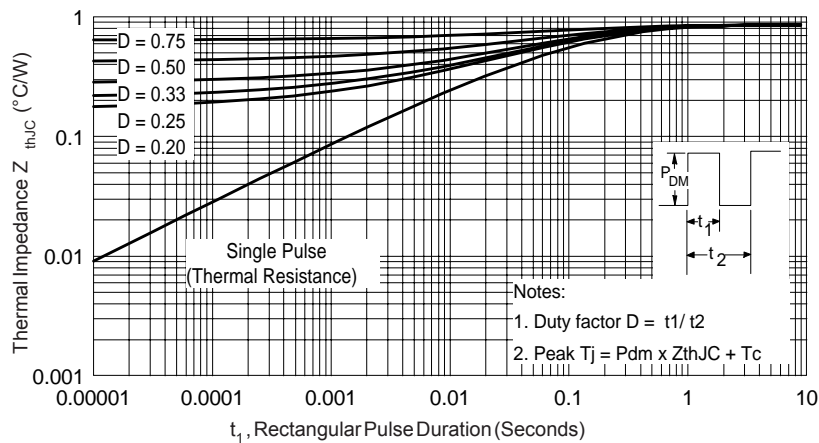


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

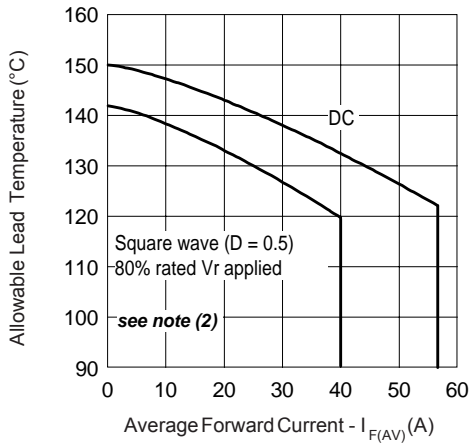


Fig. 5 - Maximum Average Forward Current Vs. Allowable Lead Temperature

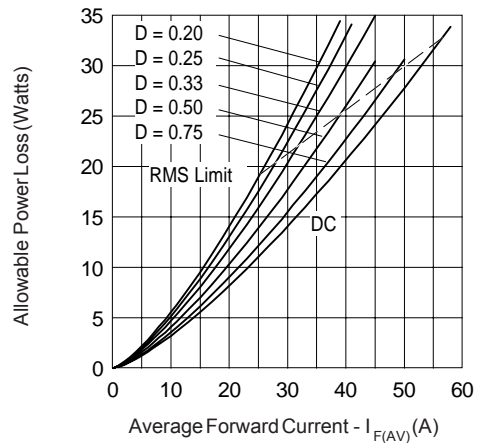


Fig. 6 - Maximum Average Forward Dissipation Vs. Average Forward Current


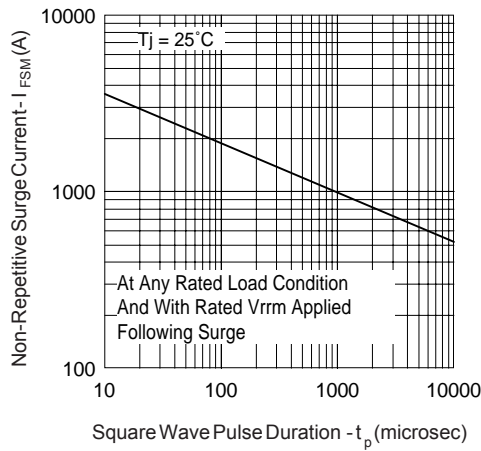


Fig. 7 - Maximum Peak Surge Forward Current Vs. Pulse Duration

- (2) Formula used: $T_c = T_j - (Pd + Pd_{REV}) \times R_{thJC}$;
 $Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\% \text{ rated } V_R$

Outline Table

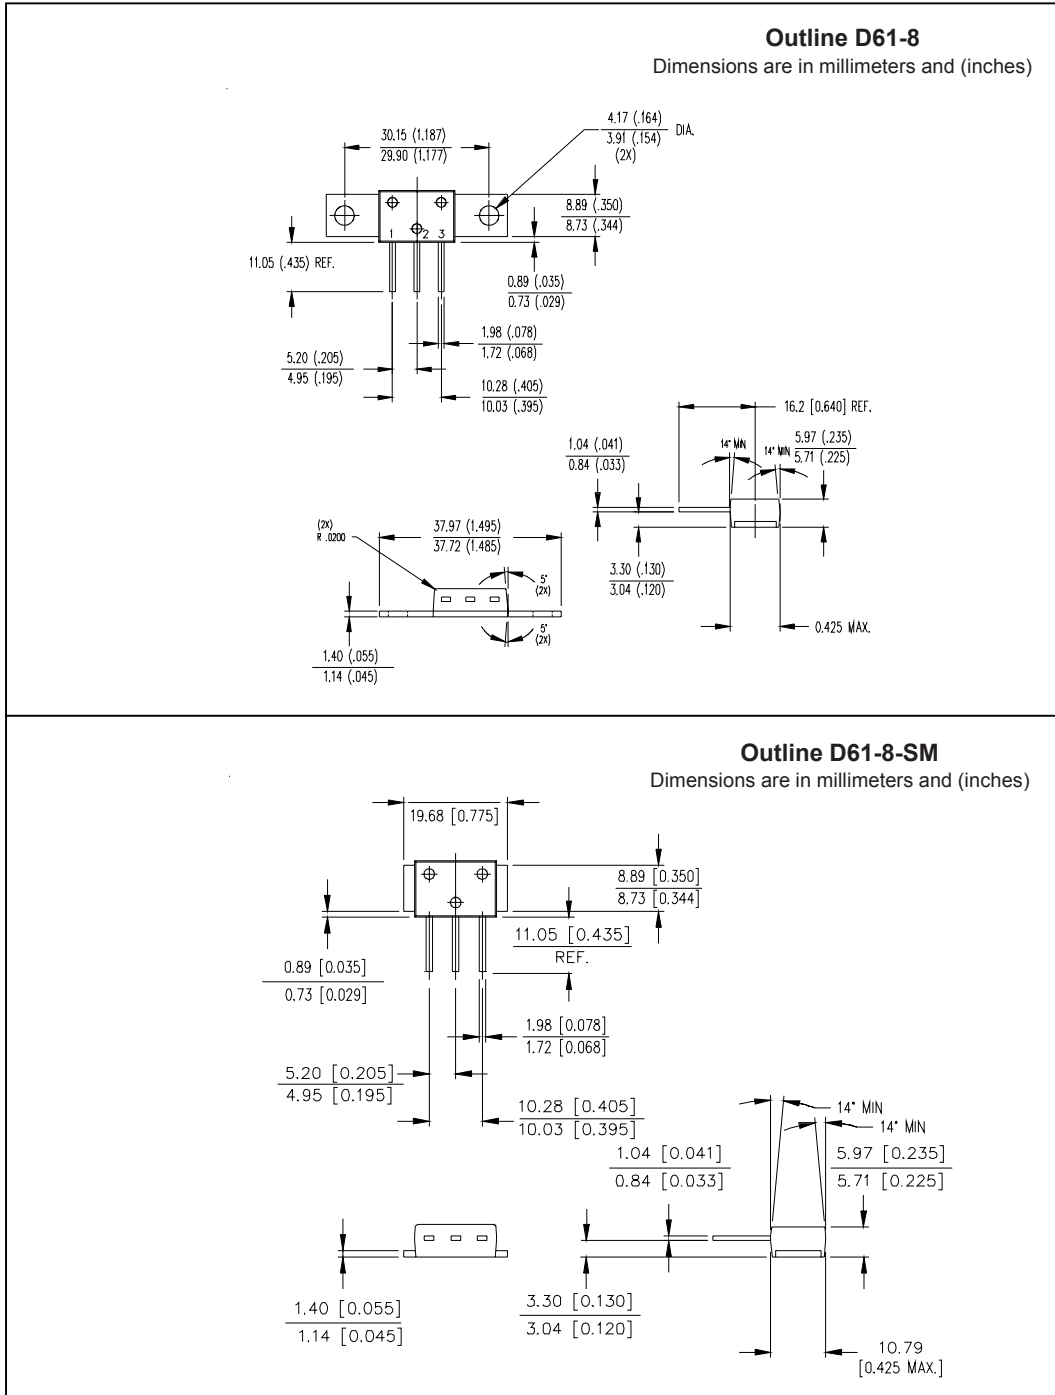

Outline D61-8-SM
 Dimensions are in millimeters and (inches)

Part Marking Information

D61-8

EXAMPLE: THIS IS A 88CNQ060A WITH
 LOT CODE 89 09
 ASSEMBLED ON WW 45, 2000

Note: "P" in assembly line
 position indicates "Lead-Free"

INTERNATIONAL
RECTIFIER
LOGO

PART NUMBER

88CNQ060A

89 09 045P

ASSEMBLY
LOT CODE

DATE CODE
 YEAR 0 = 2000
 WEEK 45
 P = LEAD-FREE

D61-8-SM

EXAMPLE: THIS IS A 88CNQ060ASM WITH
 LOT CODE 89 09
 ASSEMBLED ON WW 45, 2000

Note: "P" in assembly line
 position indicates "Lead-Free"

INTERNATIONAL
RECTIFIER
LOGO

PART NUMBER

88CNQ060ASM

89 09 045P

ASSEMBLY
LOT CODE

DATE CODE
 YEAR 0 = 2000
 WEEK 45
 P = LEAD-FREE

Ordering Information Table

Device Code	
88	C
N	Q
060	A
PbF	
①	②
③	④
⑤	⑥
⑦	
1	- Current Rating (80A)
2	- Circuit Configuration C = Common Cathode
3	- Package N = D-61
4	- Schottky "Q" Series
5	- Voltage Rating (060 = 60V)
6	- <ul style="list-style-type: none"> • A = D-61-8 package style • ASM = D-61-8-SM package style
7	- <ul style="list-style-type: none"> • none = Standard Production • PbF = Lead-Free
Standard pack quantity: A = 10 pieces ASM = 20 pieces	

Data and specifications subject to change without notice.
 This product has been designed and qualified for Industrial Level and Lead-Free.
 Qualification Standards can be found on IR's Web site.