

HTZ130B Series

$I_{F(AV)} = 1.0 \text{ A}$
 $V_{RRM} = 38000 \text{ V}$

High Voltage Diode Rectifier Module

LARONTROL

Electronic Devices

Type Number	Repetitive Peak	Minimum Avalanche Voltage $V_{(BR)R}$
HTZ130B38K	38000	40800
HTZ130B33K	33000	36000
HTZ130B28K	28000	31200
HTZ130B24K	24000	26400

CIRCUIT DIAGRAM

CURRENT RATINGS - AIR COOLED			
$I_{F(AV)}$	Mean forward current	Half wave resistive load $T_{amb} = 35^\circ\text{C}$	1.0 A
I_F	Continuous (direct) forward current	$T_{amb} = 35^\circ\text{C}$	1.2 A
$R_{th(j-a)}$	Thermal resistance junction to ambient		5.7 $^\circ\text{C/W}$
CURRENT RATINGS - OIL COOLED			
$I_{F(AV)}$	Mean forward current	Half wave resistive load $T_{oil} = 60^\circ\text{C}$	3.1 A
I_T	Continuous (direct) forward current	$T_{oil} = 60^\circ\text{C}$	3.6 A
$R_{th(j-o)}$	Thermal resistance junction to oil		1.2 $^\circ\text{C/W}$
SURGE RATINGS			
I^2t	I^2t for fusing	10 ms half sine $T_{vj} = 150^\circ\text{C}$	50 A^2sec
I_{FSM}	Surge (non-repetitive) forward current	$T_{vj} = 150^\circ\text{C}$	100 A
TEMPERATURE AND FREQUENCY RATINGS			
T_{vj}	Virtual junction temperature	Forward (conducting)	180 $^\circ\text{C}$
		Reverse (blocking)	180 $^\circ\text{C}$
T_{stg}	Storage temperature range		-40 to 100 $^\circ\text{C}$
f	Frequency range		20 to 400 Hz
CHARACTERISTICS $T_{case} = 25^\circ\text{C}$ unless otherwise stated			
V_{FM}	Forward voltage	At 2 Amps peak	max 24.0 V
I_{RM}	Peak reverse current	At V_{RRM} ; $T_{case} = 150^\circ\text{C}$	max 0.5 mA

Dimensioned Outlines
Dimensions shown are maximum in mm
Weight typ.: 0,38 Kg
IXYS reserves the right to change limits, test conditions and dimensions.

Distributed by
 USA
 3540 Bassett Street
 Santa Clara, CA 95054
 Phone: (408) 982-0700
 FAX: (408) 496-0670

EUROPE
 IXYS Semiconductor GmbH
 Lampertheim Germany
 Phone: +49.6206.503.0
 Fax: +49.6206.503.627

IXYS
 www.IXYS.net

HTZ130B Series


$I_{F(AV)} = 1.0 \text{ A}$

$V_{RRM} = 38000 \text{ V}$


High Voltage Diode Rectifier Module

LARONTROL

Electronic Devices

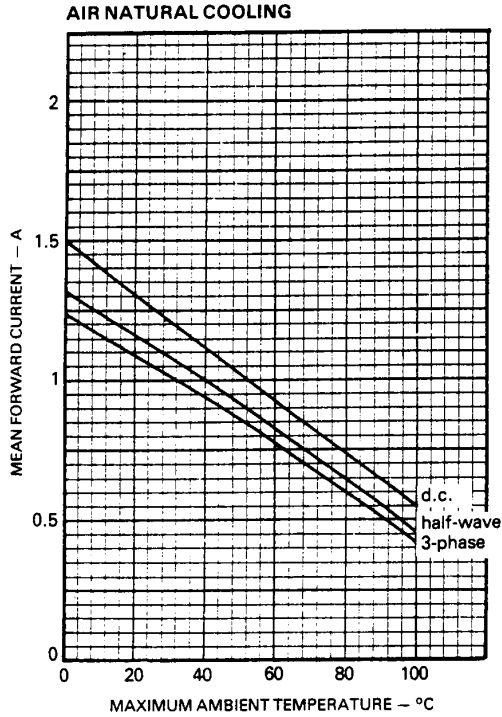

DERATING CURVES

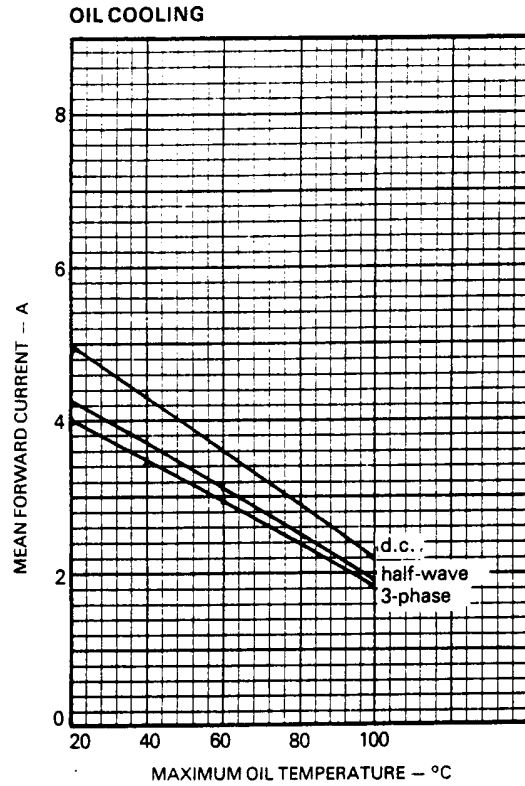

DERATING CURVES

