

## Standard Recovery Diodes, (Stud Version), 85 A



DO-203AB (DO-5)

### FEATURES

- High surge current capability
- Stud cathode and stud anode version
- Leaded version available
- Types up to 1600 V  $V_{RRM}$
- RoHS compliant
- Designed and qualified for industrial level


**RoHS**  
COMPLIANT

### TYPICAL APPLICATIONS

- Battery chargers
- Converters
- Power supplies
- Machine tool controls
- Welding

### PRODUCT SUMMARY

$I_{F(AV)}$	85 A
-------------	------

### MAJOR RATINGS AND CHARACTERISTICS

PARAMETER	TEST CONDITIONS	85HF(R)		UNITS
		10 TO 120	140/160	
$I_{F(AV)}$		85		A
	$T_C$	140	110	°C
$I_{F(RMS)}$		133		A
$I_{FSM}$	50 Hz	1700		A
	60 Hz	1800		
$I^2t$	50 Hz	14 500		A <sup>2</sup> s
	60 Hz	13 500		
$V_{RRM}$	Range	100 to 1200	1400/1600	V
$T_J$		- 65 to 180	- 65 to 150	°C

### ELECTRICAL SPECIFICATIONS

#### VOLTAGE RATINGS

TYPE NUMBER	VOLTAGE CODE	$V_{RRM}$ , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	$V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	$I_{RRM}$ MAXIMUM AT $T_J = T_J$ MAXIMUM mA
85HF(R)	10	100	200	9
	20	200	300	
	40	400	500	
	60	600	700	
	80	800	900	
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	4.5
160	1600	1700		

# 85HF(R) Series



Vishay High Power Products Standard Recovery Diodes,  
(Stud Version), 85 A

FORWARD CONDUCTION							
PARAMETER	SYMBOL	TEST CONDITIONS			85HF(R)		UNITS
					10 to 120	140/160	
Maximum average forward current at case temperature	$I_{F(AV)}$	180° conduction, half sine wave			85		A
					140	110	°C
Maximum RMS forward current	$I_{F(RMS)}$				133		A
Maximum peak, one-cycle forward, non-repetitive surge current	$I_{FSM}$	t = 10 ms	No voltage reappplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	1700		A
		t = 8.3 ms			1800		
		t = 10 ms	100 % $V_{RRM}$ reappplied		1450		
		t = 8.3 ms			1500		
Maximum $I^2t$ for fusing	$I^2t$	t = 10 ms	No voltage reappplied		14 500		A <sup>2</sup> s
		t = 8.3 ms			13 500		
		t = 10 ms	100 % $V_{RRM}$ reappplied		10 500		
		t = 8.3 ms			9400		
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	t = 0.1 to 10 ms, no voltage reappplied			16 000		A <sup>2</sup> √s
Value of threshold voltage (up to 1200 V)	$V_{F(TO)}$	$T_J = T_J$ maximum			0.68		V
Value of threshold voltage (for 1400 V, 1600 V)					0.69		
Value of forward slope resistance (up to 1200 V)	$r_f$	$T_J = T_J$ maximum			1.62		mΩ
Value of forward slope resistance (for 1400 V, 1600 V)					1.75		
Maximum forward voltage drop	$V_{FM}$	$I_{pk} = 267$ A, $T_J = 25$ °C, $t_p = 400$ μs rectangular wave			1.2	1.4	V

THERMAL AND MECHANICAL SPECIFICATIONS							
PARAMETER	SYMBOL	TEST CONDITIONS			85HF(R)		UNITS
					10 to 120	140/160	
Maximum junction operating and storage temperature range	$T_J, T_{Stg}$				- 65 to 180	- 65 to 150	°C
Maximum thermal resistance, junction to case	$R_{thJC}$	DC operation			0.35		K/W
Maximum thermal resistance, case to heatsink	$R_{thCS}$	Mounting surface, smooth, flat and greased			0.25		
Maximum shock <sup>(1)</sup>					1500		g
Maximum constant vibration <sup>(1)</sup>		50 Hz			20		
Maximum constant acceleration <sup>(1)</sup>		Stud outwards			5000		
Allowable mounting torque		Not lubricated threads			3.4 + 0 - 10 % (30)		N · m (lbf · in)
		Lubricated threads			2.3 + 0 - 10 % (20)		
Approximate weight		Unleaded device			17		g
					0.6		oz.
Case style		See dimensions - link at the end of datasheet			DO-203AB (DO-5)		

## Notes

<sup>(1)</sup> Available only for 88HF



$\Delta R_{thJC}$ CONDUCTION				
CONDUCTION ANGLE	SINUSOIDAL CONDUCTION	RECTANGULAR CONDUCTION	TEST CONDITIONS	UNITS
180°	0.10	0.08	T <sub>J</sub> = T <sub>J</sub> maximum	K/W
120°	0.11	0.11		
90°	0.13	0.13		
60°	0.17	0.17		
30°	0.26	0.26		

**Note**

- The table above shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC

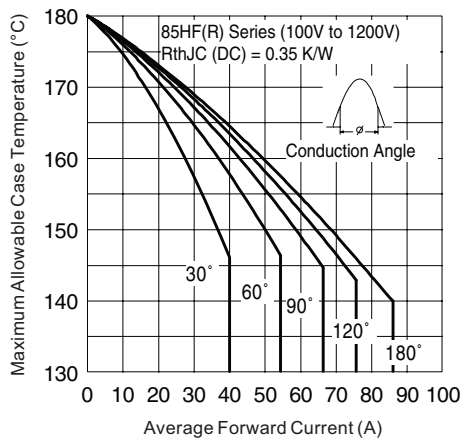


Fig. 1 - Current Ratings Characteristics

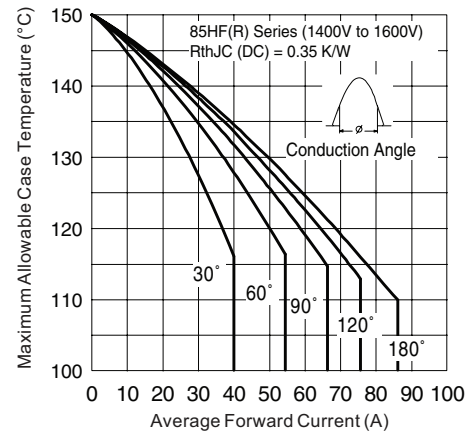


Fig. 3 - Current Ratings Characteristics

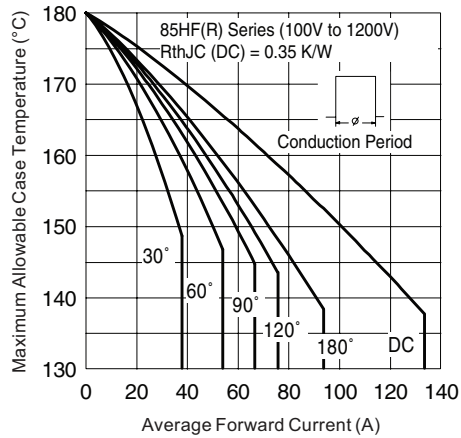


Fig. 2 - Current Ratings Characteristics

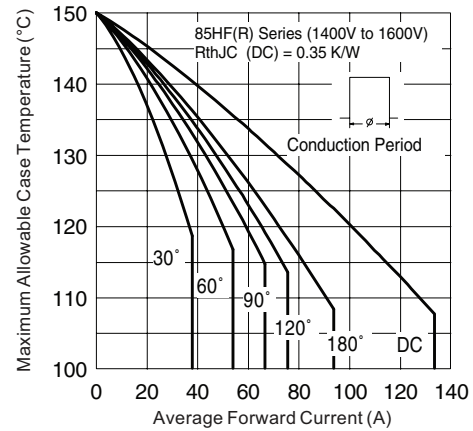


Fig. 4 - Current Ratings Characteristics

# 85HF(R) Series



Vishay High Power Products Standard Recovery Diodes,  
(Stud Version), 85 A

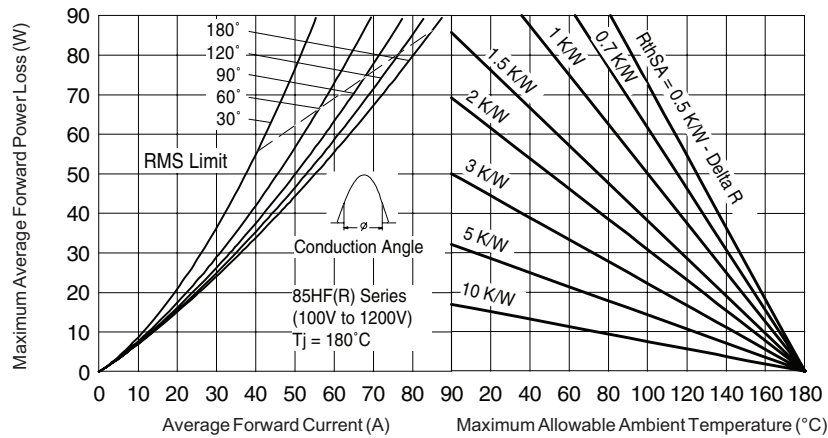


Fig. 5 - Forward Power Loss Characteristics

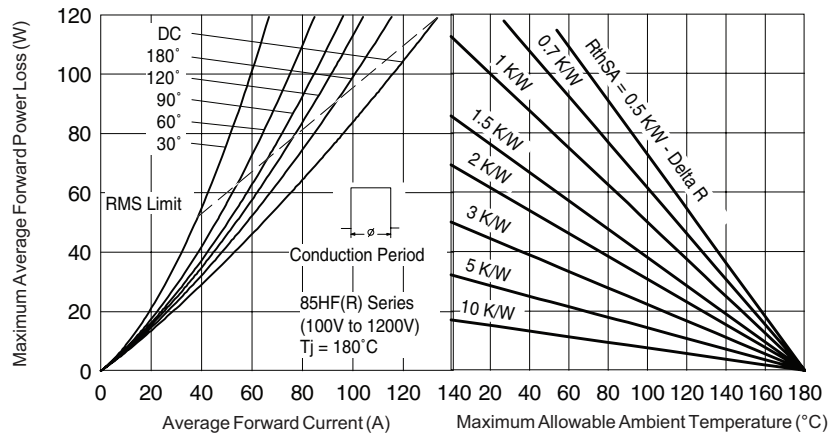


Fig. 6 - Forward Power Loss Characteristics

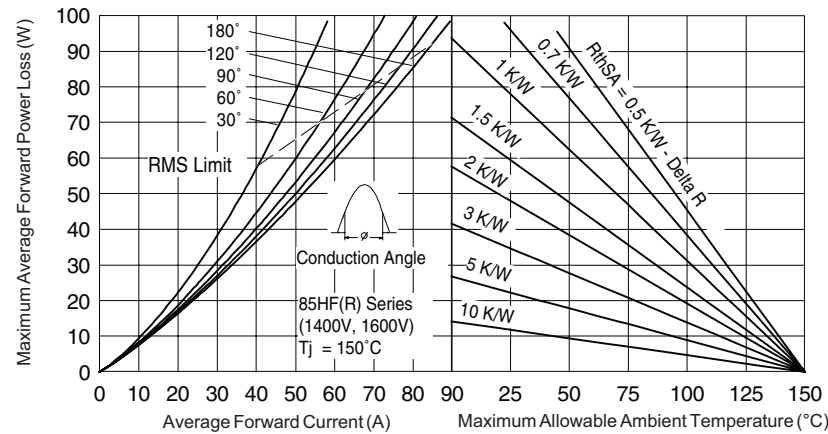


Fig. 7 - Forward Power Loss Characteristics



## Standard Recovery Diodes, Vishay High Power Products (Stud Version), 85 A

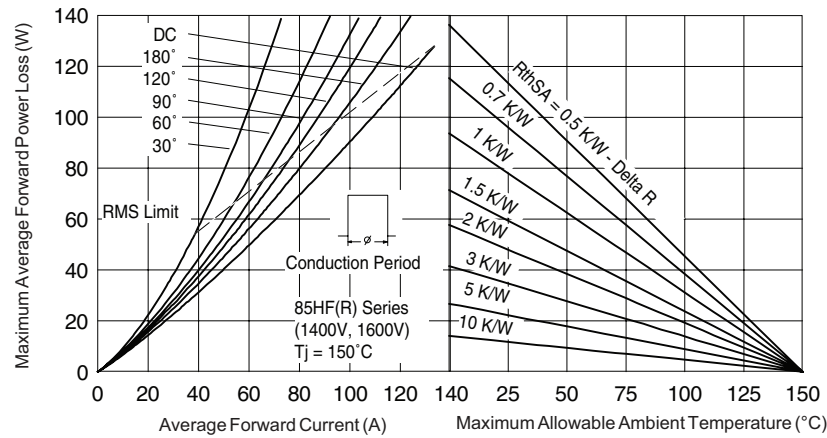


Fig. 8 - Forward Power Loss Characteristics

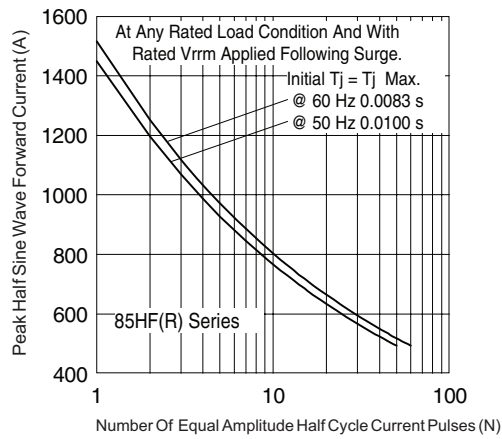


Fig. 9 - Maximum Non-Repetitive Surge Current

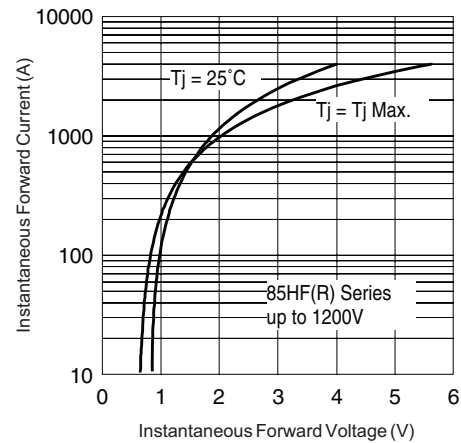


Fig. 11 - Forward Voltage Drop Characteristics (up to 1200 V)

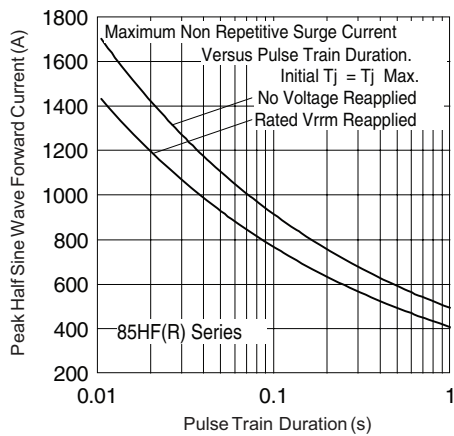


Fig. 10 - Maximum Non-Repetitive Surge Current

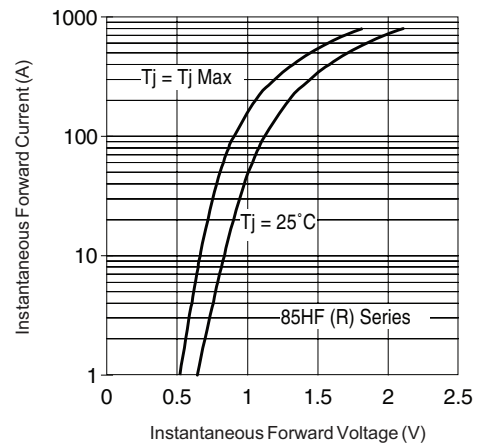


Fig. 12 - Forward Voltage Drop Characteristics (for 1400 V, 1600 V)

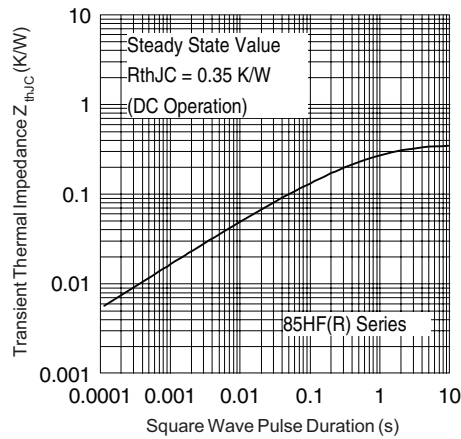


Fig. 13 - Thermal Impedance  $Z_{thJC}$  Characteristics

## ORDERING INFORMATION TABLE

Device code	<b>85</b>	<b>HF</b>	<b>R</b>	<b>160</b>	<b>M</b>
	①	②	③	④	⑤

- 1** - 85 = Standard device  
86 = Not isolated lead  
87 = Isolated lead with silicone sleeve  
(red = Reverse polarity)  
(blue = Normal polarity)  
88 = Type for rotating application
- 2** - HF = Standard diode
- 3** - None = Stud normal polarity (cathode to stud)  
R = Stud reverse polarity (anode to stud)
- 4** - Voltage code x 10 =  $V_{RRM}$  (see Voltage Ratings table)
- 5** - None = Stud base DO-203AB (DO-5) 1/4" 28UNF-2A  
M = Stud base DO-203AB (DO-5) M6 x 1 (not available for 88HF)

### LINKS TO RELATED DOCUMENTS

Dimensions	<a href="http://www.vishay.com/doc?95342">http://www.vishay.com/doc?95342</a>
------------	---



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.