


## Power Rectifier Diodes (T-Modules), 40 A/70 A/85 A/110 A



D-55

**FEATURES**

- Electrically isolated base plate
- Types up to 1200 V<sub>RRM</sub>
- 3500 V<sub>RMS</sub> isolating voltage
- Simplified mechanical designs, rapid assembly
- High surge capability
- Large creepage distances
- UL E78996 approved 
- RoHS compliant
- Designed and qualified for industrial level


**RoHS**  
COMPLIANT

**PRODUCT SUMMARY**

I <sub>F(AV)</sub>	40 to 110 A
--------------------	-------------

**DESCRIPTION**

These series of T-modules use standard recovery power rectifier diodes. The semiconductors are electrically isolated from the metal base, allowing common heatsink and compact assembly to be built.

Applications include power supplies, battery charges, welders, motor controls and general industrial current rectification.

**MAJOR RATINGS AND CHARACTERISTICS**

SYMBOL	CHARACTERISTICS	T40HF	T70HF	T85HF	T110HF	UNITS
I <sub>F(AV)</sub>		40	70	85	110	A
	T <sub>C</sub>	85	85	85	85	°C
I <sub>F(RMS)</sub>		63	110	134	173	A
I <sub>FSM</sub>	50 Hz	570	1200	1700	2000	A
	60 Hz	600	1250	1800	2100	
I <sup>2</sup> t	50 Hz	1630	7100	14 500	20 500	A <sup>2</sup> s
	60 Hz	1500	6450	13 500	18 600	
I <sup>2</sup> √t		16 300	70 700	148 700	204 300	A <sup>2</sup> √s
V <sub>RRM</sub>		100 to 1200				V
T <sub>J</sub>		- 40 to 150				°C

## ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	$V_{RRM}$ , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	$V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	$I_{RRM}$ MAXIMUM AT $T_J = 25\text{ }^\circ\text{C}$ $\mu\text{A}$
T40HF.. T70HF.. T85HF.. T110HF..	10	100	150	100
	20	200	300	
	40	400	500	
	60	600	700	
	80	800	900	
	100	1000	1100	
	120	1200	1300	

FORWARD CONDUCTION										
PARAMETER	SYMBOL	TEST CONDITIONS			T40HF	T70HF	T85HF	T110HF	UNITS	
Maximum average forward current at case temperature	$I_{F(AV)}$	180° conduction, half sine wave			40	70	85	110	A	
					85	85	85	85	°C	
Maximum RMS forward current	$I_{F(RMS)}$				63	110	134	173	A	
Maximum peak, one-cycle forward, non-repetitive surge current	$I_{FSM}$	t = 10 ms	No voltage reapplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	570	1200	1700	2000	A	
		t = 8.3 ms			600	1250	1800	2100		
		t = 10 ms	100% $V_{RRM}$ reapplied		480	1000	1450	1700		
		t = 8.3 ms			500	1050	1500	1780		
Maximum $I^2t$ for fusing	$I^2t$	t = 10 ms	No voltage reapplied			1630	7100	14 500	20 500	A <sup>2</sup> s
		t = 8.3 ms				1500	6450	13 500	18 600	
		t = 10 ms	100% $V_{RRM}$ reapplied			1150	5000	10 500	14 500	
		t = 8.3 ms				1050	4570	9600	13 200	
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	t = 0.1 to 10 ms, no voltage reapplied				16 300	70 700	148 700	204 300	A <sup>2</sup> $\sqrt{s}$
Low level value of threshold voltage	$V_{F(TO)1}$	(16.7% $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$ ), $T_J$ maximum				0.66	0.76	0.68	0.68	V
High level value of threshold voltage	$V_{F(TO)2}$	(I > $\pi \times I_{F(AV)}$ ), $T_J$ maximum				0.84	0.95	0.90	0.86	
Low level value of forward slope resistance	$r_{f1}$	(16.7% $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$ ), $T_J$ maximum				4.3	2.4	1.76	1.56	m $\Omega$
High level value of forward slope resistance	$r_{f2}$	(I > $\pi \times I_{F(AV)}$ ), $T_J$ maximum			3.1	1.7	1.08	1.12		
Maximum forward voltage drop	$V_{FM}$	$I_{FM} = \pi \times I_{F(AV)}$ , $T_J = 25\text{ }^\circ\text{C}$ , $t_p = 400\text{ }\mu\text{s}$ square pulse Average power = $V_{F(TO)} \times I_{F(AV)} + r_f \times (I_{F(RMS)})^2$			1.30	1.35	1.27	1.35	V	



<b>BLOCKING</b>							
PARAMETER	SYMBOL	TEST CONDITIONS	T40HF	T70HF	T85HF	T110HF	UNITS
Maximum peak reverse leakage current	$I_{RRM}$	$T_J = 150\text{ }^\circ\text{C}$	15	15	20	20	mA
RMS isolation voltage	$V_{ISOL}$	50 Hz, circuit to base, all terminals shorted $T_J = 25\text{ }^\circ\text{C}$ , $t = 1\text{ s}$	3500	3500	3500	3500	V

<b>THERMAL AND MECHANICAL SPECIFICATIONS</b>							
PARAMETER	SYMBOL	TEST CONDITIONS	T40HF	T70HF	T85HF	T110HF	UNITS
Maximum junction operating and storage temperature range	$T_J, T_{Stg}$		- 40 to 150				$^\circ\text{C}$
Maximum thermal resistance, junction to case per junction	$R_{thJC}$	DC operation	1.36	0.69	0.62	0.47	K/W
Maximum thermal resistance, case to heatsink	$R_{thCS}$	Mounting surface smooth, flat and greased	0.2				
Mounting torque, $\pm 10\%$ to heatsink terminals		Non-lubricated threads	M3.5 mounting screws <sup>(1)</sup>	1.3 $\pm$ 10 %			Nm
			M5 screw terminals	3 $\pm$ 10 %			
Approximate weight		See dimensions - link at the end of datasheet	54				g
Case style		T-module	D-55				

**Note**

<sup>(1)</sup> A mounting compound is recommended and the torque should be rechecked after a period of about 3 hours to allow for the spread of the compound

<b><math>\Delta R</math> CONDUCTION PER JUNCTION</b>											
DEVICES	SINUSOIDAL CONDUCTION AT $T_J$ MAXIMUM					RECTANGULAR CONDUCTION AT $T_J$ MAXIMUM					UNITS
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
T40HF	0.12	0.14	0.18	0.27	0.46	0.09	0.15	0.20	0.28	0.46	K/W
T70HF	0.09	0.11	0.14	0.20	0.35	0.07	0.11	0.15	0.21	0.35	
T85HF	0.08	0.09	0.12	0.18	0.31	0.06	0.10	0.13	0.19	0.31	
T110HF	0.05	0.07	0.09	0.14	0.23	0.05	0.08	0.10	0.15	0.24	

**Note**

• Table shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC

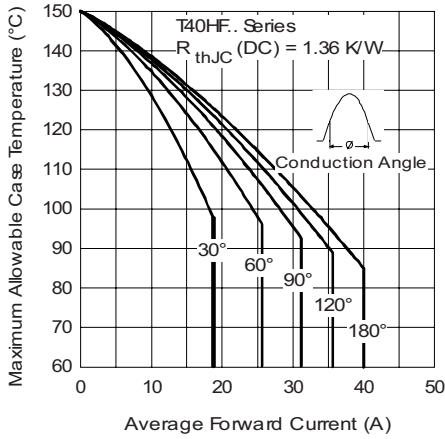


Fig. 1 - Current Ratings Characteristics

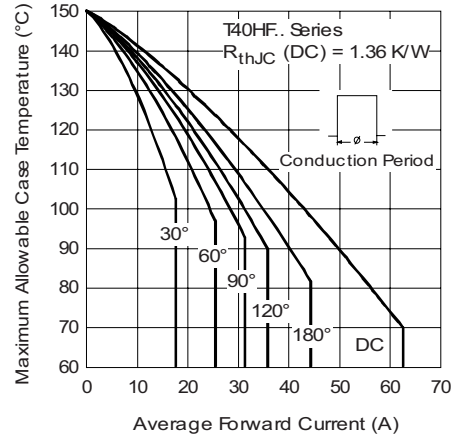


Fig. 2 - Current Ratings Characteristics

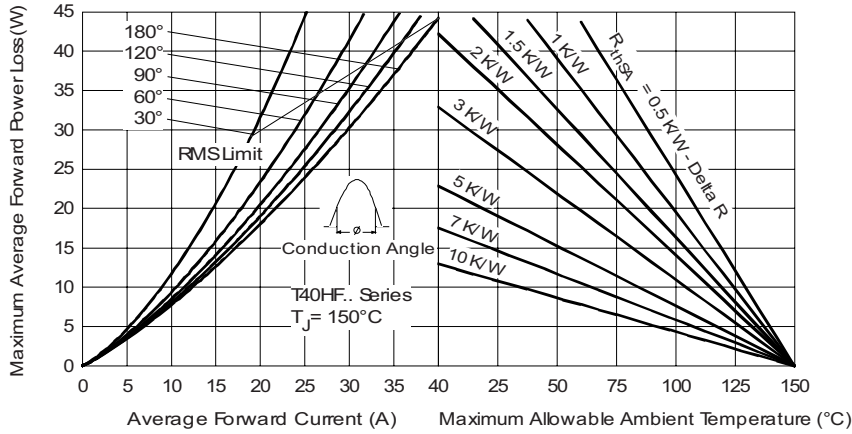


Fig. 3 - Forward Power Loss Characteristics

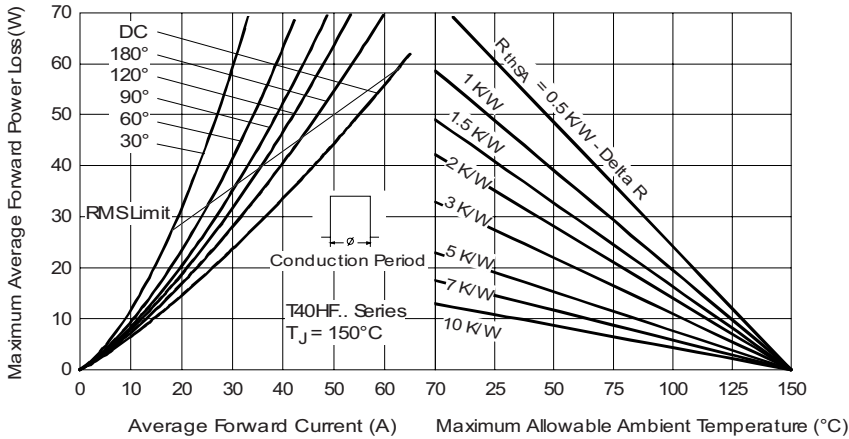


Fig. 4 - Forward Power Loss Characteristics

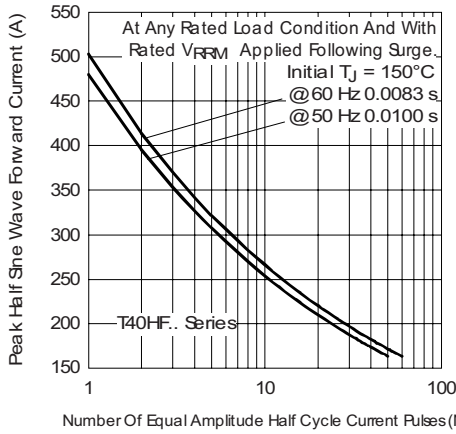


Fig. 5 - Maximum Non-Repetitive Surge Current

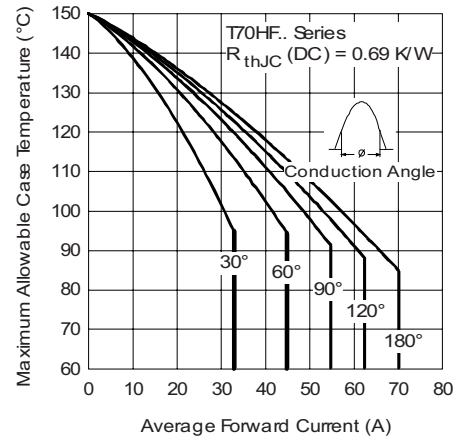


Fig. 7 - Current Ratings Characteristics

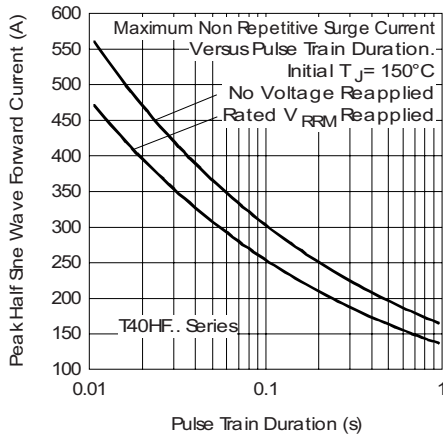


Fig. 6 - Maximum Non-Repetitive Surge Current

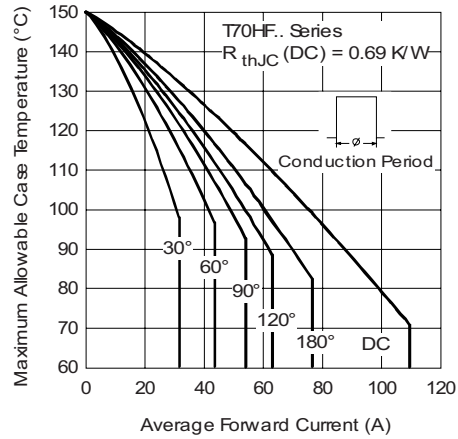


Fig. 8 - Current Ratings Characteristics

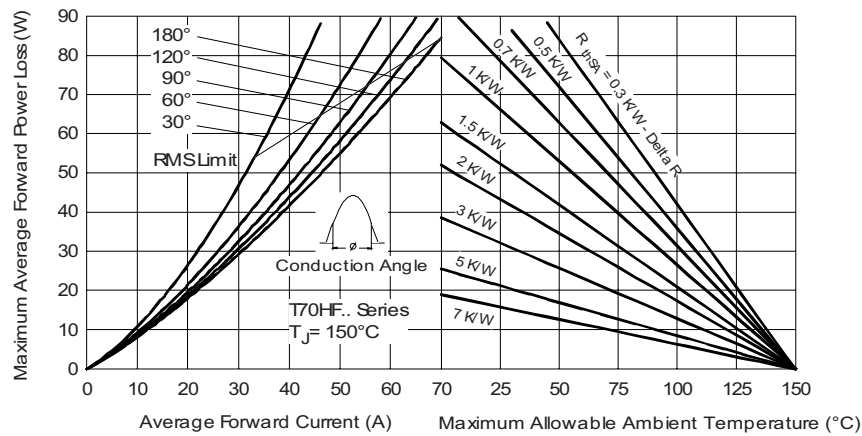


Fig. 9 - Forward Power Loss Characteristics

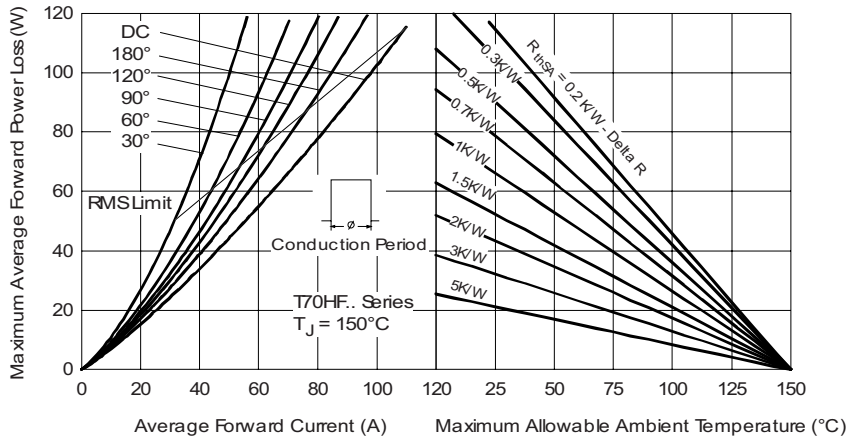


Fig. 10 - Forward Power Loss Characteristics

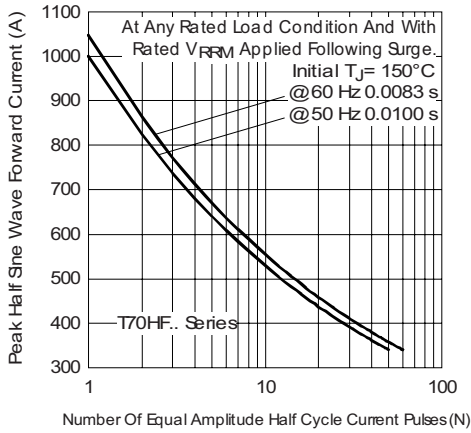


Fig. 11 - Maximum Non-Repetitive Surge Current

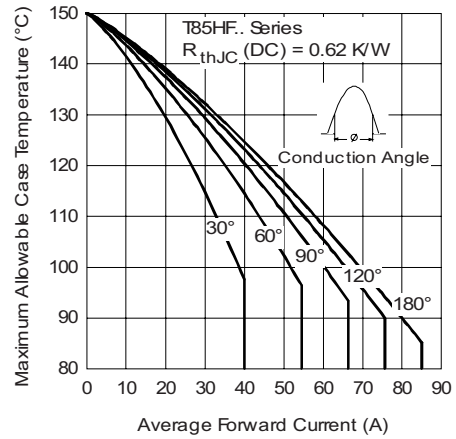


Fig. 13 - Current Ratings Characteristics

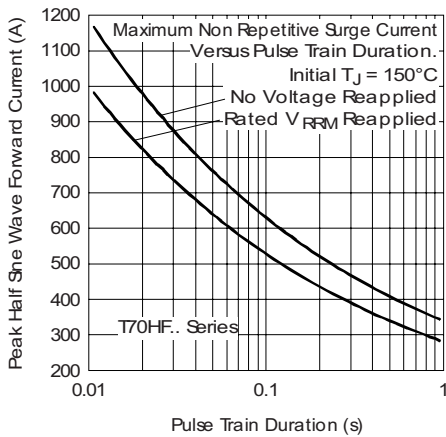


Fig. 12 - Maximum Non-Repetitive Surge Current

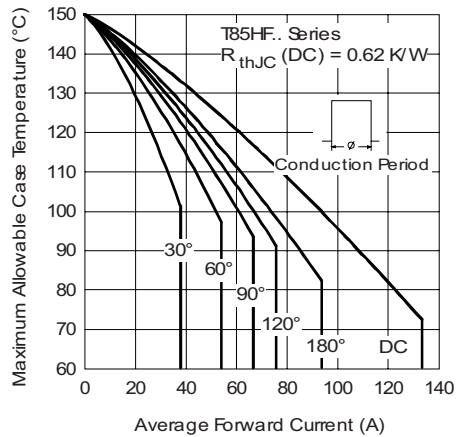


Fig. 14 - Current Ratings Characteristics



Power Rectifier Diodes (T-Modules), Vishay High Power Products  
40 A/70 A/85 A/110 A

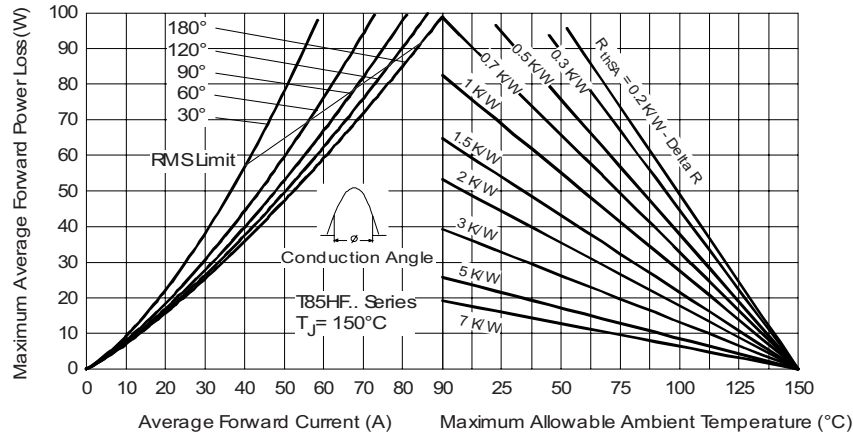


Fig. 15 - Forward Power Loss Characteristics

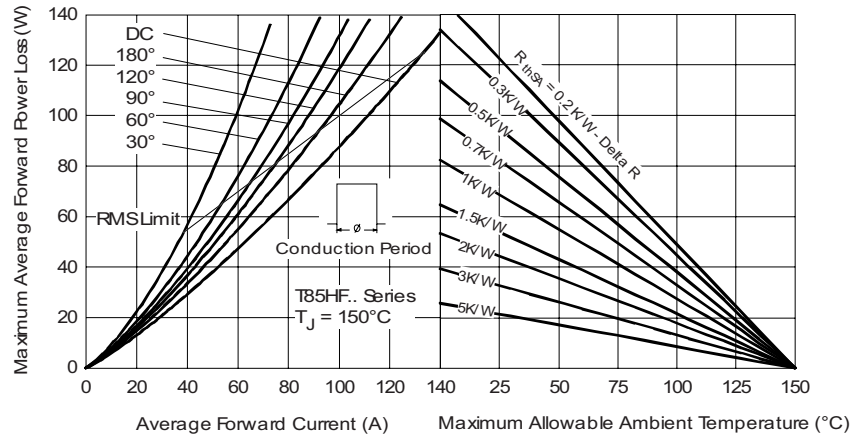


Fig. 16 - Forward Power Loss Characteristics

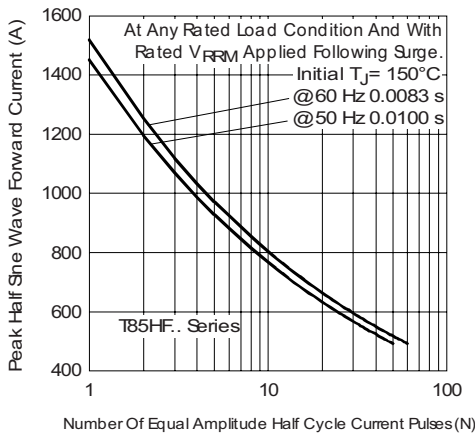


Fig. 17 - Maximum Non-Repetitive Surge Current

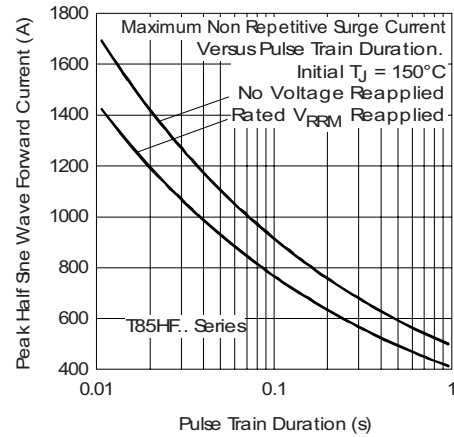


Fig. 18 - Maximum Non-Repetitive Surge Current

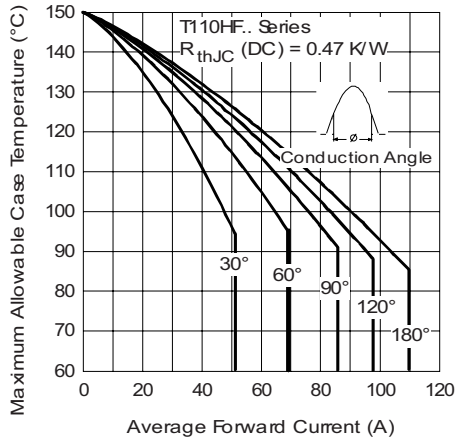


Fig. 19 - Current Ratings Characteristics

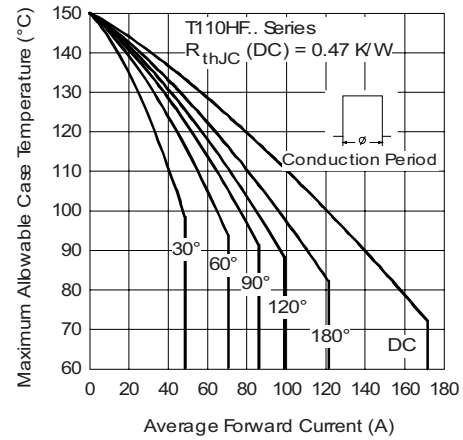


Fig. 20 - Current Ratings Characteristics

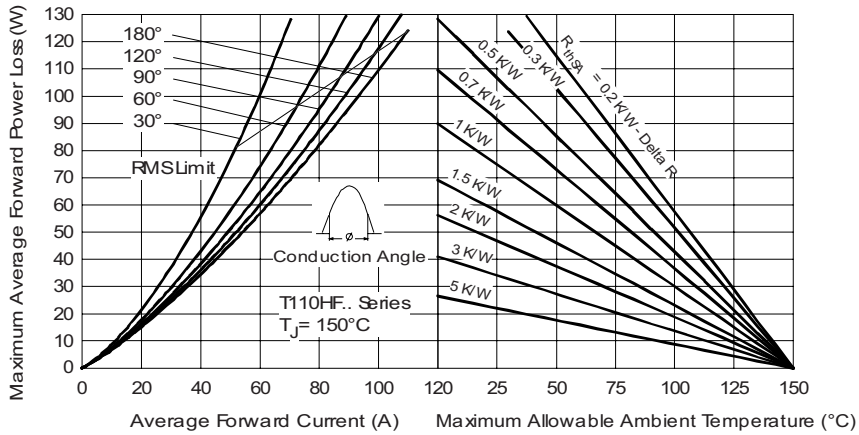


Fig. 21 - Forward Power Loss Characteristics

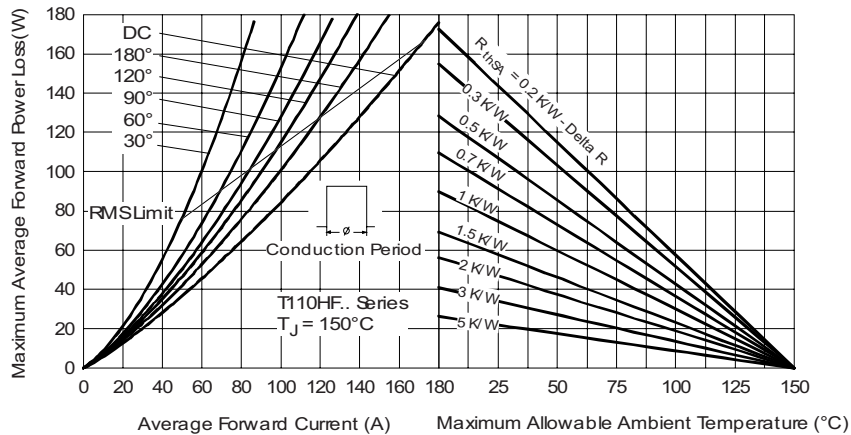


Fig. 22 - Forward Power Loss Characteristics



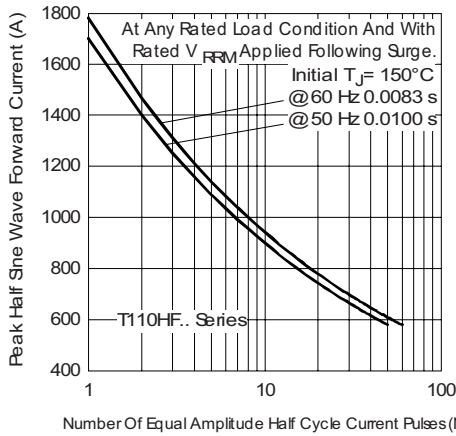


Fig. 23 - Maximum Non-Repetitive Surge Current

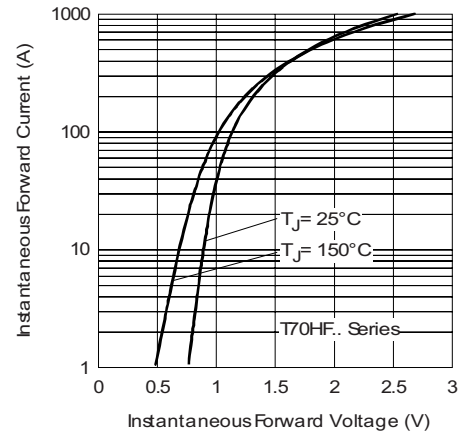


Fig. 26 - Forward Voltage Drop Characteristics

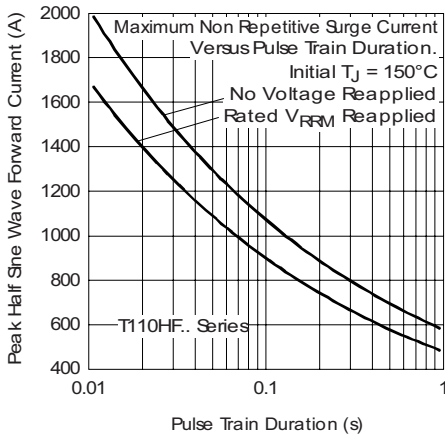


Fig. 24 - Maximum Non-Repetitive Surge Current

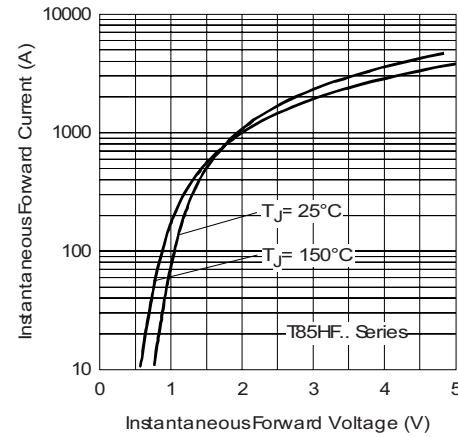


Fig. 27 - Forward Voltage Drop Characteristics

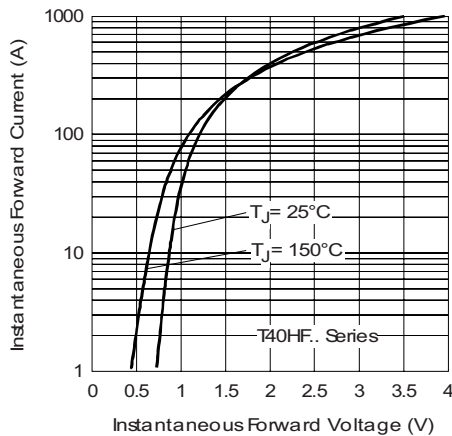


Fig. 25 - Forward Voltage Drop Characteristics

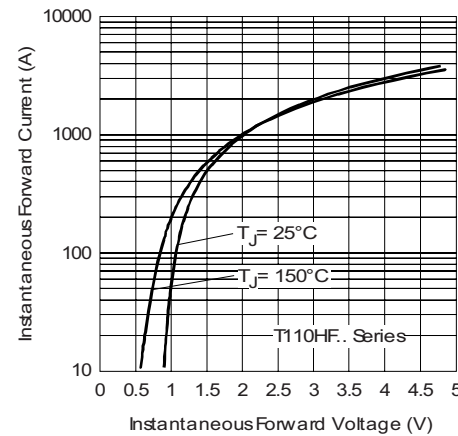


Fig. 28 - Forward Voltage Drop Characteristics

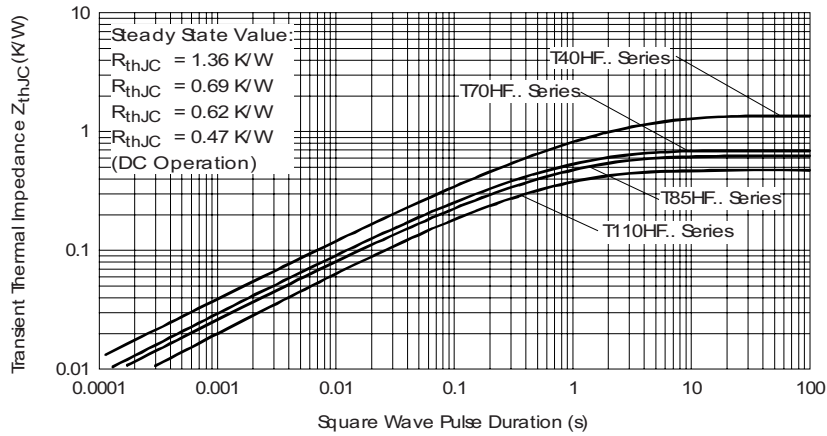


Fig. 29 - Thermal Impedance  $Z_{thJC}$  Characteristics

## ORDERING INFORMATION TABLE

Device code	<b>T</b>	<b>110</b>	<b>HF</b>	<b>120</b>
	①	②	③	④

- 1** - Module type
- 2** - Current rating
- 3** - Circuit configuration
- 4** - Voltage code x 10 =  $V_{RRM}$

## CIRCUIT CONFIGURATION



LINKS TO RELATED DOCUMENTS	
Dimensions	<a href="http://www.vishay.com/doc?95313">http://www.vishay.com/doc?95313</a>



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.