


## Fast Recovery Diodes, 40/70/85 A (T-Modules)



D-55

### FEATURES

- Fast recovery time characteristics
- Electrically isolated base plate
- 3500 V<sub>RMS</sub> isolating voltage
- Standard JEDEC package
- Simplified mechanical designs, rapid assembly
- Large creepage distances
- UL E78996 approved 
- RoHS compliant
- Designed and qualified for industrial level


**RoHS**  
COMPLIANT

### PRODUCT SUMMARY

 $I_{F(AV)}$ 

40/70/85 A

### DESCRIPTION

The series of T-modules uses fast recovery power diodes in a single diode configuration. The semiconductors are electrically isolated from the metal base, allowing common heatsink and compact assemblies to be built.

These single diode modules can be used in conjunction with the thyristor modules as a freewheel diode. Application includes self-commutated inverters, DC choppers, motor control, inductive heating and electronic welders. These modules are intended for those applications where very fast recovery characteristics are required and for general power switching applications.

### MAJOR RATINGS AND CHARACTERISTICS

SYMBOL	CHARACTERISTICS	T40HFL	T70HFL	T85HFL	UNITS
$I_{F(AV)}$		40	70	85	A
$I_{F(RMS)}$		63	110	133	A
$I_{FSM}$	50 Hz	475	830	1300	A
	60 Hz	500	870	1370	
$I^2t$	50 Hz	1130	3460	8550	A <sup>2</sup> s
	60 Hz	1030	3160	7810	
$V_{RRM}$	Range	100 to 1000			V
$t_{rr}$	Range	200 to 1000			ns
$T_J$	Range	- 40 to 125			°C



## ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS					
TYPE NUMBER	VOLTAGE CODE	t <sub>rr</sub> CODE	V <sub>RRM</sub> , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V <sub>RSM</sub> , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I <sub>RRM</sub> MAXIMUM AT T <sub>J</sub> = 25 °C μA
T40HFL.. T70HFL.. T85HFL..	10	S02, S05, S10	100	150	100
	20	S02, S05, S10	200	300	
	40	S02, S05, S10	400	500	
	60	S02, S05, S10	600	700	
	80	S05, S10	800	900	
	100	S05, S10	1000	1100	

FORWARD CONDUCTION								
PARAMETER	SYMBOL	TEST CONDITIONS		T40HFL	T70HFL	T85HFL	UNITS	
Maximum average forward current at case temperature	I <sub>F(AV)</sub>	180° conduction, half sine wave		40	70	85	A	
				70			°C	
Maximum RMS forward current	I <sub>F(RMS)</sub>			63	110	133	A	
Maximum peak, one-cycle forward, non-repetitive surge current	I <sub>FSM</sub>	t = 10 ms	No voltage reapplied	Sinusoidal half wave, initial T <sub>J</sub> = T <sub>J</sub> maximum	475	830	1300	A
		t = 8.3 ms	No voltage reapplied		500	870	1370	
		t = 10 ms	100 % V <sub>RRM</sub> reapplied		400	700	1100	
		t = 8.3 ms	100 % V <sub>RRM</sub> reapplied		420	730	1150	
Maximum I <sup>2</sup> t for fusing	I <sup>2</sup> t	t = 10 ms	No voltage reapplied	Sinusoidal half wave, initial T <sub>J</sub> = T <sub>J</sub> maximum	1130	3460	8550	A <sup>2</sup> s
		t = 8.3 ms	No voltage reapplied		1030	3160	7810	
		t = 10 ms	100 % V <sub>RRM</sub> reapplied		800	2450	6050	
		t = 8.3 ms	100 % V <sub>RRM</sub> reapplied		730	2230	5520	
Maximum I <sup>2</sup> √t for fusing	I <sup>2</sup> √t	t = 0.1 to 10 ms, no voltage reapplied		11 300	34 600	85 500	A <sup>2</sup> √s	
Low level value of threshold voltage	V <sub>F(TO)1</sub>	T <sub>J</sub> = 25 °C, (16.7 % × π × I <sub>F(AV)</sub> ) < I < π × I <sub>F(AV)</sub>		0.82	0.87	0.84	V	
High level value of threshold voltage	V <sub>F(TO)2</sub>	T <sub>J</sub> = 25 °C, (I > π × I <sub>F(AV)</sub> )		0.84	0.90	0.86		
Low level value of forward slope resistance	r <sub>f1</sub>	T <sub>J</sub> = 25 °C, (16.7 % × π × I <sub>F(AV)</sub> ) < I < π × I <sub>F(AV)</sub>		7.0	2.77	2.15	mΩ	
High level value of forward slope resistance	r <sub>f2</sub>	T <sub>J</sub> = 25 °C, (I > π × I <sub>F(AV)</sub> )		6.8	2.67	2.07		
Maximum forward voltage drop	V <sub>FM</sub>	I <sub>FM</sub> = π × I <sub>F(AV)</sub> , T <sub>J</sub> = 25 °C, t <sub>p</sub> = 400 μs square wave Average power = V <sub>F(TO)</sub> × I <sub>F(AV)</sub> + r <sub>f</sub> × (I <sub>F(RMS)</sub> ) <sup>2</sup>		1.60	1.73	1.55	V	



REVERSE RECOVERY CHARACTERISTICS												
PARAMETER	SYMBOL	TEST CONDITIONS (1)	T40HFL			T70HFL			T85HFL			UNITS
			S02	S05	S10	S02	S05	S10	S02	S05	S10	
Maximum reverse recovery time	$t_{rr}$	$T_J = 25\text{ }^\circ\text{C}$ , $-di_F/dt = 100\text{ A}/\mu\text{s}$ $I_F = 1\text{ A}$ to $V_R = 30\text{ V}$	70	110	270	70	110	270	80	120	290	ns
		$T_J = 25\text{ }^\circ\text{C}$ , $-di_F/dt = 25\text{ A}/\mu\text{s}$ $I_{FM} = \pi \times \text{rated } I_{F(AV)}$ , $V_R = -30\text{ V}$	200	500	1000	200	500	1000	200	500	1000	
Maximum reverse recovery charge	$Q_{rr}$	$T_J = 25\text{ }^\circ\text{C}$ , $-di_F/dt = 100\text{ A}/\mu\text{s}$ $I_F = 1\text{ A}$ to $V_R = 30\text{ V}$	0.25	0.4	1.35	0.25	0.4	1.35	0.3	0.6	1.6	$\mu\text{C}$
		$T_J = 25\text{ }^\circ\text{C}$ , $-di_F/dt = 25\text{ A}/\mu\text{s}$ $I_{FM} = \pi \times \text{rated } I_{F(AV)}$ , $V_R = -30\text{ V}$	0.55	2.0	8.0	0.6	2.1	8.5	0.8	3.5	1.5	

**Note**

(1) Tested on LEM 300 A diodemeter tester

BLOCKING						
PARAMETER	SYMBOL	TEST CONDITIONS	T40HFL	T70HFL	T85HFL	UNITS
Maximum peak reverse leakage current	$I_{RRM}$	$T_J = 125\text{ }^\circ\text{C}$	20			mA
RMS isolation voltage	$V_{ISOL}$	50 Hz, circuit to base, all terminals shorted, $T_J = 25\text{ }^\circ\text{C}$ , $t = 1\text{ s}$	3500			V

THERMAL AND MECHANICAL SPECIFICATIONS						
PARAMETER	SYMBOL	TEST CONDITIONS	T40HFL	T70HFL	T85HFL	UNITS
Junction operating temperature range	$T_J$		- 40 to 125			$^\circ\text{C}$
Storage temperature range	$T_{Stg}$		- 40 to 150			
Maximum internal thermal resistance, junction to case per module	$R_{thJC}$	DC operation	0.85	0.53	0.46	K/W
Thermal resistance, case to heatsink per module	$R_{thCS}$	Mounting surface, flat, smooth and greased	0.2			
Mounting torque $\pm 10\%$	base to heatsink	M3.5 mounting screws (1) Non-lubricated threads	1.3 $\pm 10\%$			Nm
	busbar to terminal	M5 screws terminals Non-lubricated threads	3 $\pm 10\%$			
Approximate weight		See dimensions - link at the end of datasheet	54			g
			19			oz.
Case style		T-module	D-55			

**Note**

(1) A mounting compound is recommended and the torque should be rechecked after a period of about 3 hours to allow for the spread of the compound

$\Delta R$ CONDUCTION											
DEVICES	SINUSOIDAL CONDUCTION AT $T_J$ MAXIMUM					RECTANGULAR CONDUCTION AT $T_J$ MAXIMUM					UNITS
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
T40HFL	0.06	0.08	0.10	0.14	0.24	0.05	0.08	0.10	0.15	0.24	K/W
T70HFL	0.05	0.06	0.08	0.11	0.19	0.04	0.06	0.08	0.12	0.19	
T85HFL	0.04	0.05	0.06	0.09	0.15	0.03	0.05	0.07	0.09	0.015	

**Note**

• The table above shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC

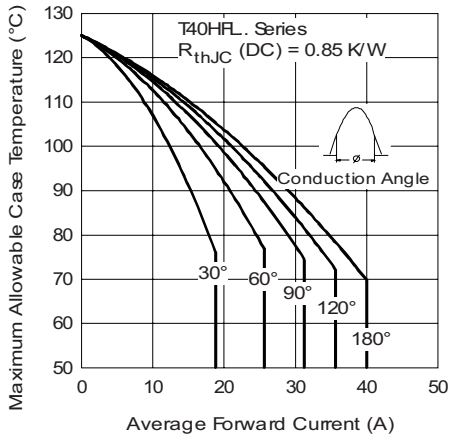


Fig. 1 - Current Ratings Characteristics

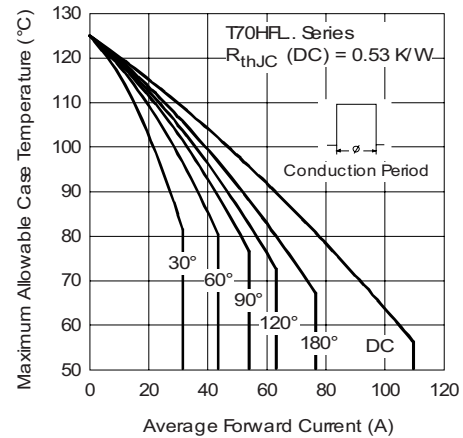


Fig. 4 - Current Ratings Characteristics

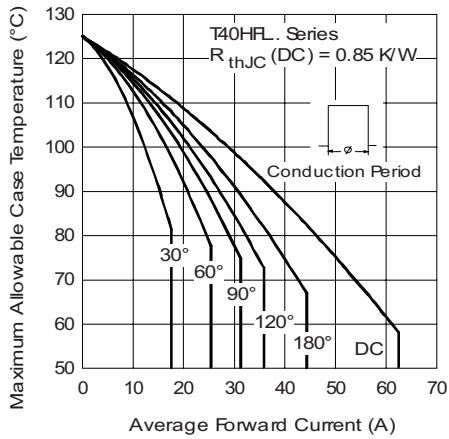


Fig. 2 - Current Ratings Characteristics

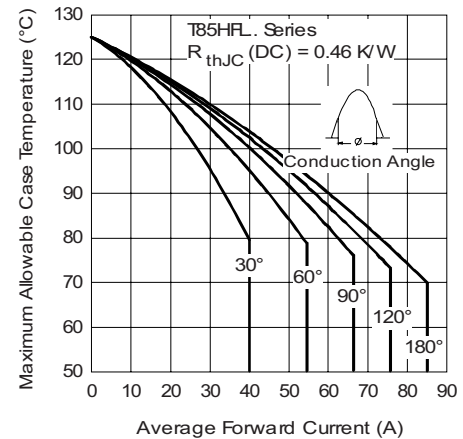


Fig. 5 - Current Ratings Characteristics

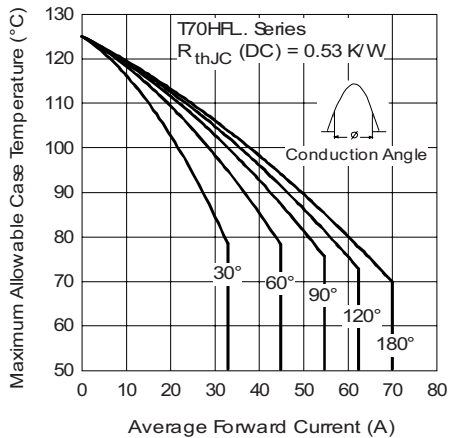


Fig. 3 - Current Ratings Characteristics

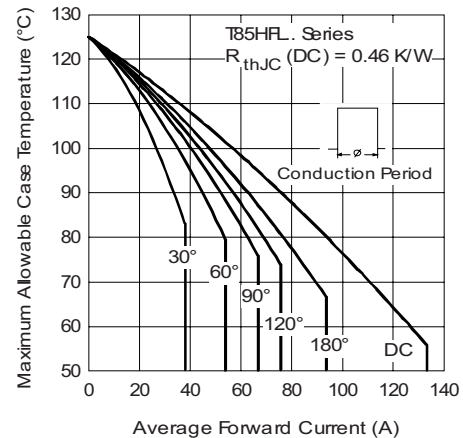


Fig. 6 - Current Ratings Characteristics



## Fast Recovery Diodes, Vishay High Power Products 40/70/85 A (T-Modules)

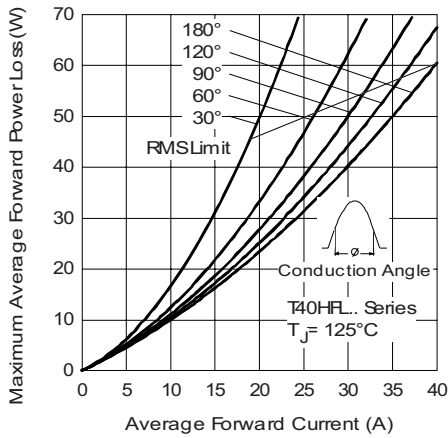


Fig. 7 - Forward Power Loss Characteristics

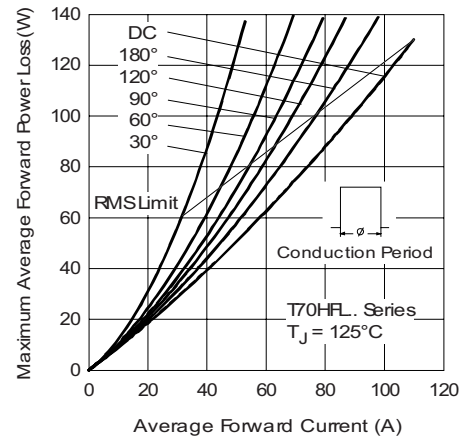


Fig. 10 - Forward Power Loss Characteristics

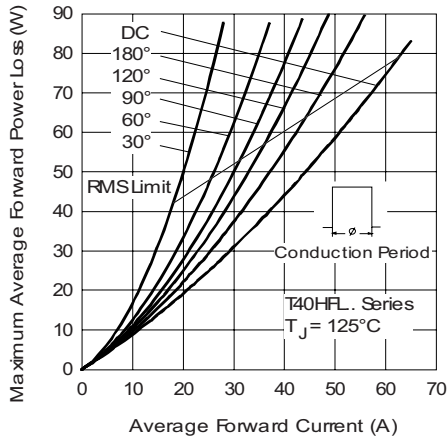


Fig. 8 - Forward Power Loss Characteristics

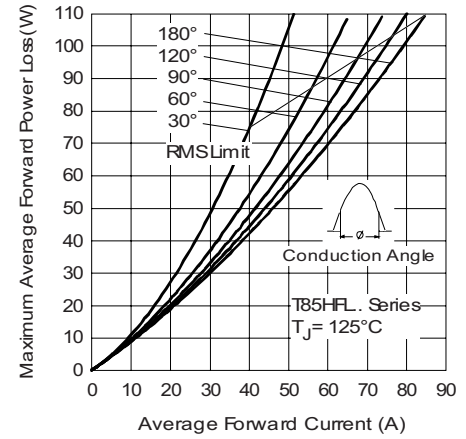


Fig. 11 - Forward Power Loss Characteristics

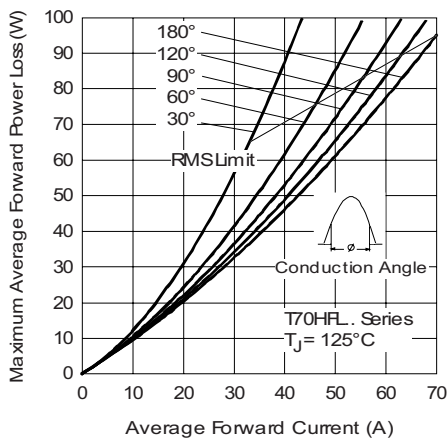


Fig. 9 - Forward Power Loss Characteristics

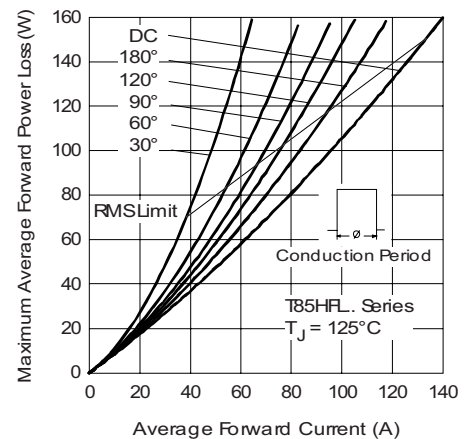


Fig. 12 - Forward Power Loss Characteristics

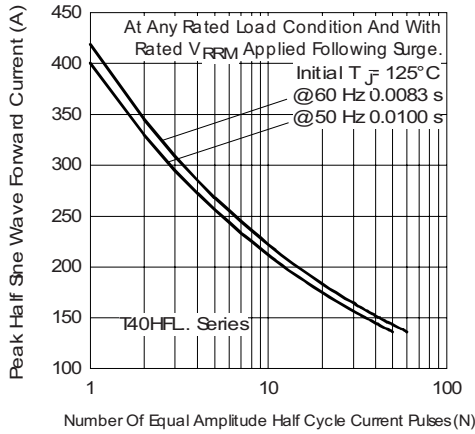


Fig. 13 - Maximum Non-Repetitive Surge Current

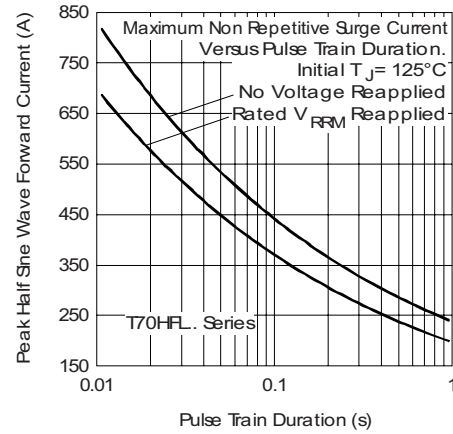


Fig. 16 - Maximum Non-Repetitive Surge Current

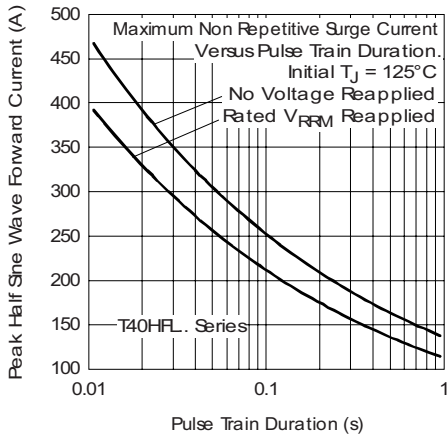


Fig. 14 - Maximum Non-Repetitive Surge Current

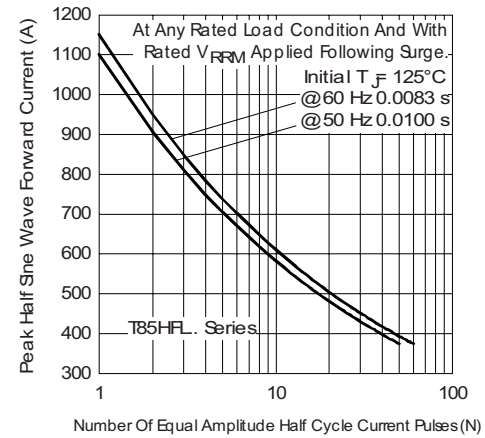


Fig. 17 - Maximum Non-Repetitive Surge Current

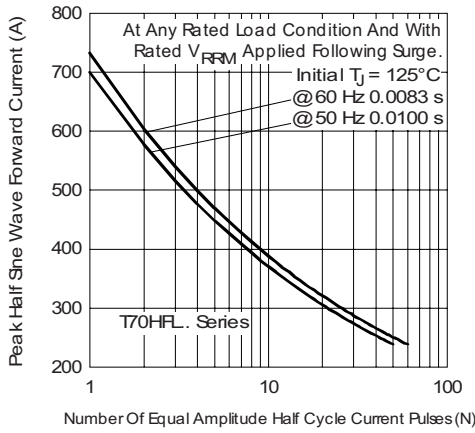


Fig. 15 - Maximum Non-Repetitive Surge Current

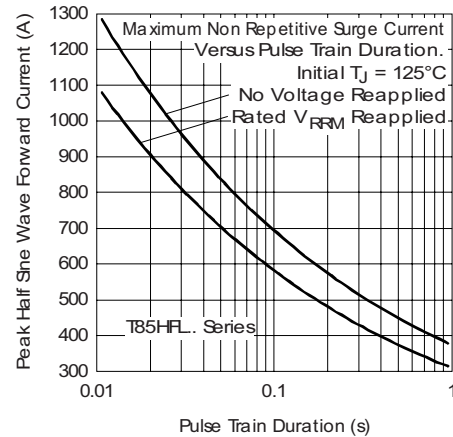


Fig. 18 - Maximum Non-Repetitive Surge Current



## Fast Recovery Diodes, Vishay High Power Products 40/70/85 A (T-Modules)

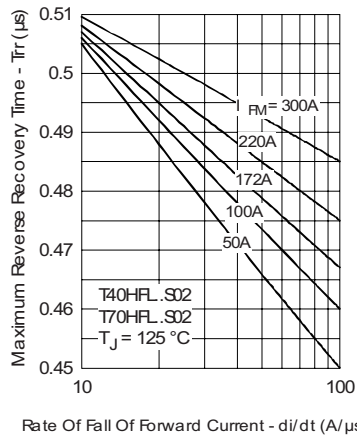


Fig. 19 - Recovery Time Characteristics

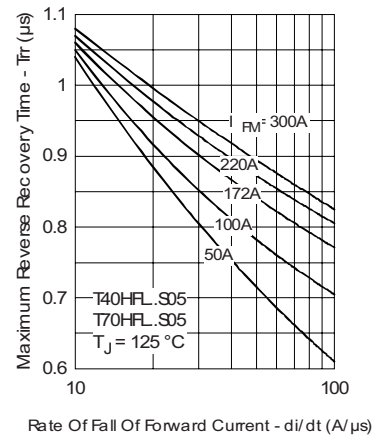


Fig. 22 - Recovery Time Characteristics

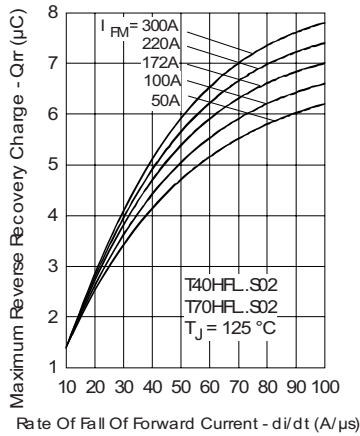


Fig. 20 - Recovery Charge Characteristics

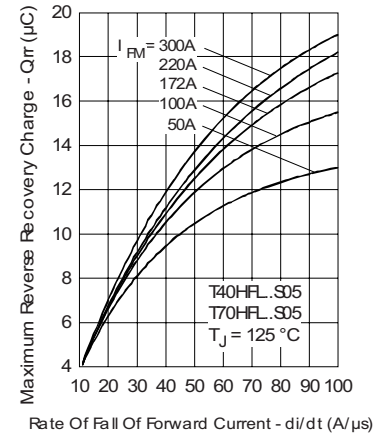


Fig. 23 - Recovery Charge Characteristics

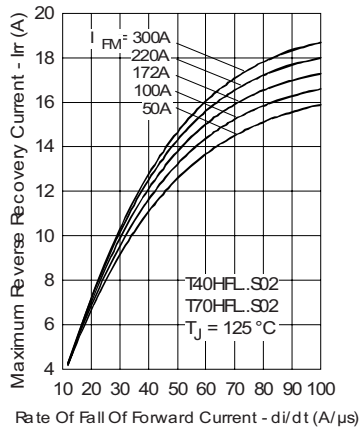


Fig. 21 - Recovery Current Characteristics

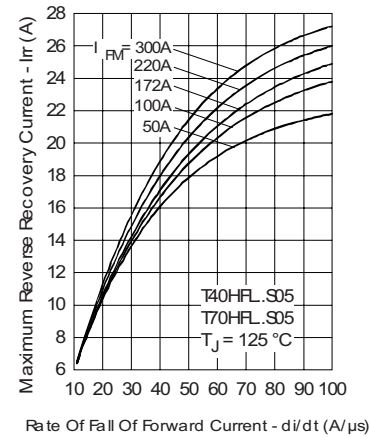


Fig. 24 - Recovery Current Characteristics

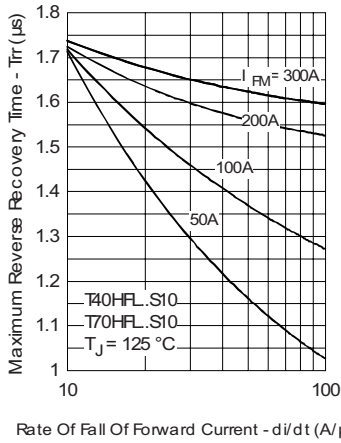


Fig. 25 - Recovery Time Characteristics

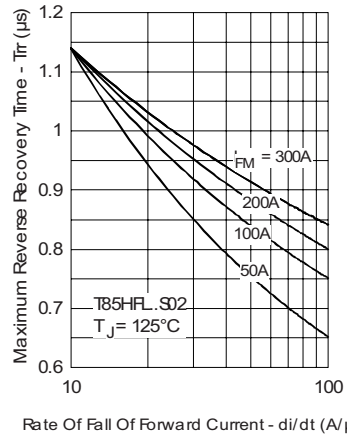


Fig. 28 - Recovery Time Characteristics

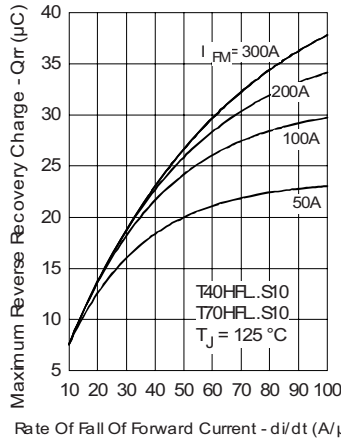


Fig. 26 - Recovery Charge Characteristics

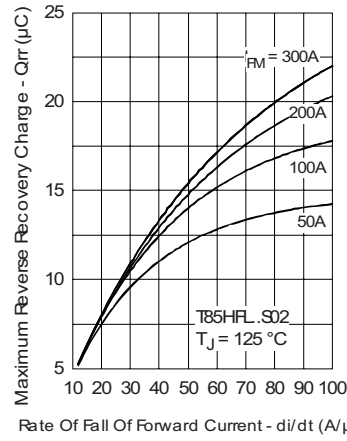


Fig. 29 - Recovery Charge Characteristics

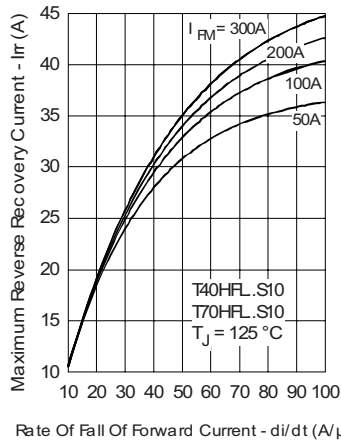


Fig. 27 - Recovery Current Characteristics

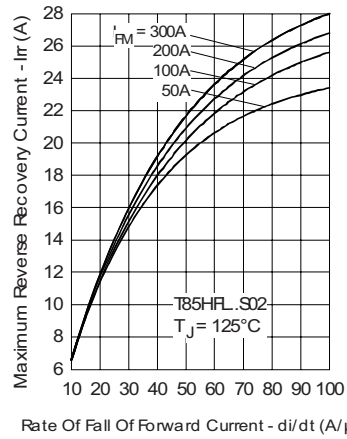


Fig. 30 - Recovery Current Characteristics



## Fast Recovery Diodes, Vishay High Power Products 40/70/85 A (T-Modules)

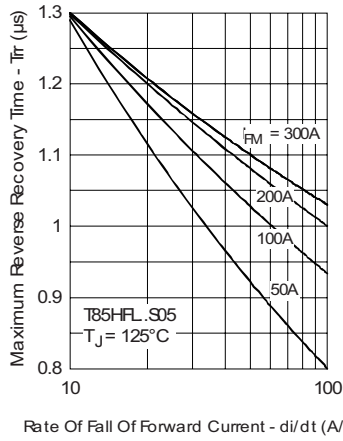


Fig. 31 - Recovery Time Characteristics

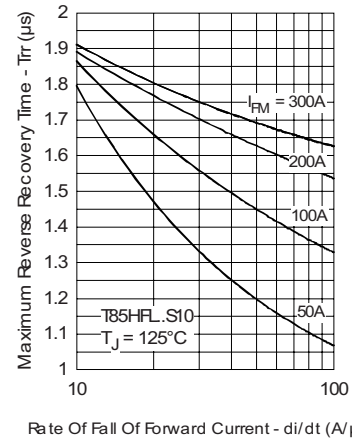


Fig. 34 - Recovery Time Characteristics

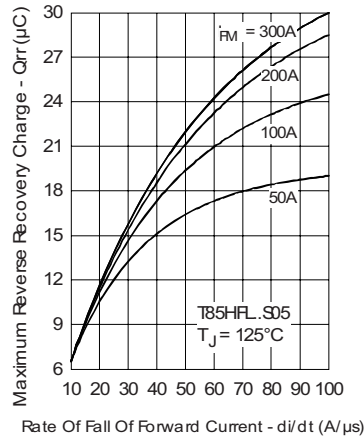


Fig. 32 - Recovery Charge Characteristics

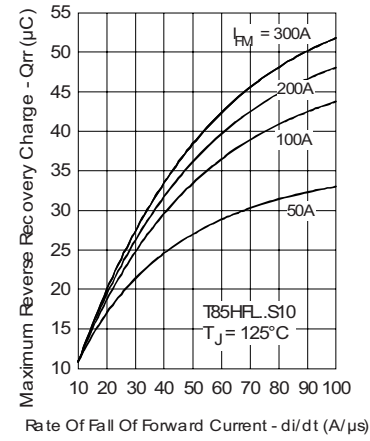


Fig. 35 - Recovery Charge Characteristics

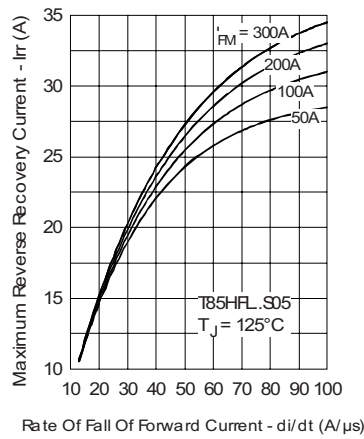


Fig. 33 - Recovery Current Characteristics

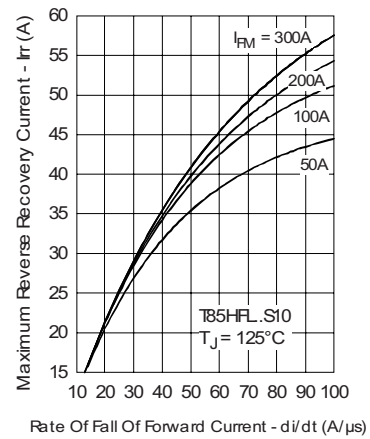


Fig. 36 - Recovery Current Characteristics

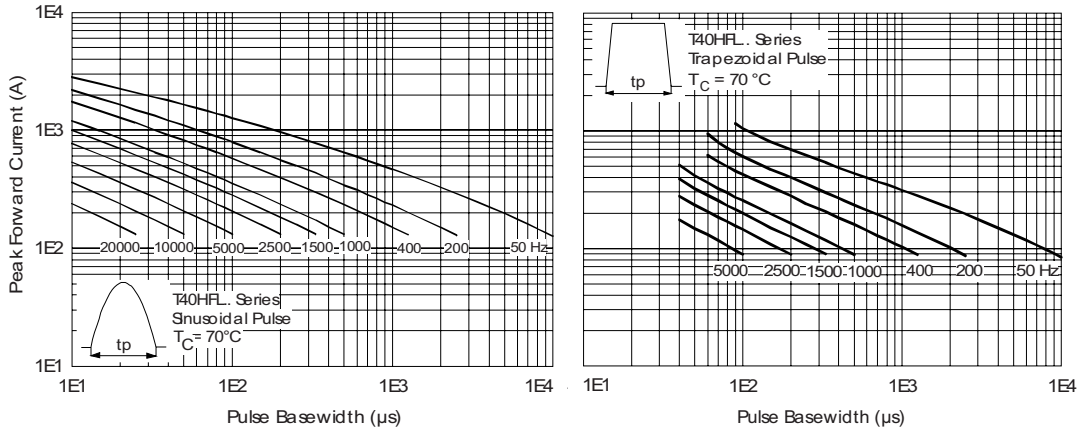


Fig. 37 - Frequency Characteristics

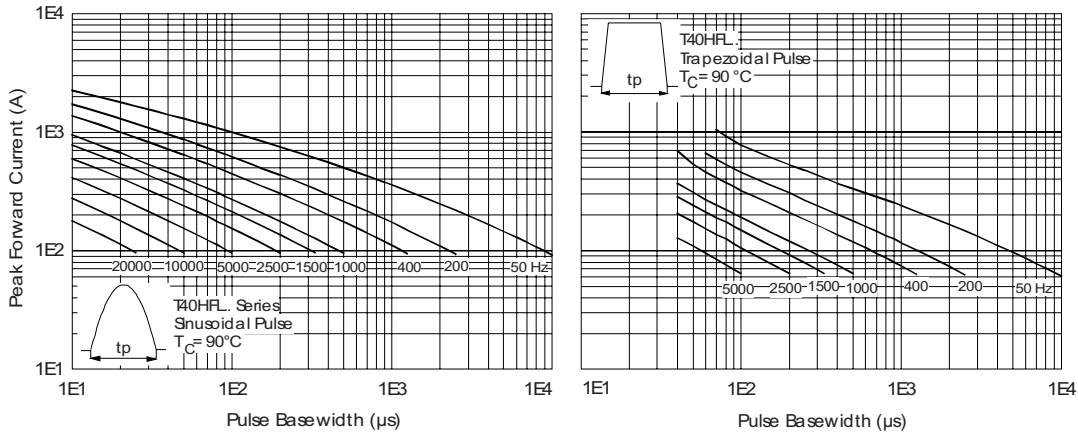


Fig. 38 - Frequency Characteristics

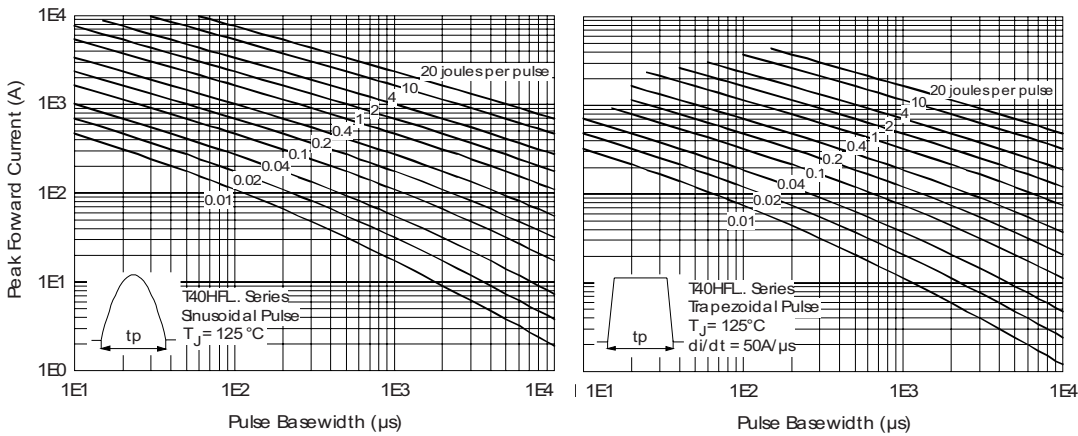


Fig. 39 - Maximum Forward Energy Power Loss Characteristics

## Fast Recovery Diodes, Vishay High Power Products 40/70/85 A (T-Modules)

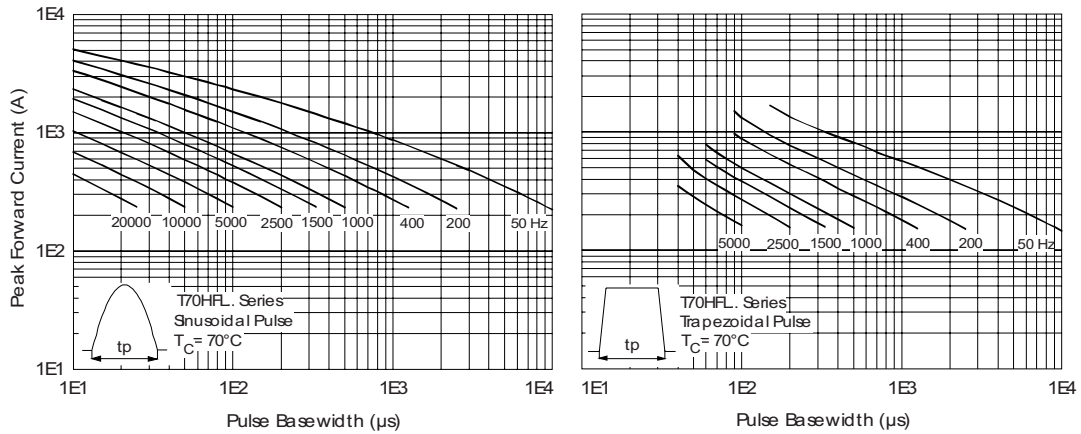


Fig. 40 - Frequency Characteristics

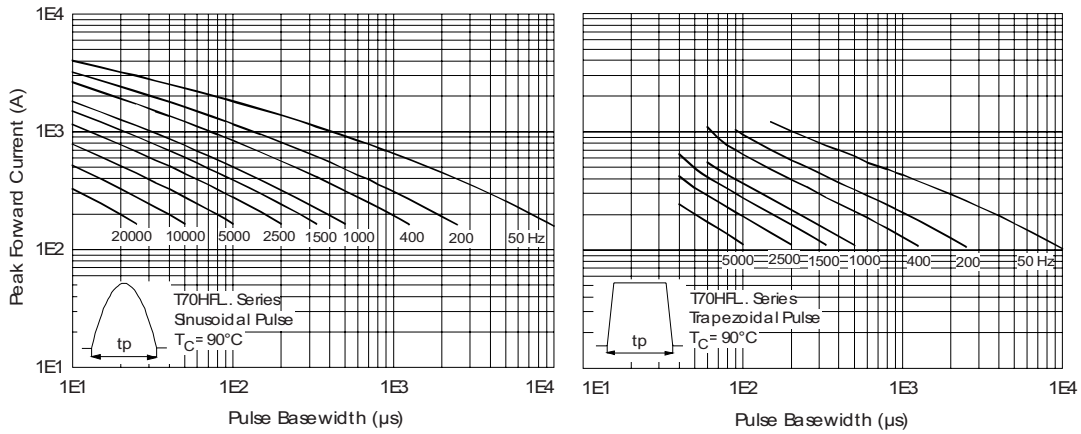


Fig. 41 - Frequency Characteristics

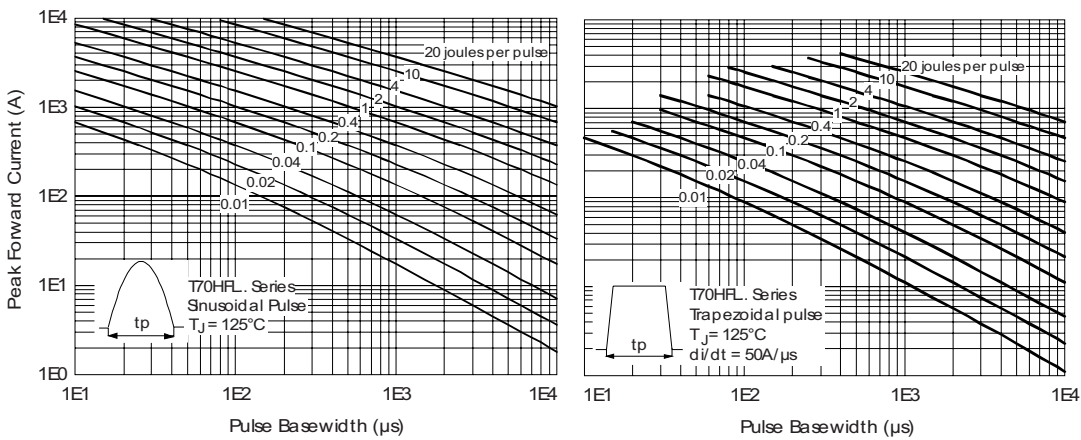


Fig. 42 - Maximum Forward Energy Power Loss Characteristics

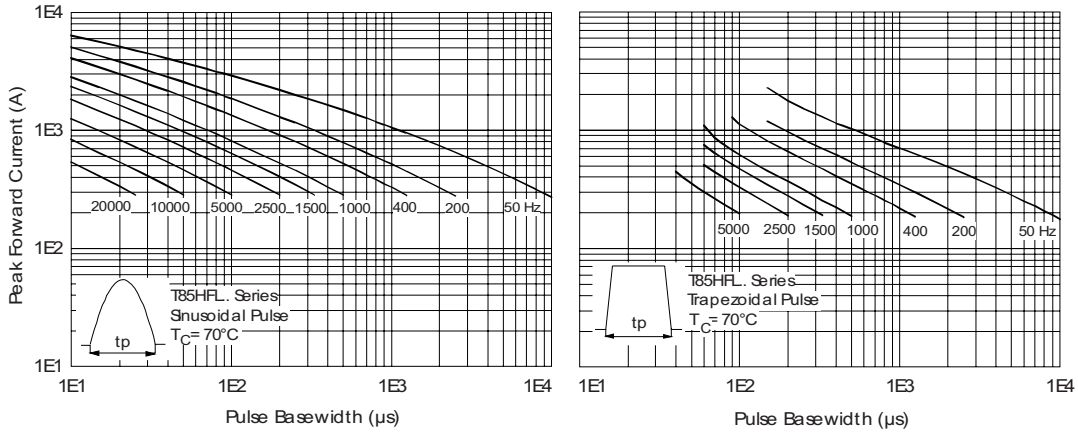


Fig. 43 - Frequency Characteristics

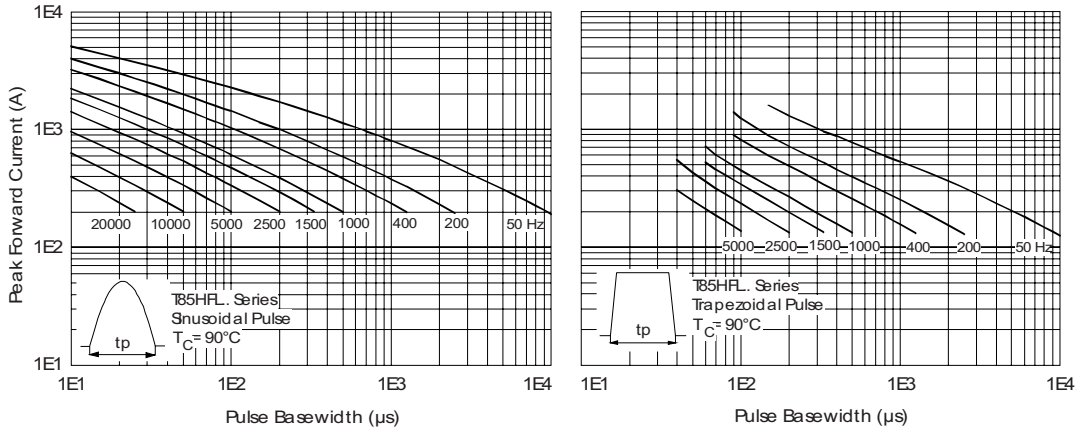


Fig. 44 - Frequency Characteristics

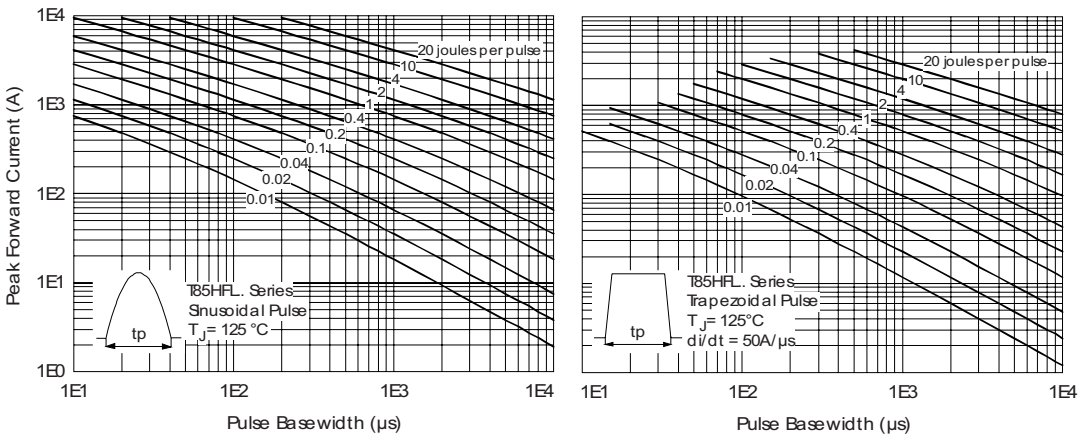


Fig. 45 - Maximum Forward Energy Power Loss Characteristics

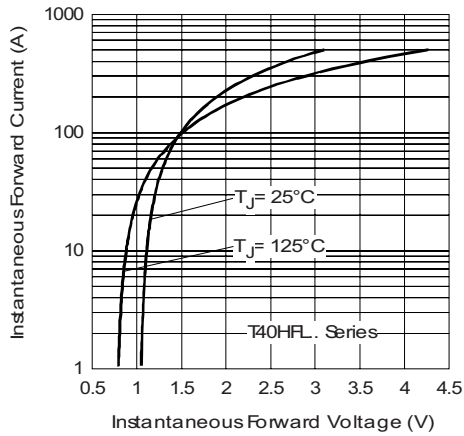


Fig. 46 - Forward Voltage Drop Characteristics

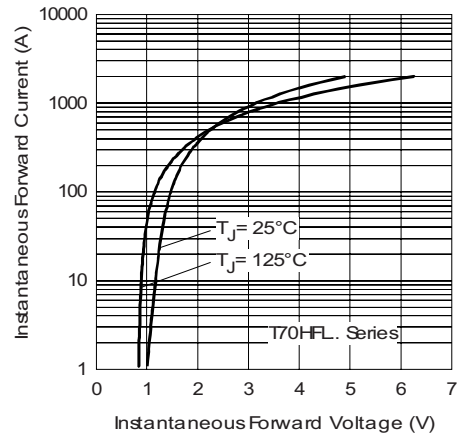


Fig. 47 - Forward Voltage Drop Characteristics

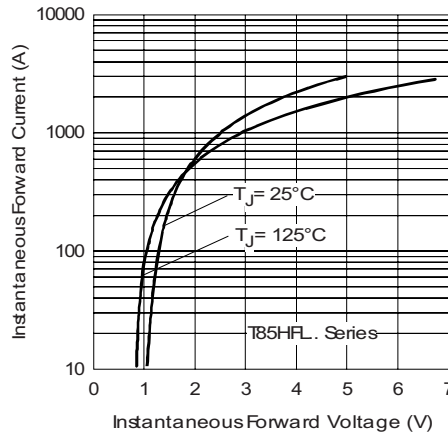


Fig. 48 - Forward Voltage Drop Characteristics

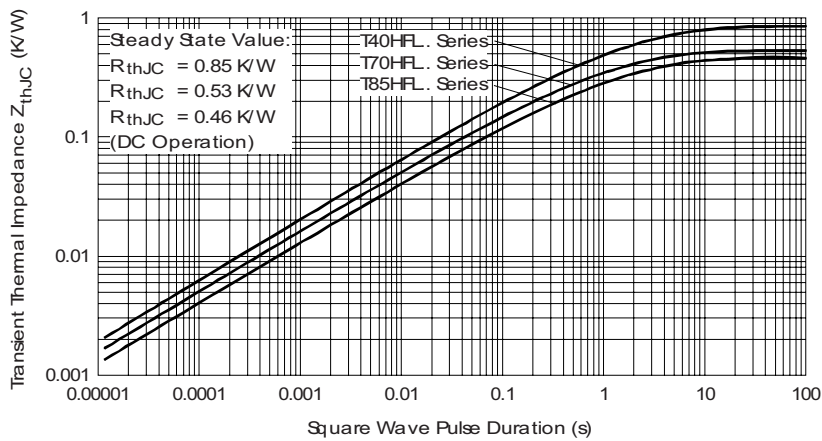


Fig. 49 - Thermal Impedance  $Z_{thJC}$  Characteristics

# T..HFL Series

Vishay High Power Products

Fast Recovery Diodes,  
40/70/85 A (T-Modules)



## ORDERING INFORMATION TABLE

Device code	T	40	HFL	100	S10
	①	②	③	④	⑤
<b>1</b>	-	Module type			
<b>2</b>	-	Current rating			
<b>3</b>	-	Fast recovery diode			
<b>4</b>	-	Voltage code x 10 = $V_{RRM}$			
<b>5</b>	-	$t_{rr}$ code			

40 = 40 A (average)
70 = 70 A (average)
85 = 85 A (average)

S02 = 200 ns
S05 = 500 ns
S10 = 1000 ns

## CIRCUIT CONFIGURATION



LINKS TO RELATED DOCUMENTS	
Dimensions	<a href="http://www.vishay.com/doc?95313">http://www.vishay.com/doc?95313</a>



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.