


Features

- Epitaxial Planar Die Construction
- Complementary PNP Type Available (MMST2907A)
- Lead Free/RoHS Compliant (Note 2)
- "Green" Device (Note 3 and 4)

Mechanical Data

- Case: SOT-323
- Case Material: Molded Plastic, "Green" Molding Compound, Note 4. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Terminal Connections: See Diagram
- Marking Information: K3P - See Page 4
- Ordering & Date Code Information: See Page 4
- Weight: 0.006 grams (approximate)

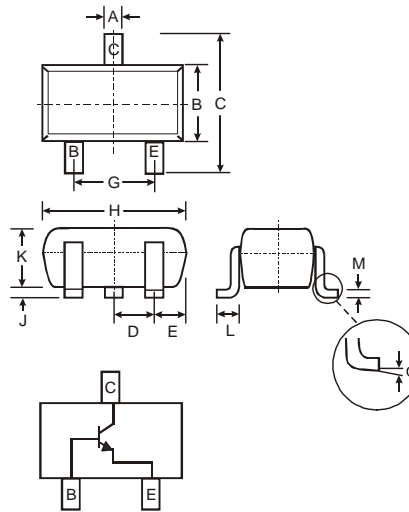

| SOT-323 | | |
|----------------------|--------------|------|
| Dim | Min | Max |
| A | 0.25 | 0.40 |
| B | 1.15 | 1.35 |
| C | 2.00 | 2.20 |
| D | 0.65 Nominal | |
| E | 0.30 | 0.40 |
| G | 1.20 | 1.40 |
| H | 1.80 | 2.20 |
| J | 0.0 | 0.10 |
| K | 0.90 | 1.00 |
| L | 0.25 | 0.40 |
| M | 0.10 | 0.18 |
| α | 0° | 8° |
| All Dimensions in mm | | |

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|-----------------|-------------|--------------------|
| Collector-Base Voltage | V_{CB0} | 75 | V |
| Collector-Emitter Voltage | V_{CEO} | 40 | V |
| Emitter-Base Voltage | V_{EBO} | 6.0 | V |
| Collector Current – Continuous (Note 1) | I_C | 600 | mA |
| Power Dissipation (Note 1) | P_d | 200 | mW |
| Thermal Resistance, Junction to Ambient (Note 1) | $R_{\theta JA}$ | 625 | $^\circ\text{C/W}$ |
| Operating and Storage Temperature Range | T_j, T_{STG} | -55 to +150 | $^\circ\text{C}$ |

- Notes:
1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
 2. No purposefully added lead.
 3. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
 4. Product manufactured with Date Code 0627 (week 27, 2006) and newer are built with Green Molding Compound. Product manufactured prior to Date Code 0627 are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

Electrical Characteristics @T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Min | Max | Unit | Test Condition | |
|--------------------------------------|----------------------|--|------------|------|--|--|
| OFF CHARACTERISTICS (Note 5) | | | | | | |
| Collector-Base Breakdown Voltage | V _{(BR)CBO} | 75 | — | V | I _C = 10μA, I _E = 0 | |
| Collector-Emitter Breakdown Voltage | V _{(BR)CEO} | 40 | — | V | I _C = 10mA, I _B = 0 | |
| Emitter-Base Breakdown Voltage | V _{(BR)EBO} | 6.0 | — | V | I _E = 10μA, I _C = 0 | |
| Collector Cutoff Current | I _{CBO} | — | 10 | nA | V _{CB} = 60V, I _E = 0 | |
| Collector Cutoff Current | I _{CEX} | — | 10 | nA | V _{CE} = 60V, V _{EB(OFF)} = 3.0V | |
| Emitter Cutoff Current | I _{EBO} | — | 10 | nA | V _{EB} = 3.0V, I _C = 0 | |
| Base Cutoff Current | I _{BL} | — | 20 | nA | V _{CE} = 60V, V _{EB(OFF)} = 3.0V | |
| ON CHARACTERISTICS (Note 5) | | | | | | |
| DC Current Gain | h _{FE} | 35 | — | — | I _C = 100μA, V _{CE} = 10V | |
| | | 50 | — | | | I _C = 1.0mA, V _{CE} = 10V |
| | | 75 | — | | | I _C = 10mA, V _{CE} = 10V |
| | | 100 | 300 | | | I _C = 150mA, V _{CE} = 10V |
| | | 40 | — | | | I _C = 500mA, V _{CE} = 10V |
| | | 50 | — | | | I _C = 10mA, V _{CE} = 10V, T _A = -55°C |
| 35 | — | I _C = 150mA, V _{CE} = 1.0V | | | | |
| Collector-Emitter Saturation Voltage | V _{CE(SAT)} | — | 0.3 1.0 | V | I _C = 150mA, I _B = 15mA I _C = 500mA, I _B = 50mA | |
| Base-Emitter Saturation Voltage | V _{BE(SAT)} | 0.6 | 1.2 2.0 | V | I _C = 150mA, I _B = 15mA I _C = 500mA, I _B = 50mA | |
| SMALL SIGNAL CHARACTERISTICS | | | | | | |
| Output Capacitance | C _{obo} | — | 8 | pF | V _{CB} = 10V, f = 1.0MHz, I _E = 0 | |
| Input Capacitance | C _{ibo} | — | 25 | pF | V _{EB} = 0.5V, f = 1.0MHz, I _C = 0 | |
| Current Gain-Bandwidth Product | f _T | 300 | — | MHz | V _{CE} = 20V, I _C = 20mA, f = 1.0MHz | |
| Noise Figure | NF | — | 4.0 | dB | V _{CE} = 10V, I _C = 100μA, R _S = 1.0kΩ, f = 1.0kHz | |
| SWITCHING CHARACTERISTICS | | | | | | |
| Delay Time | t _d | — | 10 | ns | V _{CC} = 30V, I _C = 150mA, | |
| Rise Time | t _r | — | 25 | ns | V _{BE(OFF)} = -0.5V, I _{B1} = 15mA | |
| Storage Time | t _s | — | 225 | ns | V _{CC} = 30V, I _C = 150mA, | |
| Fall Time | t _f | — | 60 | ns | I _{B1} = I _{B2} = 15mA | |

5. Short duration pulse test used to minimize self-heating effect.

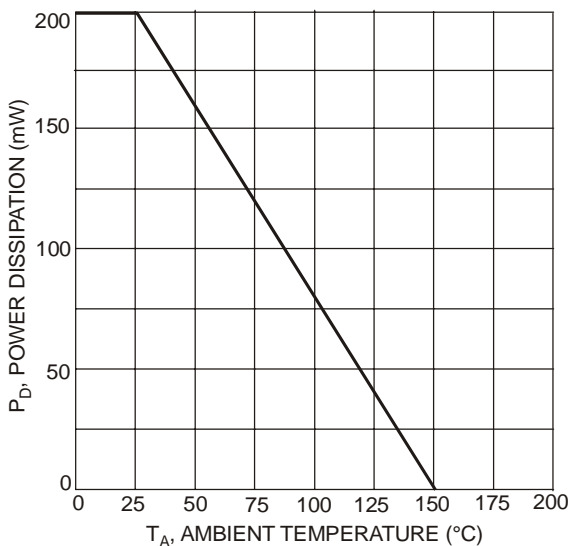


Fig. 1 Max Power Dissipation vs. Ambient Temperature

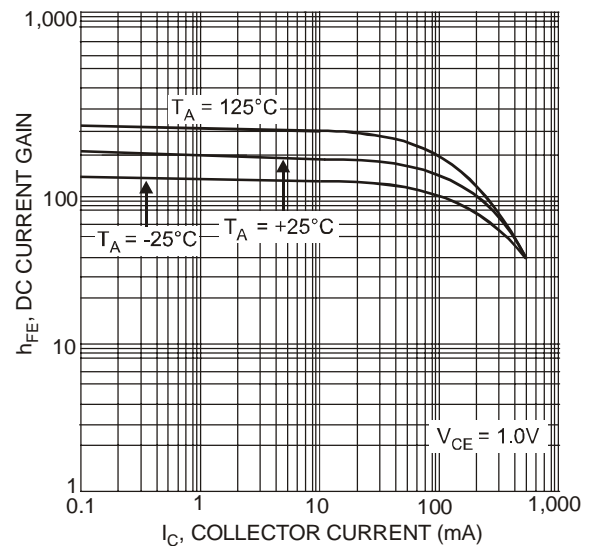


Fig. 2 Typical DC Current Gain vs. Collector Current

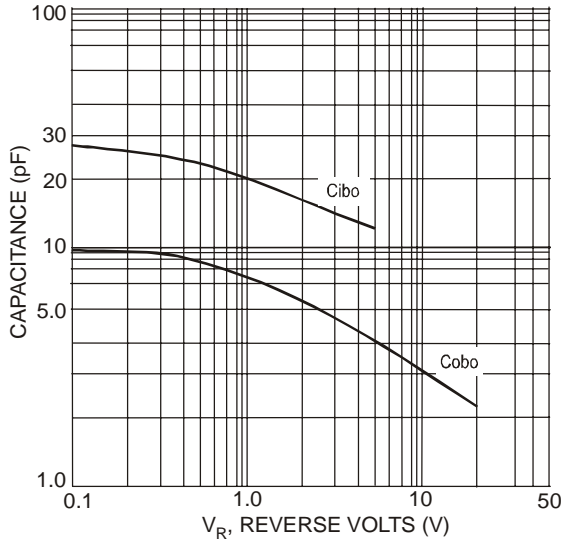


Fig. 3 Typical Capacitance Characteristics

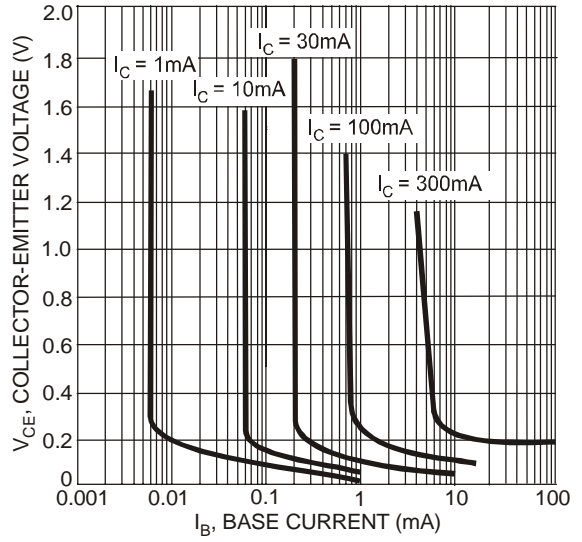


Fig. 4 Typical Collector Saturation Region

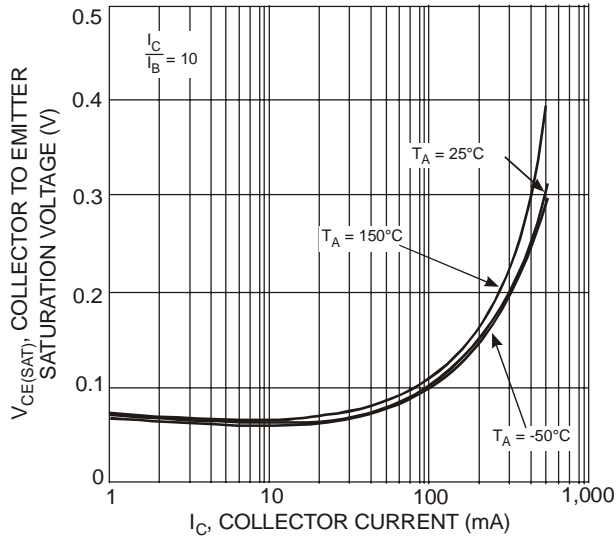


Fig. 5 Collector-Emitter Saturation Voltage vs. Collector Current

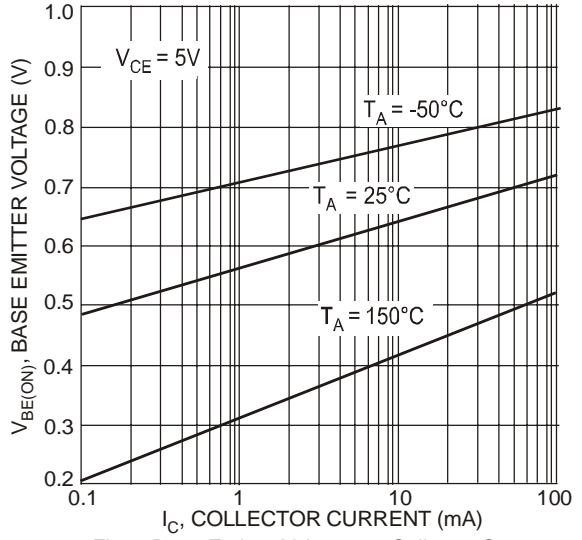


Fig. 6 Base-Emitter Voltage vs. Collector Current

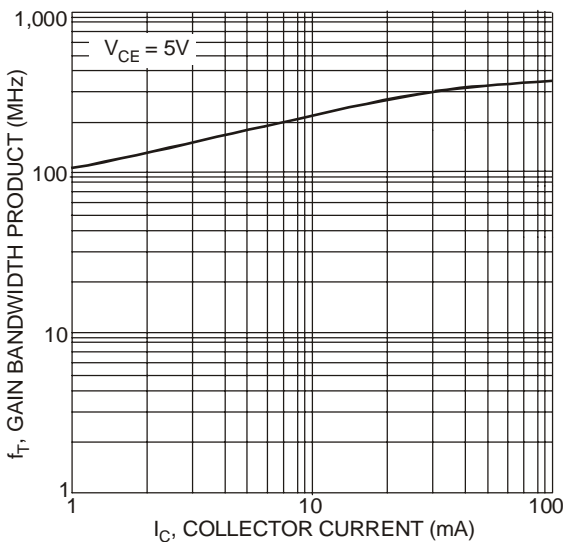



Fig. 7 Gain Bandwidth Product vs. Collector Current

Ordering Information (Notes 4 & 6)

| Device | Packaging | Shipping |
|---------------|-----------|------------------|
| MMST2222A-7-F | SOT-323 | 3000/Tape & Reel |

Notes: 6. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



K3P = Product Type Marking Code
 YM = Date Code Marking
 Y = Year ex: N = 2002
 M = Month ex: 9 = September

Date Code Key

| Year | 1998 | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Code | J | K | L | M | N | P | R | S | T | U | V | W | X | Y | Z |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.