


Multilayer Chip Band Pass Filters For WiMAX


Conformity to RoHS Directive

DEA Series DEA203600BT-1240B2

SHAPES AND DIMENSIONS

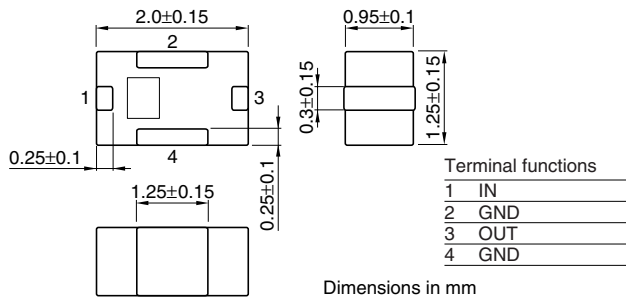

RECOMMENDED PC BOARD PATTERNS

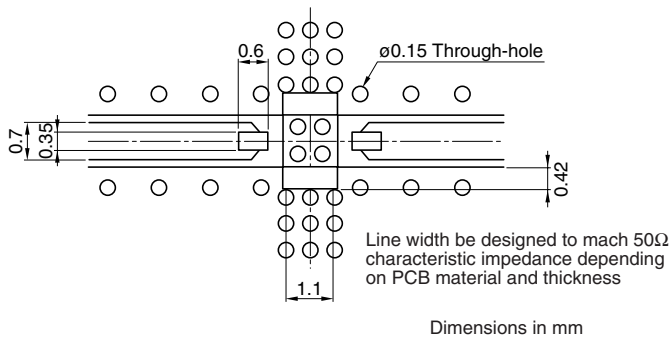

ELECTRICAL CHARACTERISTICS

Item			Minimum value	Typical value	Maximum value
Insertion loss	[3300 to 3900MHz]	(dB)	—	1.4	2.2
	[3300 to 3900MHz]	(dB)	10	15	—
Return loss	[100 to 2600MHz]	(dB)	15	27	—
	[4400 to 6000MHz]	(dB)	10	15	—
Attenuation	[6000 to 9900MHz]	(dB)	25	50	—
	Operating	(°C)	-40	—	+85
Temperature range	Storage	(°C)	-40	—	+85


• Ta: +25°C

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

FREQUENCY CHARACTERISTICS


INSERTION LOSS

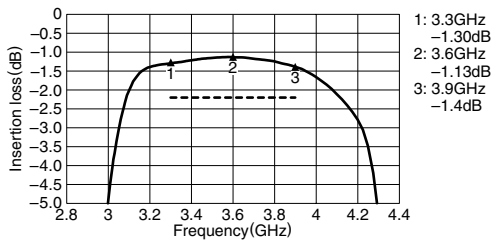

ATTENUATION

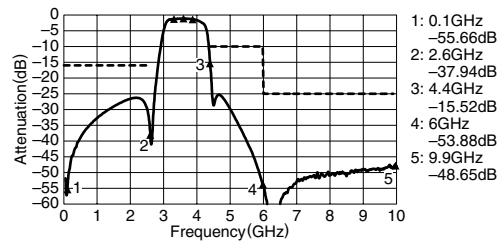

RETURN LOSS

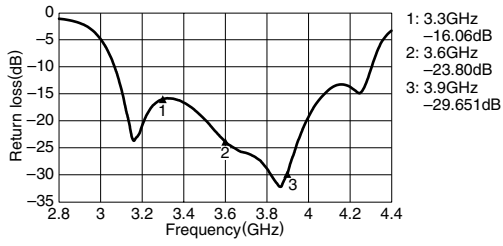

VSWR

