

"High Frequency Ceramic Solutions"

2.6 GHz Band Pass Filter

P/N 2593BP44B186

Detail Specification: 11/21/03

Page 1 of 2


General Specifications

Part Number	2593BP44B186	
Frequency (MHz)	2500 - 2686	
Insertion Loss	2.0 dB max.	
Return Loss	9.5 dB min.	
Attenuation (min.)	1870 ~ 2056 MHz	40 dB

Input Power	500 mW max.
Impedance	50 Ω
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Reel Quantity	2,000


Mechanical Dimensions

	In	mm
L	0.177 ± 0.006	4.50 ± 0.15
W	0.126 ± 0.004	3.20 ± 0.10
T	0.037 ± 0.004	0.95 ± 0.10
a	0.051 ± 0.006	1.30 ± 0.15
b	0.012 ± 0.006	0.30 ± 0.15
c	0.010 ± 0.006	0.25 ± 0.15
d	0.014 ± 0.006	0.35 ± 0.15

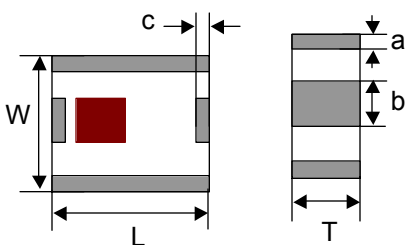

Terminal Configuration

No.	Function
1	GND
2	OUT
3	GND
4	IN




Mounting Considerations

Mount these devices with brown mark facing up.

Line width should be designed to provide 50Ω impedance matching characteristics.

Units: mm

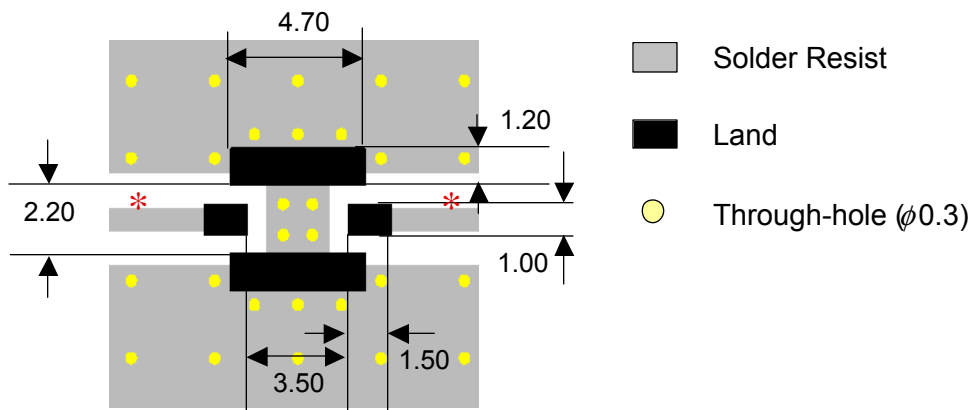

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


2.6 GHz Band Pass Filter

P/N 2593BP44B186

Detail Specification: 11/21/03

Page 2 of 2

Typical Electrical Performance (T=25°C)

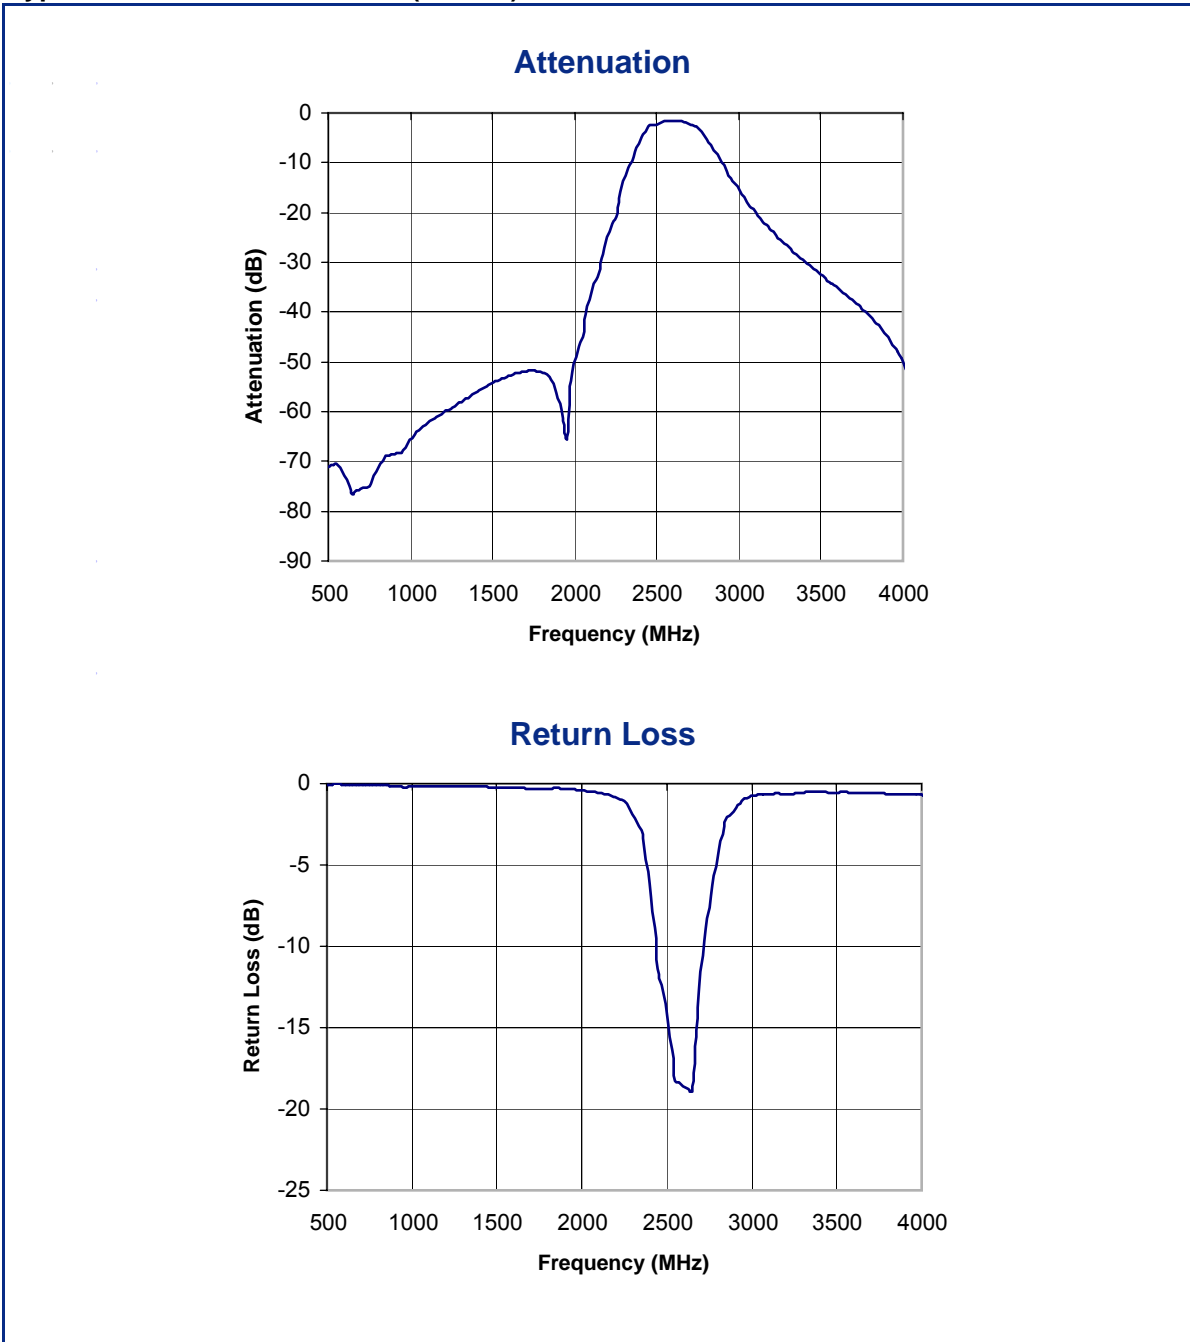

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

931 Via Alondra • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2003 Johanson Technology, Inc. All Rights Reserved