

# Spezifikation für Freigabe / specification for release

Kunde / customer :

Artikelnummer / part number : **7447041**


LF



Bezeichnung : **FUNKENTSTÖRDROSSEL WE-FI**  
 description : **TOROIDAL LINE CHOKE WE-FI**

DATUM / DATE : 2004-10-11

## A Mechanische Abmessungen / dimensions:

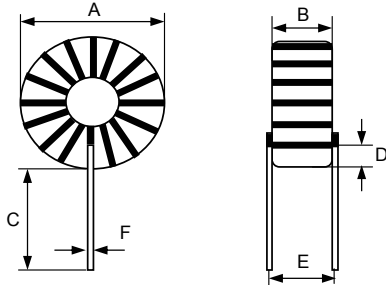

A	<b>12,0 max</b>	mm
B	<b>5,5 max</b>	mm
C	<b>15 ± 2,0</b>	mm
D	<b>1,5 max</b>	mm
E	<b>4,5 ± 2,0</b>	mm
F	<b>ø 0,4 ref</b>	mm

## B Elektrische Eigenschaften / electrical properties:

Eigenschaften / properties	Testbedingungen / test conditions		Wert / value	Einheit / unit	tol.
Leerlauf-Induktivität / inductance	<b>1 KHz / 0,25V</b>	L <sub>O</sub>	<b>68,0</b>	µH	±20%
Nenn-Induktivität / nominal inductivity		L <sub>N</sub>		µH	
DC-Widerstand / DC-resistance		R <sub>DC</sub>	<b>0,100</b>	Ω	<b>max.</b>
Nennstrom / rated current		I <sub>DC</sub>	<b>0,80</b>	A	<b>max.</b>
Eigenres.-Frequenz / self-res.-frequency		SRF		MHz	

## C Lötpad / soldering spec.:

## D Prüfgeräte / test equipment:

**HP 4274 A & HP E3633 A** für/for L<sub>0</sub>/L<sub>N</sub> und/and Q  
**HP 34401 A** für/for I<sub>DC</sub> und/and R<sub>DC</sub>

## E Testbedingungen / test conditions:

Luftfeuchtigkeit / humidity: 33%  
 Umgebungstemperatur / temperature: +20°C

## F Werkstoffe & Zulassungen / material & approvals:

Basismaterial / base material: Eisenpulver / Iron powder  
 Draht / wire: 2 UEW (130°C)

## G Eigenschaften / general specifications:

Lagertemperatur / storage temperature: -40°C - + 125°C  
 Betriebstemp. / operating temperature: -25°C - +105°C

Freigabe erteilt / general release:	Kunde / customer		
.....	Unterschrift / signature		
Datum / date	Würth Elektronik		
.....	Kontrolliert / approved		
Geprüft / checked	Name	Änderung / modification	Datum / date
	MST	Version 2	04-10-11
	SST	Version 1	04-06-15

This electronic component is designed and developed with the intention for use in general electronics equipments. Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body. In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before use. It is essential to give consideration when to install a protective circuit at the design stage.

**Würth Elektronik eiSos GmbH & Co.KG**

D-74638 Waldenbug · Max-Eyth-Strasse 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400  
<http://www.we-online.com>