


Ground wire choke, open design

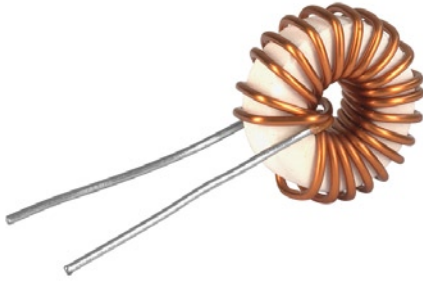

### Description

- Ground wire chokes (earth line chokes)
- THT-terminals

### Standards

- EN 60938

### Applications

- Separating the main earth line to periphery devices
- This type of chokes permits the building of a system free of ground wire loops

### References

[General Product Information](#)


### Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

### Technical Data

Rated Current	16A @ Ta 40 °C	Isolation Voltage	2 kV eff., winding to ambient
Rated inductance	0.04 - 4 mH	Climatic Category	25/100/21 acc. to IEC 60068-1
Power Operating Frequency	< 5 MHz	Allowable Operation Temp.	-25 °C to 100 °C
Terminal technic	THT		
Material: Housing	UL 94V-0		
Sealing Compound	UL 94V-0		

### Dimensions

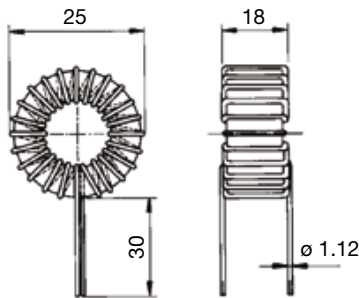

### Variants

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

$I_n$ [A]	$L_n$ [mH]	$R_{cu}$ [mΩ]	$f_{RES}$ [MHz]	Weight [g]	Packing unit [pcs.]	Order Number
16	2	15	0.3	13	50	DENO-23-0001
16	4	27	0.3	25	50	DENO-25-0001
25	4	10	0.3	20	50	DENO-40-0001