

Miniature Fuse with Pigtail, 5.4 x 22.5 mm, Quick-Acting F, L, 250 VAC



## IEC 60127-2 · 250VAC · Quick-Acting F



### Description

- IEC Standard Fuse
- L = Low Breaking Capacity (Glass Tube)

### Standards

- IEC 60127-2/2
- UL 248-14
- CSA C22.2 no. 248.14

### Approvals

- UL File Number: E41599

### Applications

- Primary Protection on PCB


### References

- [General Product Information](#)
- [Time-Current Curves see last page](#)
- [Packaging Details](#)

### Weblinks


- [Approvals, RoHS, CHINA-RoHS, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check](#)


### Technical Data

Rated Voltage	250VAC
Rated Current	0.5 - 10A
Breaking Capacity	35A - 100A
Characteristic	Quick-Acting F
Admissible Ambient Air Temp.	-55 °C to 125 °C
Climatic Category	55/125/21 acc. to IEC 60068-1
Material: Tube	Glass
Material: Endcaps	Nickel-Plated Copper Alloy
Material: Axial Leads	Tin-Plated Copper
Unit Weight	1.48 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 Current Rating, Voltage Rating, Characteristic, Breaking Capacity, Approvals

Soldering Methods	Wave, Iron
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2-20, Test Tb, method 1A

### Dimensions

Length  22.5 mm

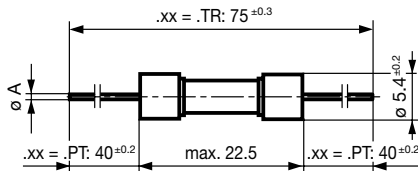


- $I_n \leq 6.3 \text{ A}$ :  $\varnothing A = 0.65 \text{ mm}$
- $8 \text{ A} \leq I_n \leq 12.5 \text{ A}$ :  $\varnothing A = 0.8 \text{ mm}$
- $I_n \geq 16 \text{ A}$ :  $\varnothing A = 1.0 \text{ mm}$

### Pre-Arcing Time

Rated Current $I_n$	1.5 x $I_n$ min.	2.1 x $I_n$ max.	2.75 x $I_n$ min.	2.75 x $I_n$ max.	4.0 x $I_n$ min.	4.0 x $I_n$ max.	10.0 x $I_n$ max.
0.5 A - 6.3 A	60 min	30 min	50 ms	2 s	10 ms	300 ms	20 ms
8 A - 10 A	30 min	30 min	50 ms	2 s	10 ms	400 ms	40 ms

## Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I <sub>n</sub> max. [mV]	Voltage Drop 1.0 I <sub>n</sub> typ. [mV]	Power Dissipation 1.5 I <sub>n</sub> max. [mW]	Power Dissipation 1.5 I <sub>n</sub> typ. [mW]	Melting I <sup>2</sup> t 10.0 I <sub>n</sub> Intyp. [A <sup>2</sup> s]		Order Number
0.5	250	1)	1000	150	1600	200	0.151	●	0034.1513.xx
0.63	250	1)	650	140	1600	300	0.303	●	0034.1514.xx
0.8	250	1)	240	110	1600	300	0.508	●	0034.1515.xx
1	250	1)	200	110	1600	300	1.13	●	0034.1516.xx
1.25	250	1)	200	100	1600	400	1.81	●	0034.1517.xx
1.6	250	1)	190	100	1600	500	2.94	●	0034.1518.xx
2	250	1)	170	90	1600	600	5.28	●	0034.1519.xx
2.5	250	1)	170	90	1600	800	9.19	●	0034.1520.xx
3.15	250	1)	150	90	2500	600	16.1	●	0034.1521.xx
4	250	2)	130	90	2500	1000	25.6	●	0034.1522.xx
5	250	2)	130	80	2500	1300	33.8	●	0034.1523.xx
6.3	250	2)	130	80	2500	2000	53.2	●	0034.1524.xx
8	250	2)	130	80	4000	2300	93.4	●	0034.1525.xx
10	250	2)	130	70	4000	2500	93.4	●	0034.1526.xx

1) 35 A @ 250 VAC

2) 10 In @ 250 VAC

## Packaging Unit

.xx = .PT Bulk (1000 pcs.)

.xx = .TR Taped 33 cm Reel (1000 pcs.)

## Time-Current Curves

