


Part Number: SL32 4R023

Ordering Different Lead Types:

Inside Kinked Leads	Not available
Outside Kinked Leads	Use -B after Ametherm's Part #

For example: to order an outside kinked lead use part number SL32 4R023-B

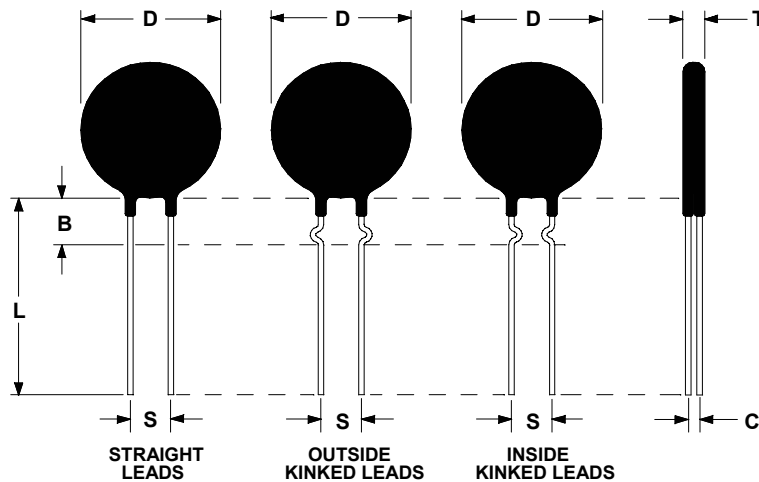

Resistance @ 25°C	4.0 Ω ± 20%
Max Steady State Current Up to 65°C	23.0 A
Max Recommended Energy Rating	200.0 J
Actual Failure Point of Instantaneous Energy	448.0 J
Resistance @ 100 % of Maximum Current	0.020 Ω
Resistance @ 50% of Maximum Current	0.065 Ω
Body Temperature at Maximum Current	236 °C
Dissipation Constant	65.4 mW/°C
Thermal Time Constant	208 seconds
Material Type	"G"
Maximum Capacitance @ 240/440 VAC	3400 μF/ 1000 μF

D	30.0 ± 2.5 mm
T	6.35 ± 0.4 mm
Lead Diameter	1.3 ± 0.1 mm
S	7.8 ± 2.0 mm
L	38.0 ± 9.0 mm
Coating Run Down Straight Leads	5.0 ± 1.0 mm
B	7.8 mm Nom
C	3.82 ± 1.0 mm

Revision Date April 26, 2005