


**Specification Status: RELEASED**

**Electrical Rating**  
**Voltage: 30V MAX**  
**Current: 100A MAX**

Leads:  
 Nickel: 0.125 mm Nominal Thickness

Tape:  
 Polyester

Marking:  
 \_\_\_\_\_ Manufacturer's Mark  
 XX 350 \_\_\_\_\_ Part Identification  
 □□□□ \_\_\_\_\_ Lot Identification

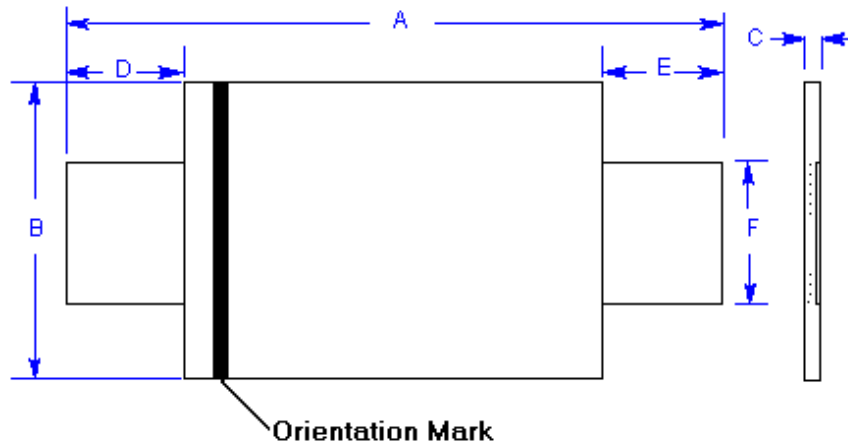

**TABLE I. DIMENSIONS:**

	A		B		C		D		E		F		G	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	28.4	31.8	13.0	13.5	0.5	1.1	6.3	8.9	6.3	8.9	6.0	6.6	--	--
in*:	(1.12)	(1.25)	(0.51)	(0.53)	(0.02)	(0.04)	(0.25)	(0.35)	(0.25)	(0.35)	(0.24)	(0.26)	--	--

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS:**

I HOLD	CURRENT TRIP LIMITS								TIME TO TRIP	REFERENCE RESISTANCE	ONE-HOUR POST-TRIP RESISTANCE	TRIPPED-STATE POWER DISSIPATION				
	AMPS AT 0°C		AMPS AT 20°C		AMPS AT 60°C		AMPS AT 80°C						SECONDS AT 20°C, 20 A		OHMS AT 20°C	
20°C HOLD	AMPS HOLD	AMPS TRIP	AMPS HOLD	AMPS TRIP	AMPS HOLD	AMPS TRIP	AMPS HOLD	AMPS TRIP	TYP	MAX	MIN	MAX	MIN	MAX	TYP	MAX
3.5	4.3	7.2	3.5	6.3	2.5	4.4	--	--	1.5	3.0	0.017	0.031	0.017	0.050	1.9	2.5

Recognitions: UL/TUV approved  
 Reference Documents: PS300  
 Precedence: This specification takes precedence over documents referenced herein.  
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.  
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.