

PolySwitch®
PTC Devices
Overcurrent Protection Device

Raychem Circuit Protection Products

PRODUCT: TRF250-145

DOCUMENT: SCD 26221
PCN: RF0021-000, RF0035-000
REV LETTER: D
REV DATE: MAY 22, 2007
PAGE NO.: 1 OF 1

Specification Status: RELEASED


Max Electrical Rating at 20°C

Operating Voltage: 60V_{DC}
Interrupt Current: 3A_{RMS}

Fault Voltage: 250V_{RMS}

Lead Material: 22 AWG Sn plated copper
(0.65 mm [0.026"] nominal diameter)

External Coating Material: Cured, flame retardant epoxy polymer, meeting UL94 V-0 requirements.

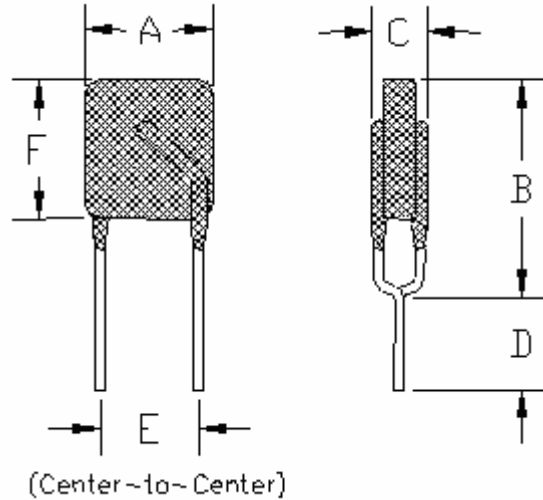

Marking:

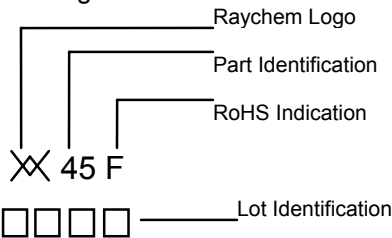


TABLE I. DIMENSIONS:

	A		B		C		D		E	F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	NOM	MIN	MAX
mm:	--	6.5	--	11.0	--	4.6	4.7	--	5.0	--	7.0
in:	--	(0.256)	--	(0.433)	--	(0.180)	(0.185)	--	(0.197)	--	(0.276)

TABLE II. PERFORMANCE RATINGS @ 20°C (unless otherwise noted):

IHOLD (A)	ITRIP (A)	RESISTANCE (Ω) @ 20°C			TIME TO TRIP (s) @ 1A	
		R MIN	R MAX	R _{1 MAX} *	TYP	MAX
20°C	20°C					
0.145	0.290	3.0	6.0	14.0	2.5	5.0

* Maximum device resistance at 20°C measured 1 hour post trip.

Additional Ratings @ 20°C
Lightning Withstand ITU-T @ 1.5kV

Agency Recognition: UL, CSA, TUV
Reference Documents: PS300
Precedence: This specification takes precedence over documents referenced herein.
Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

ROHS Compliant



ELV Compliant



Pb-Free

