


SX30U

30 Watt, 120 VAC Input Fully Enclosed Switching Power Supply

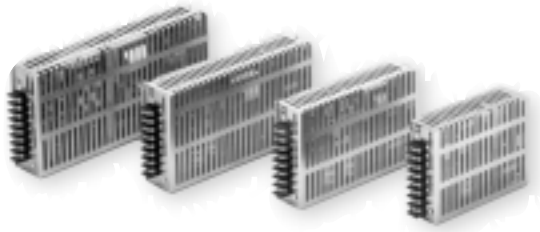

FEATURES

- ✔ **OVERVOLTAGE PROTECTION**
- ✔ **OVERCURRENT PROTECTION**
- ✔ **COMPACT SIZE / HIGH RELIABILITY**
- ✔ **CONVECTION COOLED**
- ✔ **ON/OFF LED LIGHT**
- ✔ **ADJUSTABLE OUTPUTS**
- ✔ **3 YEAR CONTINUOUS USE WARRANTY**

SAFETIES / EMI



FCC-B
CISPR-B
VCCI-2

ELECTRICAL SPECIFICATIONS

All specifications are typical at nominal input, full load

INPUT SPECIFICATIONS

Input Voltage.....	85-132 VAC
Input Frequency.....	50/60 Hz (47-63Hz)
Input Current.....	0.7 A (typ)
Inrush Current.....	20 A (typ)

OUTPUT SPECIFICATIONS

Output Voltage.....	See chart
Output Adjustment.....	± 10%
Efficiency.....	72-79%
Over-Voltage Protection.....	Zener Limiter
Over-Current Protection.....	Over 105% (Automatic Recovery)
Ripple and Noise.....	150 mVp-p
Hold-Up Time.....	20 mS (typ)
Line/Load Regulation.....	See Chart
Rise Time.....	100 mS max.
Leakage Current.....	0.5 mA max.

GENERAL SPECIFICATIONS

MTBF.....	>260,000 Hours
Isolation Voltage	
Primary to Secondary.....	AC 2000V
Primary to Case.....	AC 2000V
Secondary to Case.....	AC 500V
Isolation Resistance.....	Input - Output Case 100 M-Ohm min

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	0°C ~ +60°C
	Derates linearly 2.5%/°C after 50°C
Cooling.....	Convection
Temperature Coefficient.....	0.02% / °C
Humidity.....	20 - 85% RH (not-condensing)
Storage Temperature.....	-20°C ~ +85°C
Shock/Vibration.....	20G (3 Directions)


PHYSICAL SPECIFICATIONS

Metal Enclosed - Terminal Block

Series

MODEL	OUTPUT VOLTAGE	OUTPUT CURRENT	EFFICIENCY (TYP)	LINE REGULATION	LOAD REGULATION	RIPPLE NOISE
SX30U-05S	5 VDC	6.0 A	72%	20 mV	40 mV	150 mVp-p
SX30U-12S	12 VDC	2.6 A	76%	30 mV	60 mV	150 mVp-p
SX30U-15S	15 VDC	2.1 A	77%	30 mV	60 mV	150 mVp-p
SX30U-24S	24 VDC	1.4 A	79%	30 mV	60 mV	150 mVp-p

SX30U

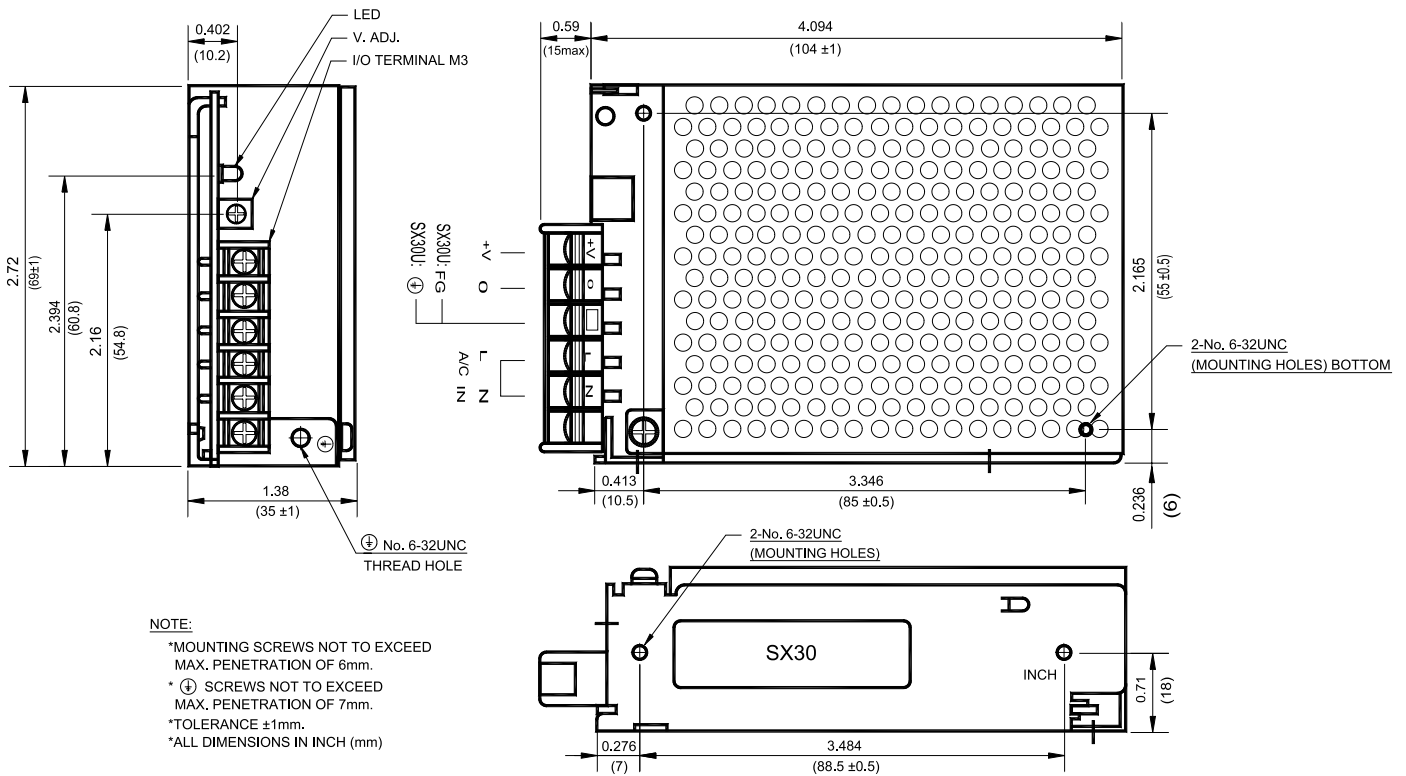

NOTE:

All specifications typical and nominal / full load and 25°C unless otherwise noted.
 Mounting screw length should not exceed 0.24 inches or 6mm.
 Avoid sustained operation in overload or dead short conditions.
 Specifications subject to changes without notice.

- No. 6-32 mounting holes standard
- Dimensions in mm
- Terminal block or "pin" type connector available