

REV. Status
REVISION - 10/22/01 RJ
REVISION A REVISED PLUG LOCATION. ADDED RoHS 05/22/06 MP

- A. Electrical specifications
1. Input voltage: AC 120V ±10% 60Hz ±0.5Hz
 2. Output voltage and current: DC 15V at 250mA

V_{in}	100% Load	No Load
108	11.5VDC MIN	-
120	14.5-15.5VDC	23.0VDC MAX
132	-	25.0VDC MAX



NOTE: Specification applies after 10 minutes warm-up with full load and at any operating temperature.

3. Operating temperature: -10 °C to +40 °C
4. Storage temperature: -20 °C to +85 °C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: 1000Vrms 1 minute @ input to output


B. Typical performance data test Condition:
Ta= +25°C measured after 10 minute warm-up with input at 120V 60Hz

C. Safety agencies
UL and cUL File No. E218172


D. Nameplate: Information is as follows:
Metallic letters on a black background



TYPICAL PERFORMANCE CHART

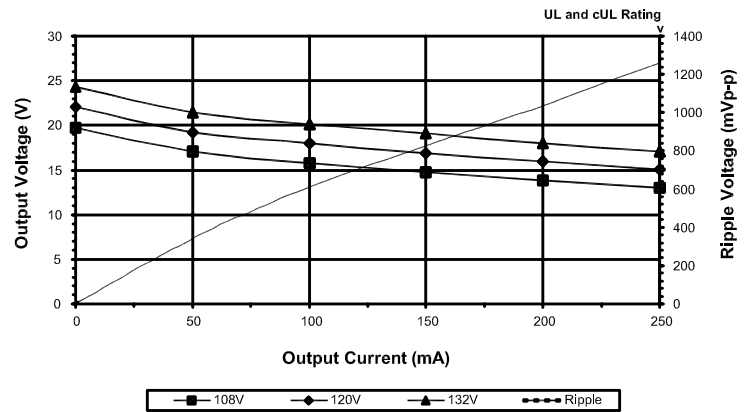

E. Mechanical Specifications
All dimensions shown are nominal unless otherwise specified

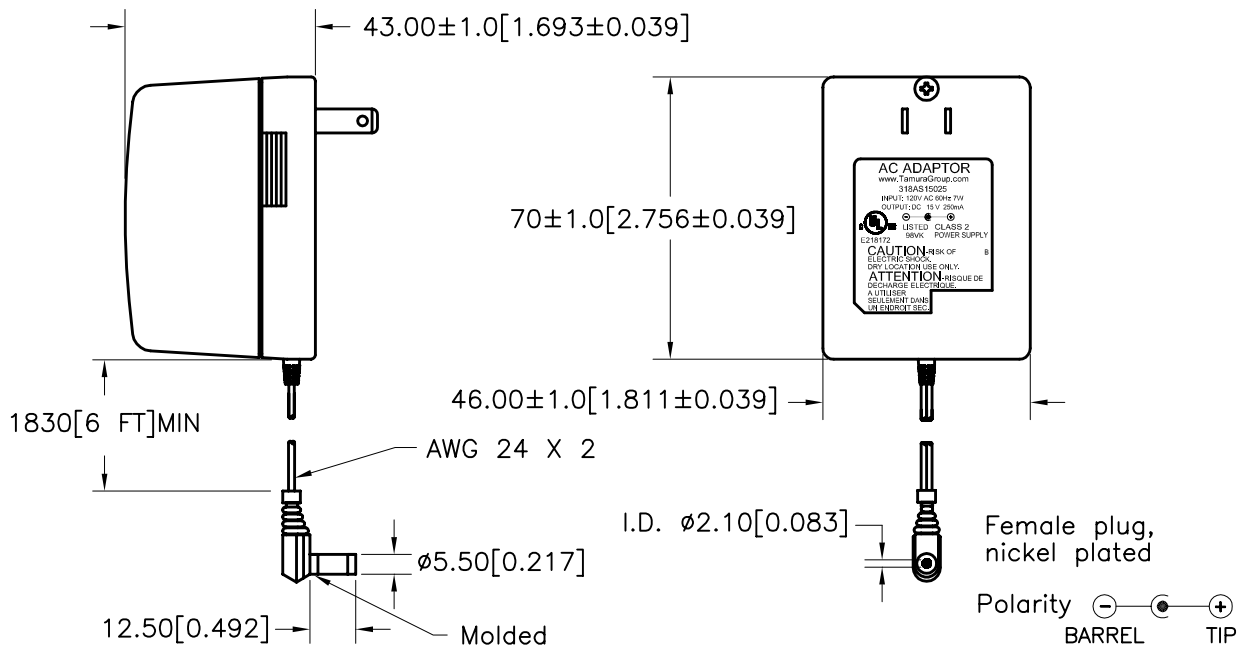

PREPARED BY:
K. BRENNAN

ENGINEER: M. PITCHAI
DWG CONTROL NO. P-A7-12934
REV A
ACAD\PS\A7129341.DWG

UL/cUL DC 15V 250mA
POWER SUPPLY
TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(951) 699-1270 FAX 9516769482

318AS15025

MODEL SPECIFICATION

QUALITY CONTROL:
T. CLEM

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

DIM: mm(In) SCL: NONE SH: 1 OF 1

APPROVED:
Y. SEKIGUCHI

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.