

# NARR-O-GIDE™

## Narrow Width Press in Card guides

- 17 Standard Lengths from 2-½" to 8-½" in ½" increments
- Precision Molded for strength and rigidity
- Stainless Steel Conductive Inserts available for all lengths (see page 13)
- Narrow width allows for higher densities and optimum air flow

NARR-O-GIDE, was introduced to meet the demand for tighter PCB packaging densities in modern card cages. Rigid, strong and economical, NARR-O-GIDES provide the design flexibility and installed reliability that your most demanding products require. Retention is firm via a simple press-fit application and there are no special tools or fixtures required.

### Mounting Information:

Snap-in metal plates: 0.047" - 0.085" (1.2mm - 2.2mm) thick  
 Hole Size: Front - 0.125" (3.2mm) diameter + 0.003 (0.08mm) - 0.001 (0.03mm) Rear & Center - 0.120 (3.0mm) x 0.218 (5.50mm)

### Standard Material Specifications:

UL Rated 94V-2 Natural, 6/6 Nylon per ASTM D4066 PA111  
 Oxygen Index: +28%  
 UL File #E84658


### Optional 94V-O Material Specifications:

UL Rated 94V-0, White (suffix 94V-0 WE) or Black (suffix 94V-0 BK), 6/6 Nylon per ASTM D4066 PA111. Subject to minimum order.  
 Oxygen Index: +28%  
 UL File #E84658

### Application Notes:

Slotting or elongating of the second and third mounting hole is recommended to allow for length variations and to provide for easier assembly.

Prolonged pre-assembly exposure to high humidity can cause molded Nylon components to "grow" out of tolerance. Storage in a cool dry place is recommended. Open sealed vapor barrier bags at the time of production to assure optimum shelf life.

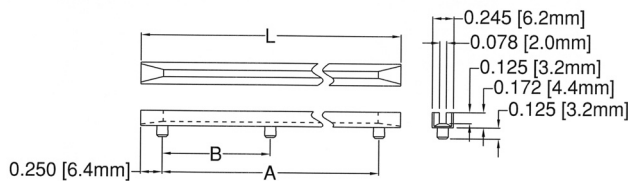

Narr-O-Gide		2-1/2" thru 8-1/2" Lengths		
Part No.	L ±.030 (.76)	A ±.024 (.61)	B ±.016 (.41)	
N-250-2	2.5 (63.5)	2.0 (50.8)	--	
N-300-2	3.0 (76.2)	2.5 (63.5)	--	
N-350-2	3.5 (88.9)	3.0 (76.2)	--	
N-400-2	4.0 (101.6)	3.5 (88.9)	--	
N-450-2	4.5 (114.3)	4.0 (101.6)	--	
N-500-2	5.0 (127.0)	4.5 (114.3)	--	
N-550-2	5.5 (139.7)	5.0 (127.0)	--	
N-600-2	6.0 (152.4)	5.5 (139.7)	--	
N-650-2	6.5 (165.1)	6.0 (152.4)	--	
N-700-2	7.0 (177.8)	6.5 (165.1)	--	
N-700-3	7.0 (177.8)	6.5 (165.1)	3.25 (82.5)	
N-750-2	7.5 (190.5)	7.0 (177.8)	--	
N-750-3	7.5 (190.5)	7.0 (177.8)	3.50 (88.9)	
N-800-2	8.0 (203.2)	7.5 (190.5)	--	
N-800-3	8.0 (203.2)	7.5 (190.5)	3.75 (95.2)	
N-850-2	8.5 (215.9)	8.0 (203.2)	--	
N-850-3	8.5 (215.9)	8.0 (203.2)	4.00 (101.6)	

