


Product Description

Sirenza Microdevices' SGA-1263 is a Silicon Germanium HBT Heterostructure Bipolar Transistor (SiGe HBT) amplifier that offers excellent isolation and flat gain response for applications to 4 GHz.

This RFIC is a 2-stage design that provides high isolation of up to 40dB at 2 GHz and is fabricated using the latest SiGe HBT 50 GHz F_T process, featuring 1 micron emitters with $V_{ceo} > 7V$.

These unconditionally stable amplifiers have less than 1dB gain drift over 125°C operating range (-40C to +85C) and are ideal for use as buffer amplifiers in oscillator applications covering cellular, ISM and narrowband PCS bands.

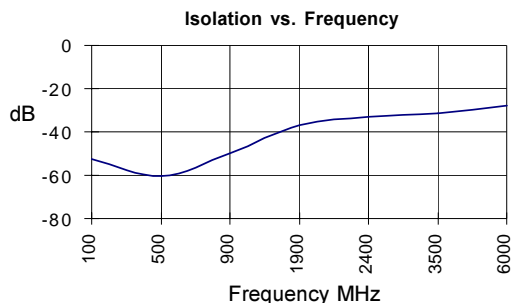

SGA-1263

DC-4000 MHz Silicon Germanium HBT Cascadeable Gain Block



Product Features

- DC-4000 MHz Operation
- Single Supply Voltage
- Excellent Isolation, >50 dB at 900 MHz
- 50 Ohms In/Out, Broadband Match for Operation from DC-4 GHz
- Unconditionally Stable

Applications

- Buffer Amplifier for Oscillator Applications
- Broadband Gain Blocks
- IF Amp

Symbol	Parameters: Test Conditions: $Z_0 = 50 \text{ Ohms}$, $I_d = 8 \text{ mA}$, $T = 25^\circ\text{C}$		Units	Min.	Typ.	Max.
P_{1dB}	Output Power at 1dB Compression	$f = 850 \text{ MHz}$ $f = 1950 \text{ MHz}$	dBm dBm		-7.8 -7.4	
S_{21}	Small Signal Gain	$f = \text{DC} - 1000 \text{ MHz}$ $f = 1000 - 2000 \text{ MHz}$ $f = 2000 - 4000 \text{ MHz}$	dB dB dB	14.3	15.9 15.2 12.3	
S_{12}	Reverse Isolation	$f = \text{DC} - 1000 \text{ MHz}$ $f = 1000 - 2000 \text{ MHz}$ $f = 2000 - 4000 \text{ MHz}$	dB dB dB		56.3 40.6 30.8	
S_{11}	Input VSWR	$f = \text{DC} - 2400 \text{ MHz}$ $f = 2400 - 4000 \text{ MHz}$	-		1.8:1 1.3:1	
S_{22}	Output VSWR	$f = \text{DC} - 2400 \text{ MHz}$ $f = 2400 - 4000 \text{ MHz}$	-		1.8:1 1.9:1	
IP_3	Third Order Intercept Point Power out per Tone = -20 dBm	$f = 850 \text{ MHz}$ $f = 1950 \text{ MHz}$	dBm dBm		2.6 2.8	
NF	Noise Figure	$f = \text{DC} - 1000 \text{ MHz}$ $f = 1000 - 2400 \text{ MHz}$	dB dB		2.7 2.9	
T_D	Group Delay	$f = 1000 \text{ MHz}$	pS		82	
V_D	Device Operating Voltage		V	2.5	2.8	3.1
I_D	Device Operating Current		mA	6	8	10

The information provided herein is believed to be reliable at press time. Sirenza Microdevices assumes no responsibility for inaccuracies or omissions. Sirenza Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Sirenza Microdevices does not authorize or warrant any Sirenza Microdevices product for use in life-support devices and/or systems. Copyright 2001 Sirenza Microdevices, Inc. All worldwide rights reserved.

Parameter	Specification				Test Condition
	Min	Typ.	Max.	Unit	
Bandwidth Frequency Range	DC		4000	MHz	T= 25C
Device Bias Operating Voltage Operating Current		2.8 8		V mA	T= 25C
500 MHz Gain Noise Figure Output IP3 Output P1dB Input Return Loss Isolation		16.0 2.7 4.0 -6.9 8.5 61.6		dB dB dBm dBm dB dB	T= 25C
850 MHz Gain Noise Figure Output IP3 Output P1dB Input Return Loss Isolation		15.7 2.7 2.6 -7.8 8.9 48.4		dB dB dBm dBm dB dB	T= 25C
1950 MHz Gain Noise Figure Output IP3 Output P1dB Input Return Loss Isolation		14.7 3.0 2.8 -7.4 8.8 35.6		dB dB dBm dBm dB dB	T= 25C
2400 MHz Gain Noise Figure Output IP3 Output P1dB Input Return Loss Isolation		14.2 2.8 0.2 -7.0 8.4 33.6		dB dB dBm dBm dB dB	T= 25C


Absolute Maximum Ratings

Parameter	Absolute Limit
Max. Device Current (I_b)	20 mA
Max. Device Voltage (V_D)	5 V
Max. RF Input Power	-12 dBm
Max. Junction Temp. (T_J)	+150°C
Operating Temp. Range (T_L)	-40°C to +85°C
Max. Storage Temp.	+150°C

Operation of this device beyond any one of these limits may cause permanent damage. For reliable continuous operation, the device voltage and current must not exceed the maximum operating values specified in the table on page one.


Bias conditions should also satisfy the following expression:

$$I_b V_D < (T_J - T_L) / R_{TH, J}$$


Pin #	Function	Description	Device Schematic
1	GND	Connection to ground. Use via holes for best performance to reduce lead inductance as close to ground leads as possible.	
2	GND	Sames as Pin 1	
3	RF IN	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.	
4	Vcc	Supply Connection. This pin should be bypassed with a suitable capacitor(s).	
5	GND	Sames as Pin 1	
6	RF OUT	RF output and bias pin. DC voltage is present on this pin, therefore a DC blocking capacitor is necessary for proper operation.	







Application Schematic for +5V Operation at 900 MHz

Note: A bias resistor is needed for stability over temperature

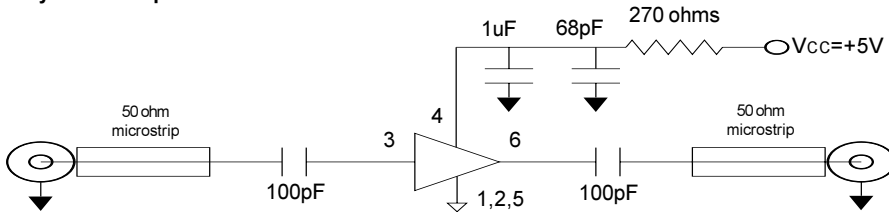


Application Schematic for +5V Operation at 1900 MHz

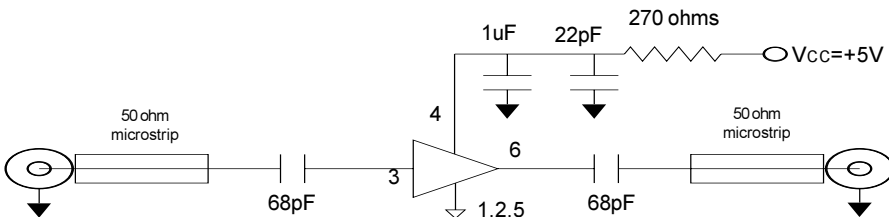


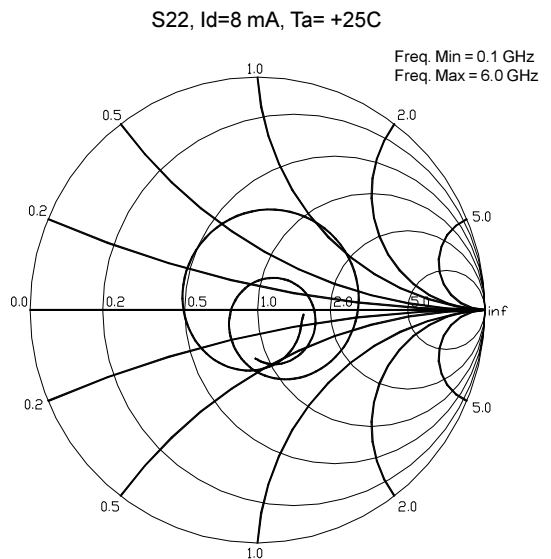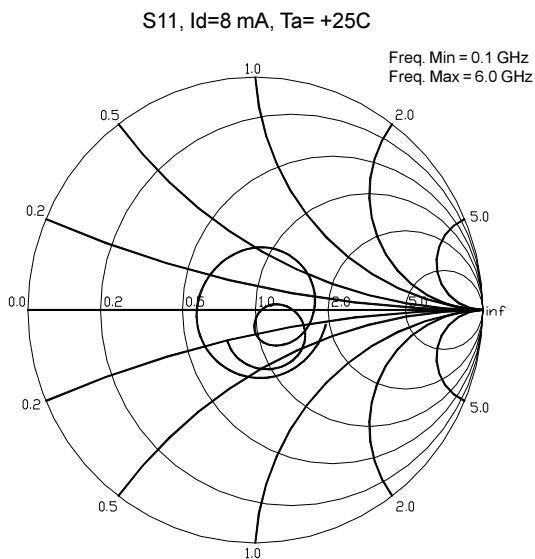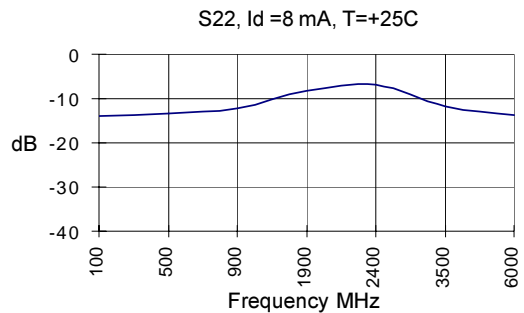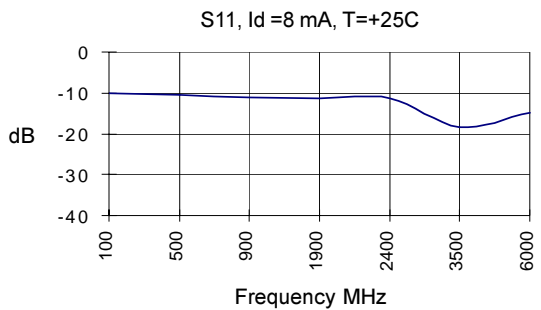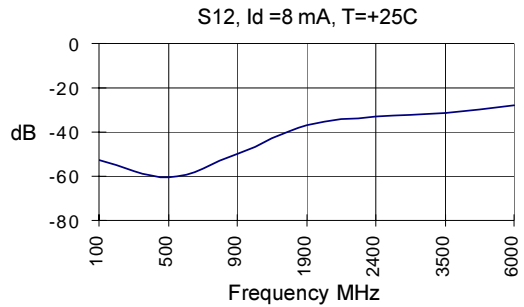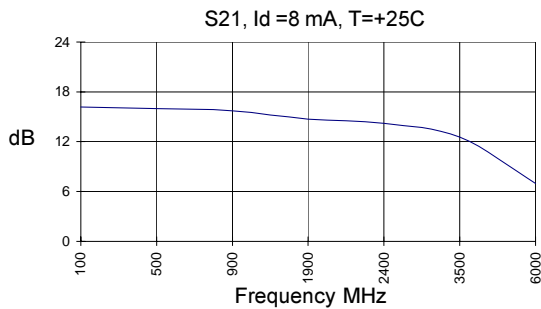


S21, Id=8 mA, T=-40C

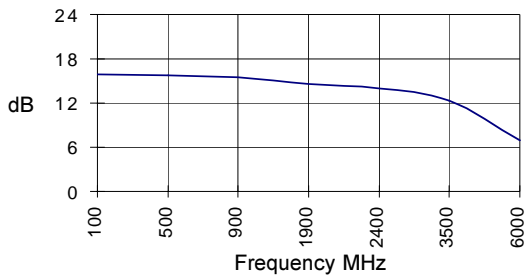


S12, Id=8 mA, T=-40C

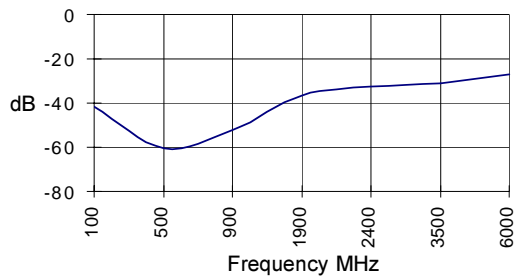


S11, Id=8 mA, T=-40C

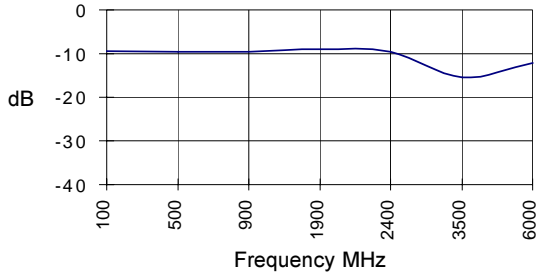


S22, Id=8 mA, T=-40C






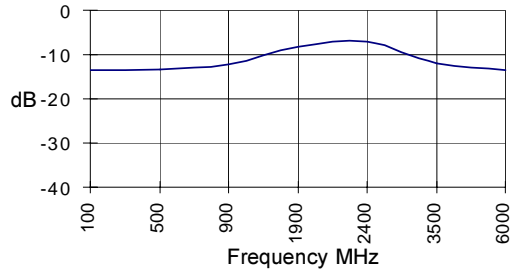


S11, Id=8 mA, T=-40C

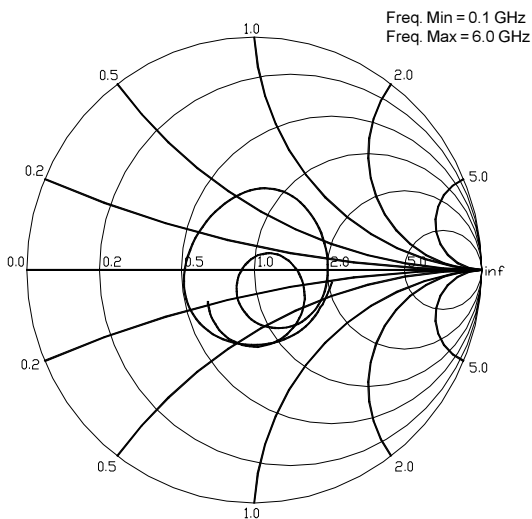

S22, Id=8 mA, T=-40C

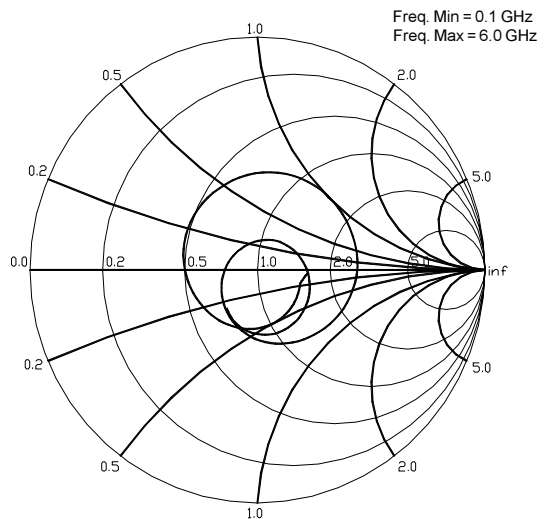

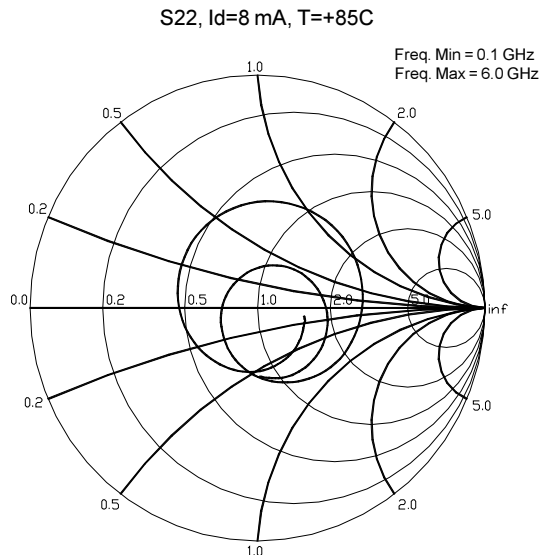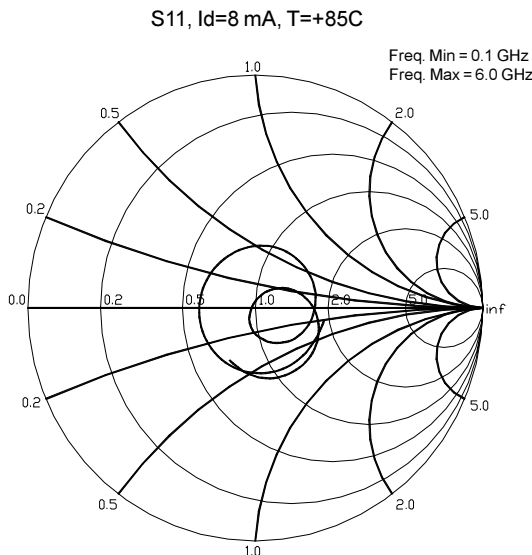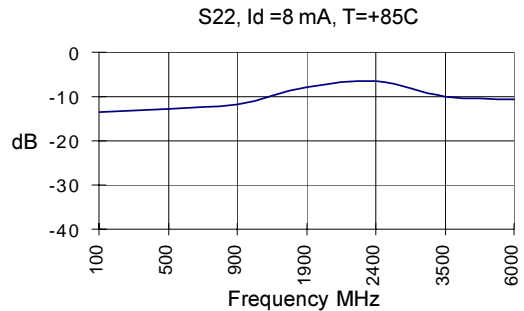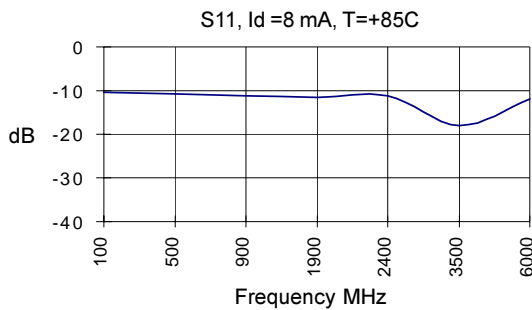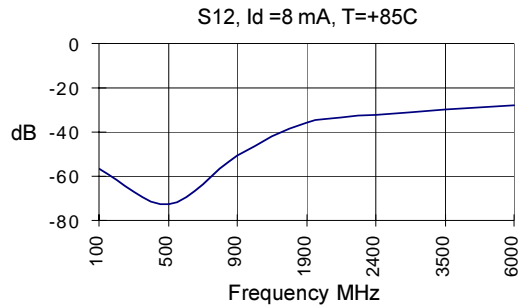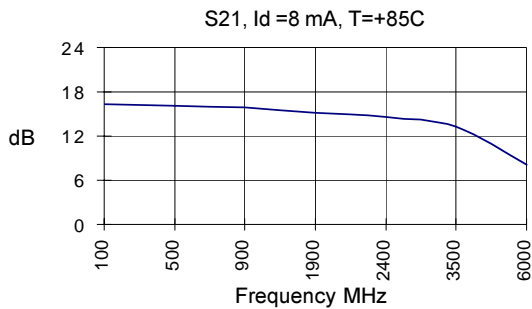

Absolute Maximum Ratings

Part Number Ordering Information

Part Number	Reel Size	Devices/Reel
SGA-1263-TR1	7"	3000


Caution:



Operation of this device above any one of these parameters may cause permanent damage. Appropriate precautions in handling, packaging and testing devices must be observed.

Recommended Bias Resistor Values					
Supply Voltage (Vs)	3.6V	5V	7.5V	9V	12V
Rbias (Ohms)	100	275	588	775	1150


Thermal Resistance (Lead-Junction):
255° C/W

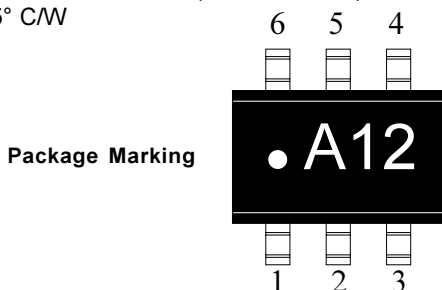

Pin Designation	
1	GND
2	GND
3	RF in
4	Vcc
5	GND
6	RF out

Note: Pin 1 is on lower left when you can read package marking

Package Dimensions

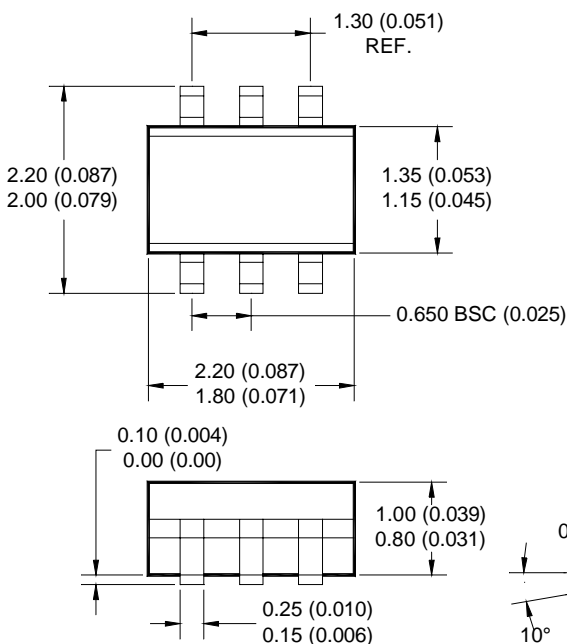

Pad Layout

