

EMG 17-REL/KSR- 24/21-21-LC AU

Order No.: 2941439

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2941439>

Relay module, with soldered-in miniature switching relay, contact (Ag +Au): small to large loads, 2 PDT, input voltage 24 V AC/DC



Commercial data	
EAN	4017918080433
Pack	10 Pcs.
Customs tariff	85364190
Weight/Piece	0.05764 KG
Catalog page information	Page 109 (IF-2007)

Product notes

WEEE/RoHS-compliant since:
05/12/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Coil side**

Nominal input voltage U_N	24 V AC/DC
Input voltage range in reference to U_N	0.8 ... 1.1
Nominal input current at U_N	18 mA
Typical response time	8 ms

Typical release time	10 ms
Operating voltage display	Yellow LED
Name of protection	Bridge rectifier
Protective circuit/component	Bridge rectifier

Contact side

Contact type	Single contact, 2-PDT
Contact material	AgNi, hard gold-plated
Maximum switching voltage	30 V AC 36 V DC
Maximum inrush current	0.2 A
Limiting continuous current	50 mA
Interrupting rating (ohmic load) max.	1.2 W (for 24 V DC)
Note	the following values are applicable if a gold layer is destroyed
Maximum switching voltage	250 V AC/DC
Limiting continuous current	5 A
Maximum inrush current	6 A
Interrupting rating (ohmic load) max.	120 W (for 24 V DC) 95 W (for 48 V DC) 60 W (for 60 V DC) 40 W (for 110 V DC) 55 W (for 220 V DC) 1250 VA (for 250 V AC)

General data

Length	75 mm
Height	62.5 mm
Width	17.5 mm
Test voltage relay winding/relay contact	4 kV AC (50 Hz, 1 min)
Test voltage relay contact/relay contact	1 kV AC (50 Hz, 1 min)
Ambient temperature (operation)	-20 °C ... 40 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Operating mode	100% operating factor
Service life mechanical	Approx. 2×10^7 cycles
Pollution degree	2
Surge voltage category	III

Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
	DIN EN 50178/DIN VDE 0160 (in relevant parts)
Rated surge voltage / insulation	4 kV / basic insulation (safe isolation, increased isolation and 6 kV between input circuit and output contact current paths.)
Mounting position	Any
Assembly instructions	In rows with zero spacing

Connection data

Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3

Certificates / Approvals

Approval logo



requested approbations


Certification	CUL, GOST, UL
---------------	---------------

Accessories

Item	Designation	Description
Marking		
2947035	EMG-GKS 12	Equipment marker, width 12 mm

Drawings

Circuit diagram

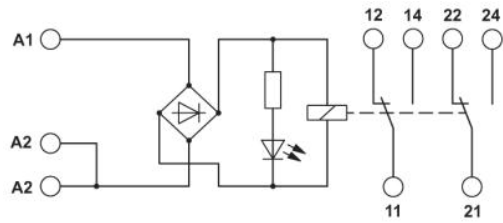

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2008 Phoenix Contact
Technical modifications reserved;